


姿図

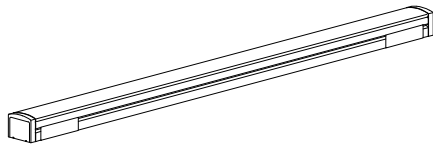



品番	DSY-4049ATG
光源	LED 9.7W 3500K
定格光束	1050 lm
1/2照度角	A-A' 66° B-B' 64°
ビーム角	A-A' 110° B-B' 104°

器具効率	100.0 %
上方光束	4.3 %
下方光束	95.7 %
器具間隔 最大限 (取付高さH)	A 1.29 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)										
	80	70	50	30	10	50	30	10	50	30	10	50	30	10						
室指数	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
	47	56	64	72	78	87	92	96	101	104	38	48	56	64	70	79	86	90	94	99
	33	41	49	57	64	73	80	86	92	97	32	41	49	57	63	72	79	84	89	95
	46	55	63	71	76	84	90	94	99	102	44	53	61	68	73	81	86	89	94	98
	37	46	53	61	66	75	81	85	90	94	37	46	53	61	66	75	81	85	89	93
	32	40	48	55	61	70	77	82	87	91	32	40	48	55	61	70	77	82	87	91
	43	51	58	65	70	77	82	85	89	92	43	51	58	65	70	77	82	85	89	92
	36	45	52	59	64	72	78	82	87	90	36	45	52	59	64	72	78	82	87	90
	32	40	47	54	60	68	74	79	84	87	32	40	47	54	60	68	74	79	84	87
	29	37	44	51	56	64	70	74	79	82	29	37	44	51	56	64	70	74	79	82

A-A'

B-B'

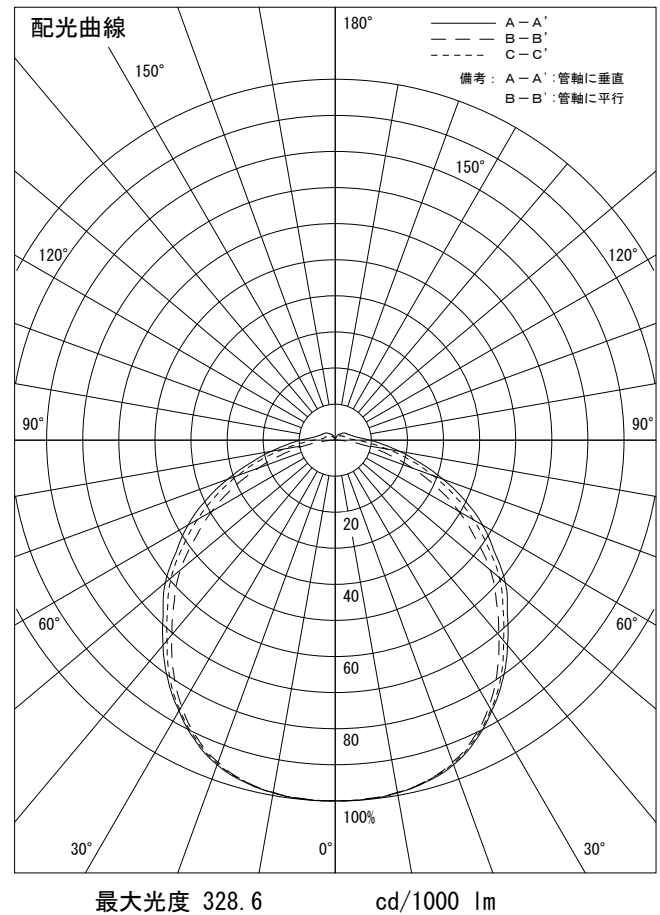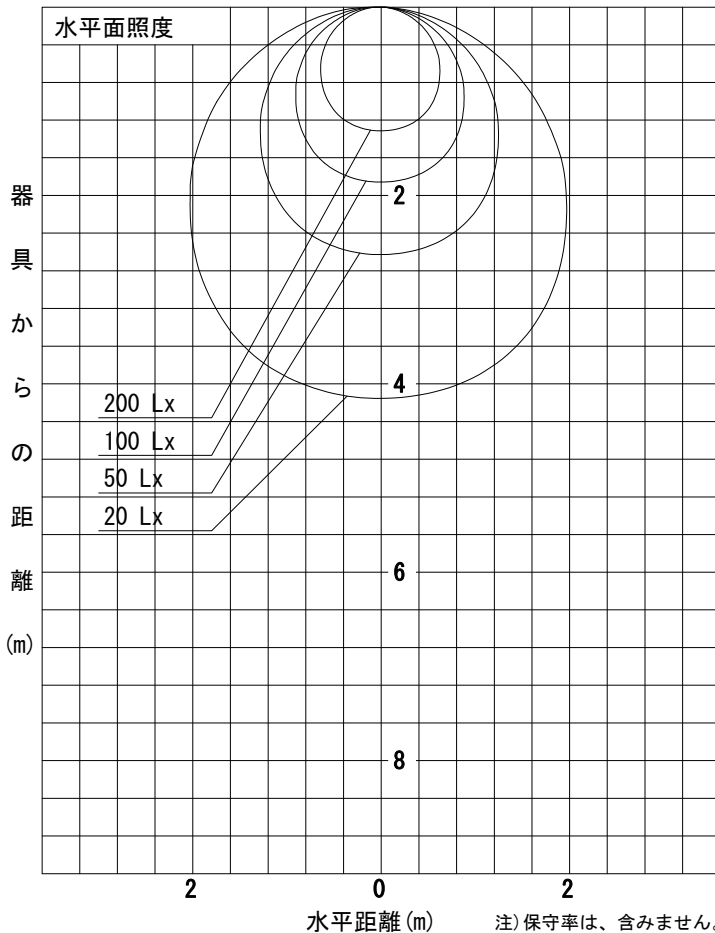

注) 保守率は、含みません。