


姿図

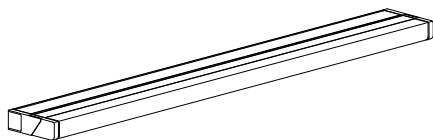

品 番	DSY-4519AWG
光 源	LED 29W 3500K
定格光束	1880 lm
1/2照度角	(A33° A' 23°) B-B' 58°
ビーム角	(A87° A' 30°) B-B' 86°

器具効率	100.0 %
上方光束	16.0 %
下方光束	84.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.11 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		43	35	29	42	34	29	39	33	28	37	31	27	24
0.8		52	43	37	50	42	36	47	40	35	44	38	33	30
1		60	51	44	58	49	43	54	47	41	50	44	39	35
1.25		67	58	51	64	56	50	60	53	48	56	50	45	40
1.5		72	64	57	70	62	56	65	58	53	60	55	50	45
2		80	73	66	77	70	65	72	66	61	67	62	58	52
2.5		86	79	73	83	76	71	77	71	67	71	67	63	56
3		90	84	78	87	81	76	80	75	71	74	70	67	60
4		95	90	85	91	87	82	85	81	77	78	75	72	64
5		99	94	90	95	90	87	87	84	81	81	78	76	67

