

姿図





品番	LLD-7141YUM5+LZA-92127
光源	LED 25.0W 3000K
定格光束	470 lm
1/2照度角	A-A' 33° B-B' 15°
ビーム角	A-A' 38° B-B' 15°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H
	B 0.26 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
室指数	照明率 (×0.01)														
0.6	84	80	77	84	79	76	83	79	76	82	78	76	75		
0.8	89	85	82	89	84	81	87	84	81	86	83	80	79		
1	95	90	87	94	90	87	92	89	86	91	88	85	83		
1.25	99	95	92	98	94	91	96	93	90	94	91	89	87		
1.5	102	98	95	101	97	94	98	96	93	96	94	92	89		
2	107	104	101	105	103	100	103	100	98	100	98	97	94		
2.5	110	108	105	109	106	104	105	104	102	103	101	100	96		
3	113	110	109	111	109	107	108	106	105	104	103	102	99		
4	115	113	112	113	112	110	109	108	107	106	105	104	100		
5	116	115	114	114	113	112	110	110	109	107	106	106	101		

A-A'

B-B'

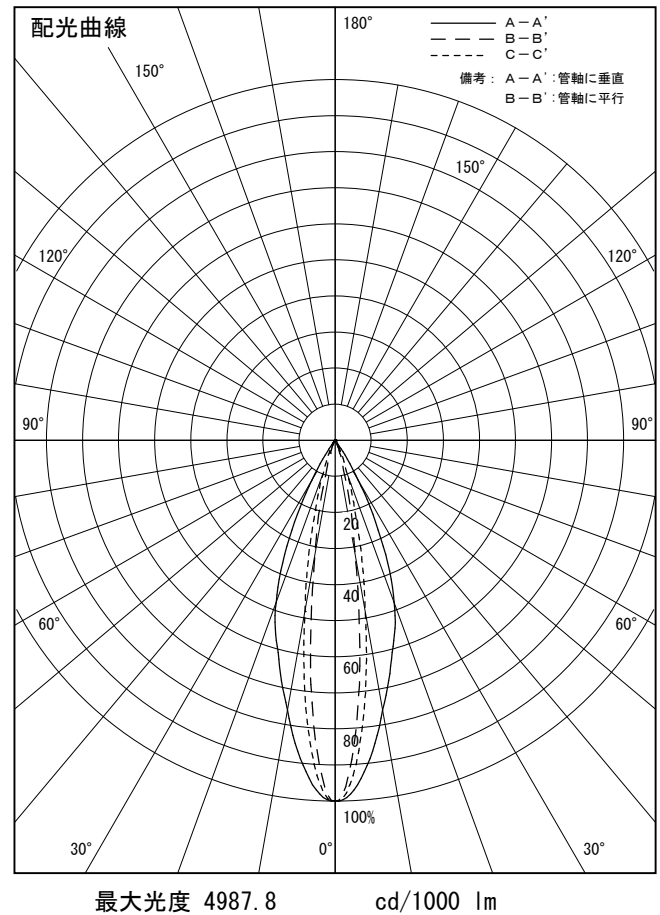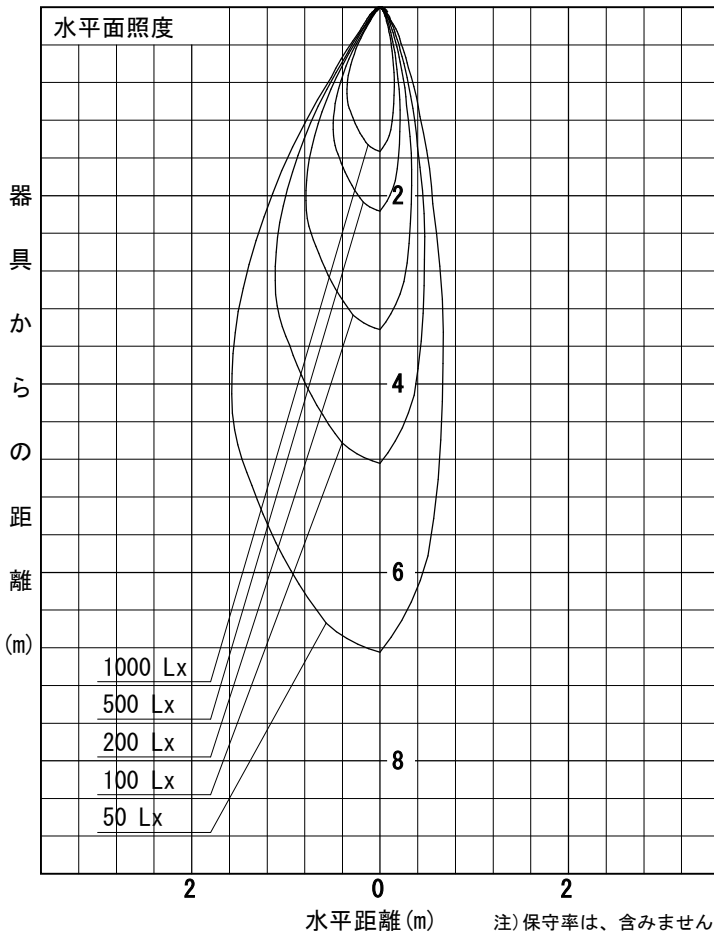

注) 保守率は、含みません。