


姿図

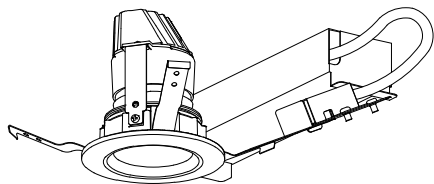

品番	LLD-7058YUB5
光源	LED 13.7W 3000K
定格光束	830 lm
1/2照度角	51°
ビーム角	54°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.95 H B
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	84	80	77	84	80	77	83	79	77	82	79	76	75	
0.8	89	85	82	89	84	81	87	84	81	86	83	81	79	
1	94	90	87	94	90	87	92	89	86	90	88	85	83	
1.25	98	94	91	97	94	91	95	92	90	94	91	89	87	
1.5	101	98	95	100	97	94	98	95	93	96	93	91	89	
2	106	103	100	105	102	100	102	100	98	99	98	96	93	
2.5	109	107	105	108	105	103	105	103	101	102	100	99	96	
3	112	110	108	110	108	107	107	105	104	104	103	102	98	
4	114	112	111	112	111	109	108	107	106	105	104	104	99	
5	115	114	113	113	112	111	109	109	108	106	105	105	100	

