


姿図

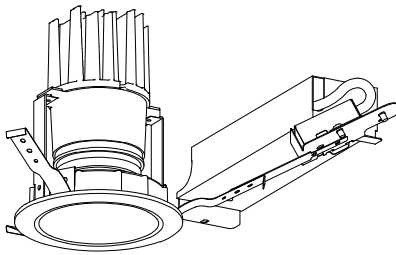

品番	LLD-7085AUB4
光源	LED 23.6W 3500K
定格光束	1930 lm
1/2照度角	48°
ビーム角	54°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.89 H B
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
床		20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	84	79	76	83	79	76	82	79	76	81	78	76	74	
0.8	89	85	81	88	84	81	87	83	81	86	83	80	79	
1	94	90	87	93	89	86	92	88	86	90	87	85	83	
1.25	98	94	91	97	93	91	95	92	90	93	91	89	86	
1.5	101	98	95	100	97	94	98	95	93	96	93	91	89	
2	106	103	100	105	102	99	102	100	98	99	98	96	93	
2.5	109	107	105	108	105	103	105	103	101	102	100	99	96	
3	112	110	108	110	108	107	107	105	104	104	103	102	98	
4	114	112	111	112	111	109	108	107	106	105	104	104	99	
5	116	114	113	113	112	111	110	109	108	106	105	105	100	

