


姿図

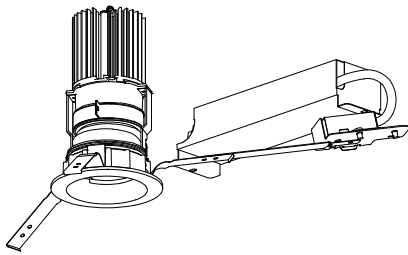



品番	LLD-7141YUW3+LZA-92127
光源	LED 25.0W 3000K
定格光束	465 lm
1/2照度角	A-A' 39° B-B' 27°
ビーム角	A-A' 44° B-B' 29°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.71 H B 0.48 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	84	80	77	84	80	77	83	79	76	82	79	76	75	
0.8	89	85	82	89	85	82	87	84	81	86	83	81	79	
1	95	90	87	94	90	87	92	89	86	91	88	85	84	
1.25	99	95	92	98	94	91	96	93	90	94	91	89	87	
1.5	102	98	95	101	97	94	98	95	93	96	94	92	89	
2	107	103	101	105	102	100	102	100	98	100	98	96	93	
2.5	110	107	105	108	106	104	105	103	102	102	101	100	96	
3	112	110	108	110	109	107	107	106	104	104	103	102	98	
4	115	113	112	113	111	110	109	108	107	106	105	104	100	
5	116	115	114	114	113	112	110	109	109	106	106	105	101	

A-A'

B-B'

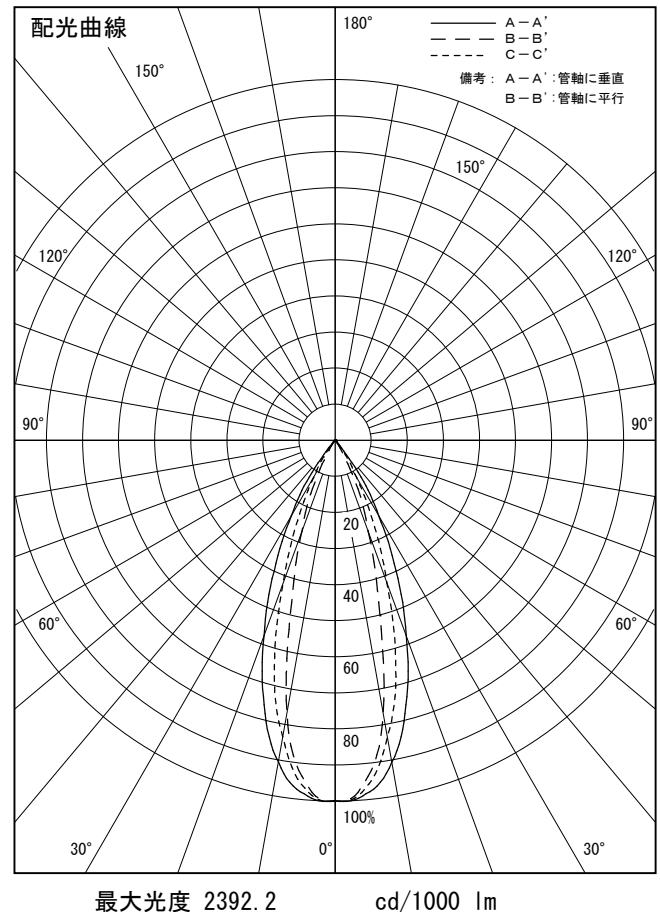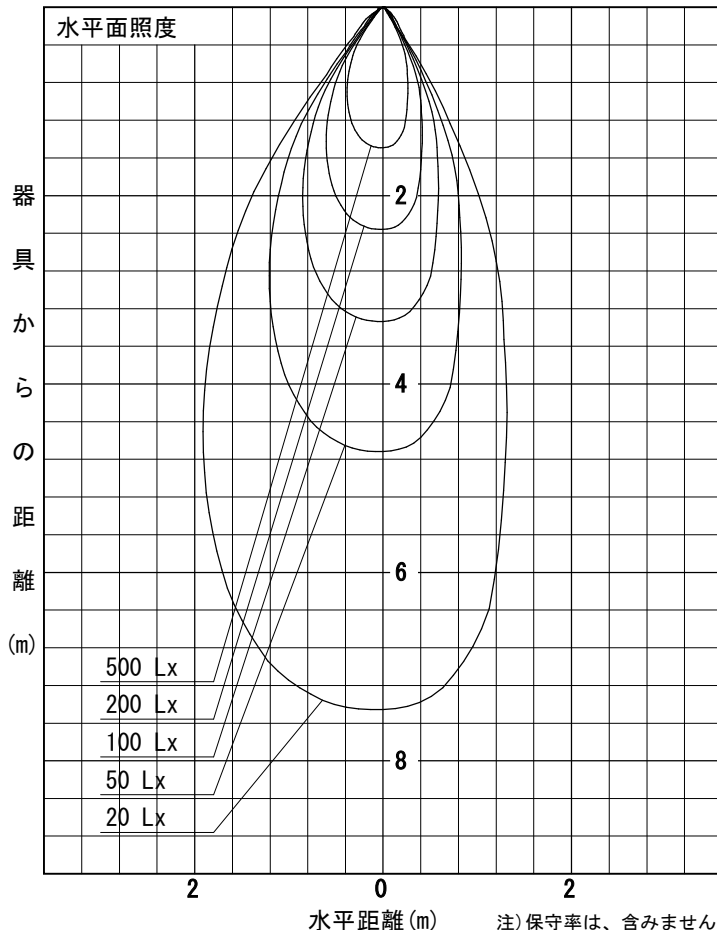

注) 保守率は、含みません。