


姿図

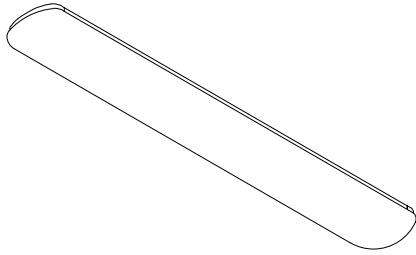

| | |
|--------|---------------------|
| 品番 | DCL-39921W |
| 光源 | LED 28W 5000K |
| 定格光束 | 3550 lm |
| 1/2照度角 | A-A' 66° B-B' 64° |
| ビーム角 | A-A' 120° B-B' 106° |

| | |
|------------------------|----------|
| 器具効率 | 100.0 % |
| 上方光束 | 8.9 % |
| 下方光束 | 91.1 % |
| 器具間隔 最大限 (取付高さH) | A 1.29 H |
| | B 1.24 H |
| 保守率 | 良 0.69 |
| | 中 0.67 |
| | 否 0.63 |

| 反射率 (%) | 天井 | | | | 壁 | | | | 床 | | | | |
|---------|------------------|----|----|----|----|----|----|----|----|----|----|----|----|
| | 80 | 70 | 50 | 0 | 50 | 30 | 10 | 0 | 50 | 30 | 10 | 0 | |
| 室指数 | 照 明 率 (× 0.01) | | | | | | | | | | | | |
| 0.6 | 44 | 35 | 29 | 42 | 35 | 29 | 41 | 33 | 28 | 39 | 32 | 28 | 25 |
| 0.8 | 53 | 44 | 38 | 52 | 43 | 37 | 49 | 42 | 36 | 47 | 40 | 35 | 32 |
| 1 | 61 | 52 | 45 | 59 | 51 | 45 | 56 | 49 | 43 | 53 | 47 | 42 | 38 |
| 1.25 | 68 | 60 | 53 | 66 | 58 | 52 | 63 | 56 | 50 | 59 | 54 | 49 | 45 |
| 1.5 | 74 | 66 | 59 | 72 | 64 | 58 | 68 | 61 | 56 | 64 | 59 | 54 | 50 |
| 2 | 83 | 75 | 69 | 80 | 73 | 67 | 76 | 70 | 65 | 71 | 66 | 62 | 57 |
| 2.5 | 88 | 81 | 76 | 86 | 79 | 74 | 81 | 75 | 71 | 76 | 72 | 68 | 63 |
| 3 | 92 | 86 | 81 | 90 | 84 | 79 | 84 | 80 | 76 | 79 | 76 | 72 | 66 |
| 4 | 98 | 92 | 88 | 95 | 90 | 86 | 89 | 85 | 81 | 84 | 81 | 78 | 71 |
| 5 | 101 | 96 | 92 | 98 | 94 | 90 | 92 | 88 | 85 | 86 | 84 | 81 | 75 |

A-A'

B-B'

