


姿図



品 番	DDL-6004WBG
光 源	LED 7.8W 5000K
定格光束	660 lm
1/2照度角	62°
ビーム角	94°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
			室指数	照 明 率 (× 0.01)													
			0.6	54	47	42	54	47	42	52	46	41	51	45	41	39	
器具間隔 最大限 (取付高さH)	A	1.21 H	0.8	65	57	52	64	57	52	63	56	51	61	55	51	49	
	B	1.21 H	1	74	66	61	73	66	60	71	64	60	69	63	59	57	
			1.25	81	74	69	80	74	69	78	72	68	76	71	67	64	
保 守 率			1.5	87	80	75	85	79	75	83	78	74	80	76	72	70	
			2	95	89	85	93	88	84	90	86	82	87	84	81	77	
			2.5	99	95	91	98	93	90	94	91	88	91	88	86	82	
			3	103	99	95	101	97	94	97	94	91	94	92	89	85	
			4	107	103	100	105	101	99	101	98	96	97	95	93	89	
			5	109	106	103	107	104	102	103	100	98	99	97	95	91	
			良	0.67													
中	0.63																
否	0.56																

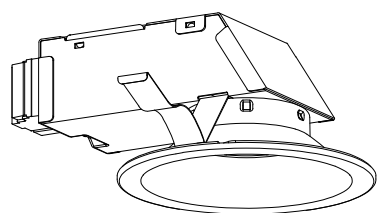