


姿図

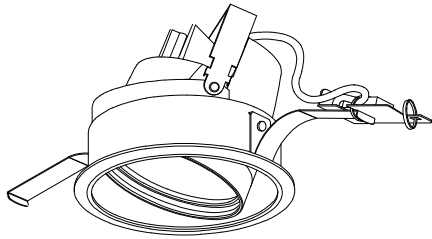

品番	LZD-93508AW+LZA-91115E
光源	LED 14W 3500K
定格光束	1330 lm
1/2照度角	50°
ビーム角	50°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.93 H B
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20			20			20			20			0	
室指数	照 明 率 ( × 0.01 )													
0.6	72	66	63	71	66	62	70	66	62	69	65	62	60	
0.8	80	74	70	79	73	69	77	73	69	76	72	69	67	
1	86	81	76	85	80	76	83	79	75	82	78	75	73	
1.25	92	86	82	91	86	82	88	84	81	86	83	80	78	
1.5	96	91	87	94	90	86	92	88	85	90	87	84	81	
2	102	98	94	100	96	93	97	94	92	95	92	90	87	
2.5	106	102	99	104	101	98	101	98	96	98	96	94	90	
3	108	105	103	107	104	102	103	101	99	100	98	97	93	
4	111	109	107	109	107	105	105	104	102	102	101	100	95	
5	113	111	109	111	109	108	107	106	104	103	102	101	97	

