


姿図

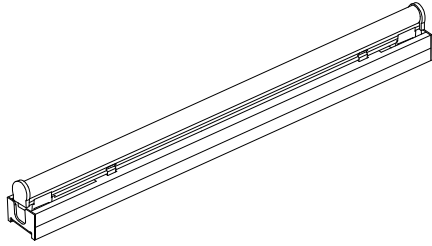



| | |
|--------|-------------------------------|
| 品番 | DSY-3901ATE |
| 光源 | LED 6.5W DECO-LINE L300 3500K |
| 定格光束 | 545 lm |
| 1/2照度角 | A-A' 69° B-B' 64° |
| ビーム角 | A-A' 152° B-B' 108° |

| | |
|------------------------|----------|
| 器具効率 | 100.0 % |
| 上方光束 | 14.8 % |
| 下方光束 | 85.2 % |
| 器具間隔 最大限 (取付高さH) | A 1.37 H |
| | B 1.26 H |
| 保守率 | 良 0.69 |
| | 中 0.67 |
| | 否 0.63 |

| 反射率 (%) | 天井 | | | | 70 | | | 50 | | | 30 | | | 0 |
|---------|------------------|----|----|----|----|----|----|----|----|----|----|----|----|---|
| | 壁 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| | 床 | | | | 20 | | | 20 | | | 20 | | | 0 |
| 室指数 | 照 明 率 (× 0.01) | | | | | | | | | | | | | |
| 0.6 | 41 | 32 | 26 | 39 | 31 | 26 | 37 | 30 | 25 | 35 | 28 | 24 | 21 | |
| 0.8 | 50 | 41 | 34 | 48 | 40 | 34 | 45 | 38 | 32 | 42 | 36 | 31 | 27 | |
| 1 | 58 | 48 | 41 | 56 | 47 | 40 | 52 | 44 | 39 | 48 | 42 | 37 | 33 | |
| 1.25 | 65 | 56 | 49 | 63 | 54 | 48 | 58 | 51 | 45 | 54 | 48 | 43 | 38 | |
| 1.5 | 71 | 62 | 55 | 68 | 60 | 53 | 63 | 56 | 51 | 59 | 53 | 48 | 43 | |
| 2 | 79 | 71 | 64 | 76 | 69 | 63 | 70 | 64 | 59 | 65 | 60 | 56 | 50 | |
| 2.5 | 85 | 77 | 71 | 81 | 75 | 69 | 75 | 70 | 65 | 70 | 65 | 62 | 55 | |
| 3 | 89 | 82 | 76 | 85 | 79 | 74 | 79 | 74 | 70 | 73 | 69 | 66 | 59 | |
| 4 | 94 | 88 | 83 | 91 | 85 | 81 | 84 | 80 | 76 | 78 | 74 | 71 | 64 | |
| 5 | 98 | 93 | 88 | 94 | 89 | 85 | 87 | 83 | 80 | 80 | 78 | 75 | 67 | |

A-A'

B-B'

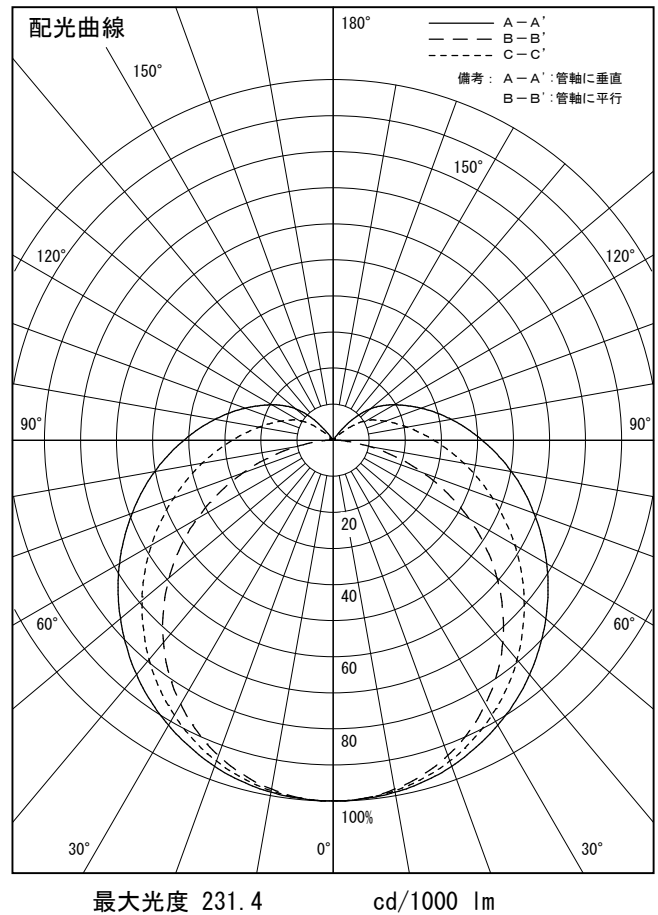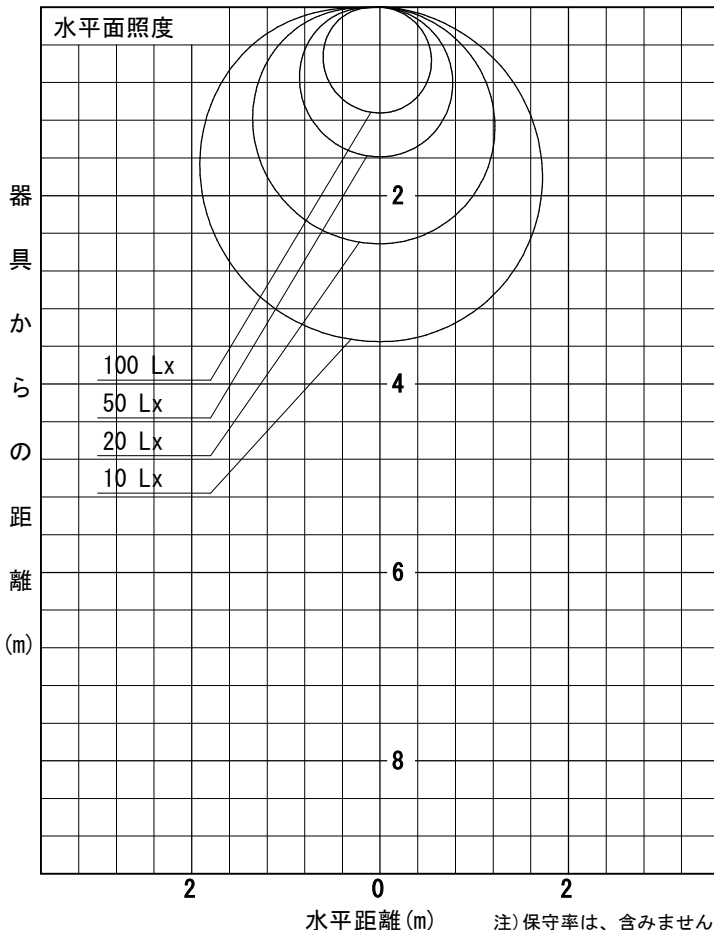

注) 保守率は、含みません。