




品 番	DSL-4720FBG
光 源	LED 8W 5000K-2700K
定格光束	325 lm
1/2照度角	62°
ビーム角	88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.20 H B 1.20 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率(%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		59	52	47	58	52	47	57	51	47	56	51	47	45
0.8		70	63	58	69	62	57	67	61	57	66	61	57	55
1		78	71	66	77	71	66	75	70	65	73	69	65	63
1.25		85	79	74	84	78	74	82	77	73	80	76	72	70
1.5		91	85	80	89	84	80	87	82	78	84	81	77	75
2		98	93	89	96	92	88	93	90	86	91	88	85	82
2.5		102	98	94	100	97	93	97	94	91	94	92	89	86
3		105	101	98	103	100	97	100	97	95	97	94	92	89
4		108	105	103	106	104	101	102	100	98	99	97	96	91
5		110	108	105	108	106	104	104	102	100	100	99	97	93

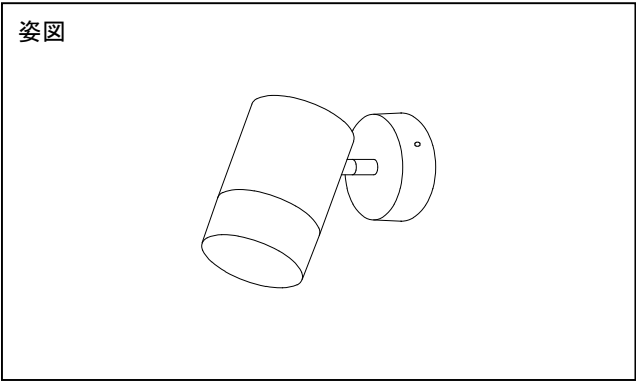