


姿図

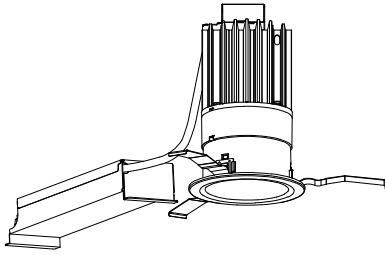

品番	LZD-9030FWW4
光源	LED 29W 5000K
定格光束	2390 lm
1/2照度角	30°
ビーム角	36°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.54 H B
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
床		20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	77	72	68	76	71	68	75	71	68	74	70	68	66	
0.8	83	78	74	83	78	74	81	77	74	80	76	73	72	
1	89	84	81	88	84	80	87	83	80	85	82	79	77	
1.25	94	90	86	93	89	85	91	87	84	89	86	83	81	
1.5	98	94	90	97	93	89	94	91	88	92	89	87	84	
2	103	100	97	102	99	96	99	96	94	97	94	92	89	
2.5	107	104	101	105	103	100	102	100	98	99	98	96	93	
3	110	107	105	108	106	104	105	103	101	101	100	99	95	
4	112	110	108	110	109	107	107	105	104	103	102	101	97	
5	114	112	111	112	110	109	108	107	106	104	103	103	98	

