


姿図

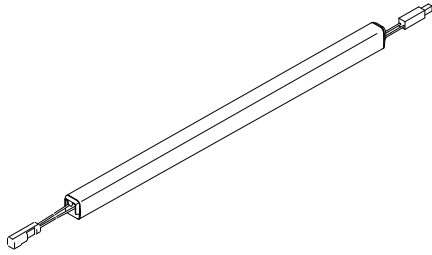

|        |                     |
|--------|---------------------|
| 品番     | LZW-93204YTW        |
| 光源     | LED 4.2W 3000K      |
| 定格光束   | 190 lm              |
| 1/2照度角 | A-A' 80° B-B' 65°   |
| ビーム角   | A-A' 252° B-B' 112° |

|                        |          |
|------------------------|----------|
| 器具効率                   | 100.0 %  |
| 上方光束                   | 29.6 %   |
| 下方光束                   | 70.4 %   |
| 器具間隔<br>最大限<br>(取付高さH) | A 1.68 H |
|                        | B 1.27 H |
| 保守率                    | 良 0.69   |
|                        | 中 0.67   |
|                        | 否 0.63   |

| 反射率 (%) | 天井 |    |    | 壁  |    |    | 床  |    |    | 照明率 (×0.01) |    |    |    |
|---------|----|----|----|----|----|----|----|----|----|-------------|----|----|----|
|         | 80 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30          | 10 | 50 | 30 |
| 室指数     | 38 | 29 | 23 | 36 | 28 | 23 | 33 | 26 | 21 | 29          | 23 | 19 | 15 |
| 0.6     | 47 | 38 | 31 | 45 | 36 | 30 | 40 | 33 | 28 | 36          | 30 | 25 | 20 |
| 0.8     | 55 | 45 | 38 | 52 | 43 | 37 | 46 | 39 | 34 | 41          | 35 | 31 | 25 |
| 1       | 62 | 53 | 45 | 59 | 50 | 44 | 53 | 45 | 40 | 47          | 41 | 36 | 29 |
| 1.25    | 68 | 59 | 51 | 64 | 56 | 49 | 57 | 50 | 45 | 51          | 45 | 41 | 33 |
| 1.5     | 76 | 68 | 61 | 72 | 65 | 58 | 64 | 58 | 53 | 57          | 52 | 48 | 39 |
| 2       | 82 | 74 | 68 | 78 | 71 | 65 | 69 | 64 | 59 | 61          | 57 | 53 | 44 |
| 2.5     | 86 | 79 | 73 | 82 | 75 | 70 | 73 | 68 | 63 | 65          | 61 | 57 | 47 |
| 3       | 92 | 86 | 80 | 87 | 82 | 77 | 78 | 73 | 69 | 69          | 65 | 62 | 52 |
| 4       | 96 | 90 | 86 | 90 | 86 | 81 | 81 | 77 | 73 | 72          | 69 | 66 | 55 |
| 5       |    |    |    |    |    |    |    |    |    |             |    |    |    |

A-A'

B-B'

