


姿図

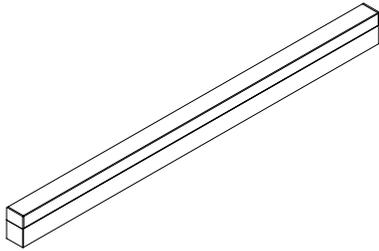



品番	DBL-5496YBG
光源	LED 19.6W 3000K
定格光束	2530 lm
1/2照度角	A-A' 70° B-B' 64°
ビーム角	A-A' 136° B-B' 106°

器具効率	100.0 %
上方光束	15.5 %
下方光束	84.5 %
器具間隔 最大限 (取付高さH)	A 1.40 H
	B 1.24 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
室指数	照 明 率 (× 0.01)														
0.6	42	34	28	41	33	27	38	31	26	36	30	25	22		
0.8	51	43	36	50	41	35	47	39	34	43	37	33	29		
1	59	50	44	57	49	43	53	46	41	50	44	39	35		
1.25	67	58	51	64	56	50	60	53	48	56	50	45	40		
1.5	72	64	57	70	62	56	65	58	53	60	55	51	45		
2	81	73	67	78	71	65	72	67	62	67	62	58	52		
2.5	87	80	74	83	77	72	77	72	68	72	68	64	57		
3	91	84	79	87	82	77	81	76	72	75	71	68	61		
4	96	91	86	92	88	83	85	82	78	79	76	73	66		
5	99	95	91	95	91	88	88	85	82	82	79	77	69		

A-A'

B-B'

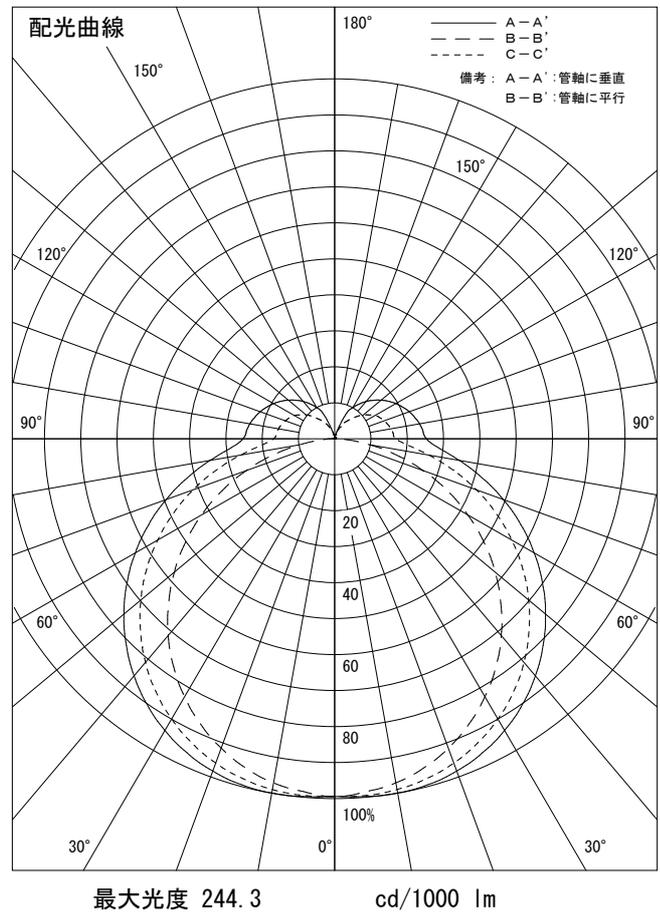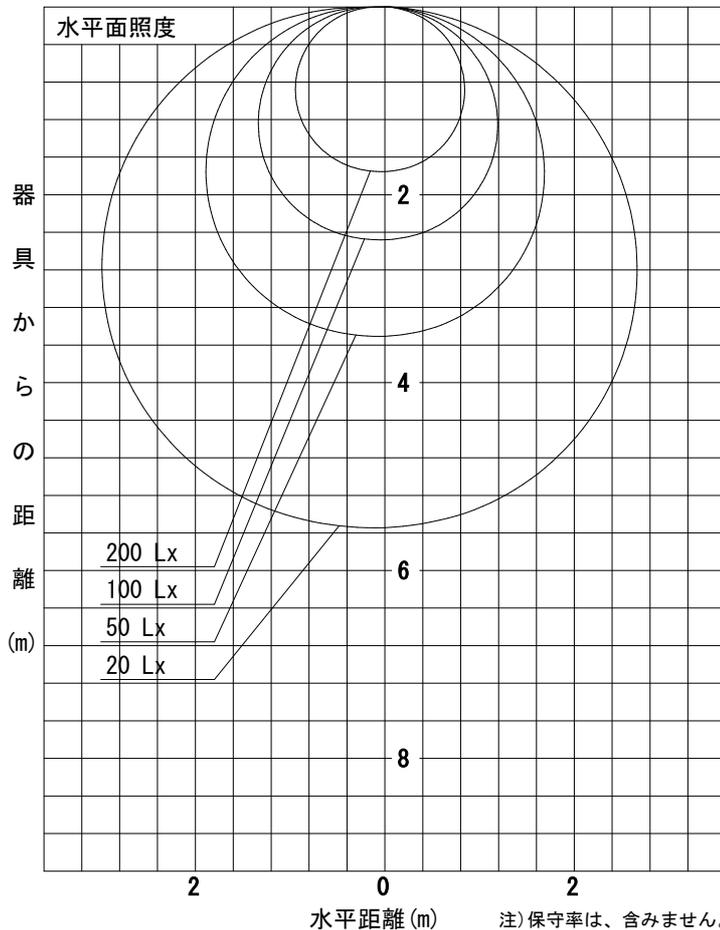

注) 保守率は、含みません。