




品 番	DBL-5502NBG
光 源	LED 24.9W 4000K
定格光束	3510 lm
1/2照度角	A-A' 70° B-B' 64°
ビーム角	A-A' 136° B-B' 106°

器具効率	100.0 %
上方光束	15.5 %
下方光束	84.5 %
器具間隔 最大限 (取付高さH)	A 1.40 H B 1.24 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		42	34	28	41	33	27	38	31	26	36	30	25	22
0.8		51	43	36	50	41	35	47	39	34	43	37	33	29
1		59	50	44	57	49	43	53	46	41	50	44	39	35
1.25		67	58	51	64	56	50	60	53	48	56	50	45	40
1.5		72	64	57	70	62	56	65	58	53	60	55	51	45
2		81	73	67	78	71	65	72	67	62	67	62	58	52
2.5		87	80	74	83	77	72	77	72	68	72	68	64	57
3		91	84	79	87	82	77	81	76	72	75	71	68	61
4		96	91	86	92	88	83	85	82	78	79	76	73	66
5		99	95	91	95	91	88	88	85	82	82	79	77	69

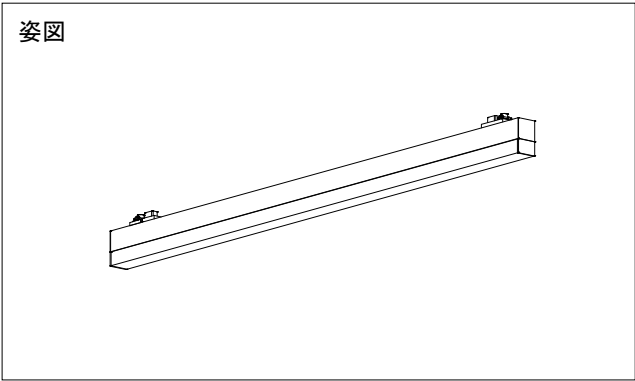