


姿図

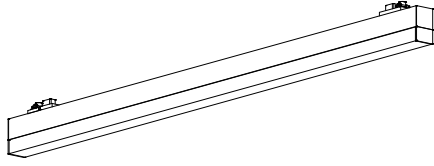



品番	DBL-5502YBG
光源	LED 24.9W 3000K
定格光束	3370 lm
1/2照度角	A-A' 70° B-B' 64°
ビーム角	A-A' 136° B-B' 106°

器具効率	100.0 %
上方光束	15.5 %
下方光束	84.5 %
器具間隔 最大限 (取付高さH)	A 1.40 H
	B 1.24 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)			
	80	70	50	30	10	50	30	10	50	30	10	50	30
室指数	42	34	28	41	33	27	38	31	26	36	30	25	22
0.6	42	34	28	41	33	27	38	31	26	36	30	25	22
0.8	51	43	36	50	41	35	47	39	34	43	37	33	29
1	59	50	44	57	49	43	53	46	41	50	44	39	35
1.25	67	58	51	64	56	50	60	53	48	56	50	45	40
1.5	72	64	57	70	62	56	65	58	53	60	55	51	45
2	81	73	67	78	71	65	72	67	62	67	62	58	52
2.5	87	80	74	83	77	72	77	72	68	72	68	64	57
3	91	84	79	87	82	77	81	76	72	75	71	68	61
4	96	91	86	92	88	83	85	82	78	79	76	73	66
5	99	95	91	95	91	88	88	85	82	82	79	77	69

A-A'

B-B'

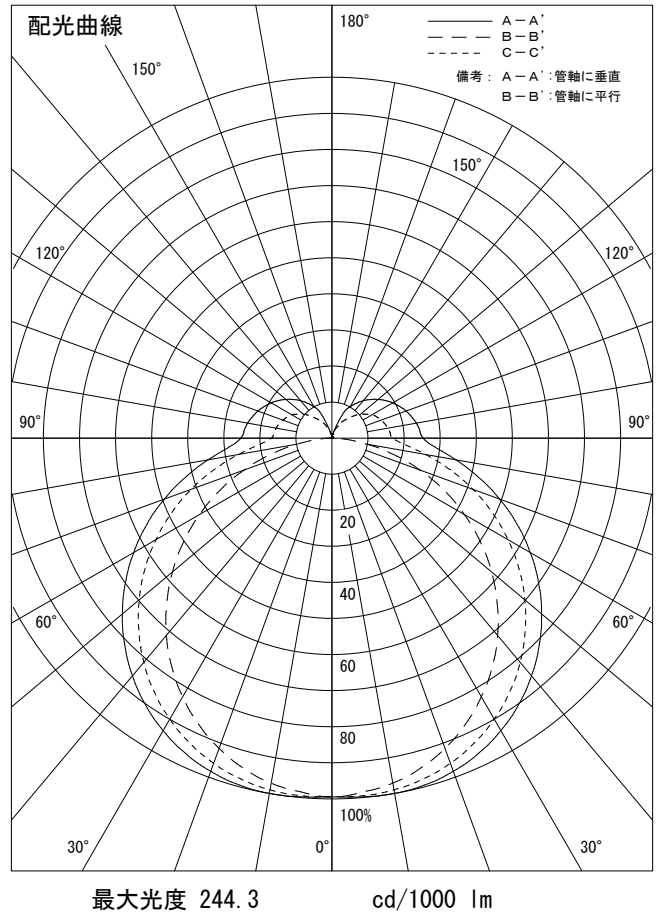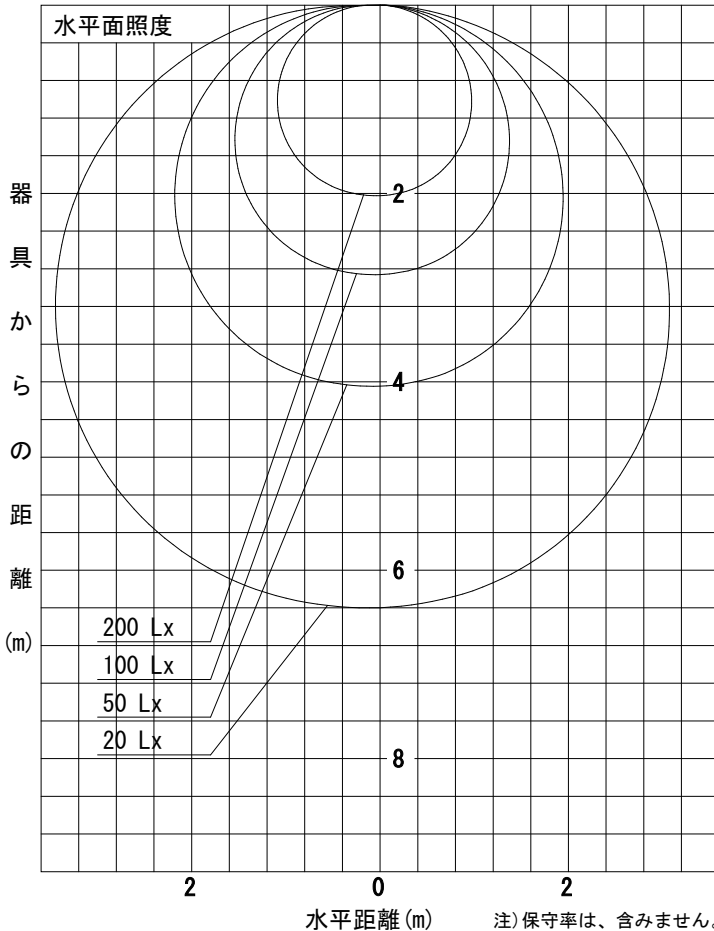

注) 保守率は、含みません。