


姿図

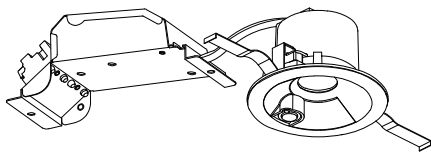

品番	DDL-5563AW	
光源	LED 7.8W 3500K	
定格光束	580	lm
1/2照度角	45°	
ビーム角	52°	

器具効率	100.0 %	
上方光束	0.0 %	
下方光束	100.0 %	
器具間隔 最大限 (取付高さH)	A	0.83 H
	B	0.83 H
保 守 率	良	0.67
	中	0.63
	否	0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	74	68	65	73	68	65	72	68	64	71	67	64	63	
0.8	81	76	72	81	75	72	79	75	71	78	74	71	69	
1	88	83	79	87	82	78	85	81	78	84	80	77	75	
1.25	93	88	84	92	88	84	90	86	83	88	85	82	80	
1.5	97	93	89	96	92	88	93	90	87	91	88	86	83	
2	103	99	96	101	98	95	99	96	93	96	94	92	89	
2.5	107	103	101	105	102	100	102	99	97	99	97	95	92	
3	109	107	104	107	105	103	104	102	100	101	99	98	94	
4	112	110	108	110	108	106	106	105	103	103	102	101	96	
5	114	112	110	111	110	108	108	106	105	104	103	102	98	

