


姿図

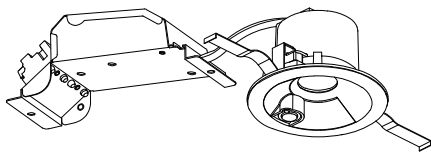

品番	DDL-5562WS	
光源	LED 5.4W 5000K	
定格光束	330	lm
1/2照度角	45°	
ビーム角	52°	

器具効率	100.0 %	
上方光束	0.0 %	
下方光束	100.0 %	
器具間隔 最大限 (取付高さH)	A	0.83 H
	B	0.83 H
保 守 率	良	0.67
	中	0.63
	否	0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	73	68	64	73	68	64	72	67	64	71	67	63	62	
0.8	81	75	71	80	75	71	79	74	70	77	73	70	68	
1	87	82	78	86	81	78	85	80	77	83	79	76	74	
1.25	93	88	84	92	87	83	89	85	82	88	84	81	79	
1.5	97	92	88	95	91	88	93	89	86	91	88	85	83	
2	103	99	95	101	97	94	98	95	93	96	93	91	88	
2.5	106	103	100	105	102	99	101	99	97	99	97	95	91	
3	109	106	104	107	105	102	104	102	100	101	99	98	94	
4	112	109	107	110	108	106	106	104	103	103	101	100	96	
5	113	112	110	111	110	108	107	106	105	104	103	102	97	

