




姿図

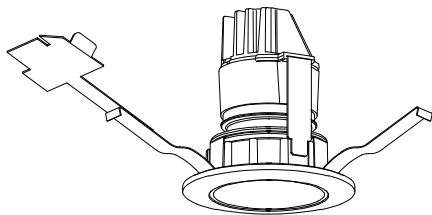


品 番	LLD-7058NUW
光 源	LED 14.5W 4000K
定格光束	750.0 lm
1/2照度角	33 °
ビーム角	34 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H B 0.59 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (×0.01)												
0.6		84	79	76	83	79	76	82	78	76	81	78	76	74
0.8		89	84	81	88	84	81	87	83	80	86	82	80	78
1		94	90	87	93	89	86	92	88	86	90	87	85	83
1.25		98	94	91	97	93	91	95	92	90	93	91	89	86
1.5		101	97	94	100	97	94	98	95	93	96	93	91	89
2		106	103	100	105	102	99	102	100	98	99	98	96	93
2.5		109	107	105	108	105	103	105	103	101	102	100	99	96
3		112	110	108	110	108	106	107	105	104	104	103	102	98
4		114	112	111	112	111	109	108	107	106	105	104	104	99
5		116	114	113	113	112	111	110	109	108	106	105	105	100

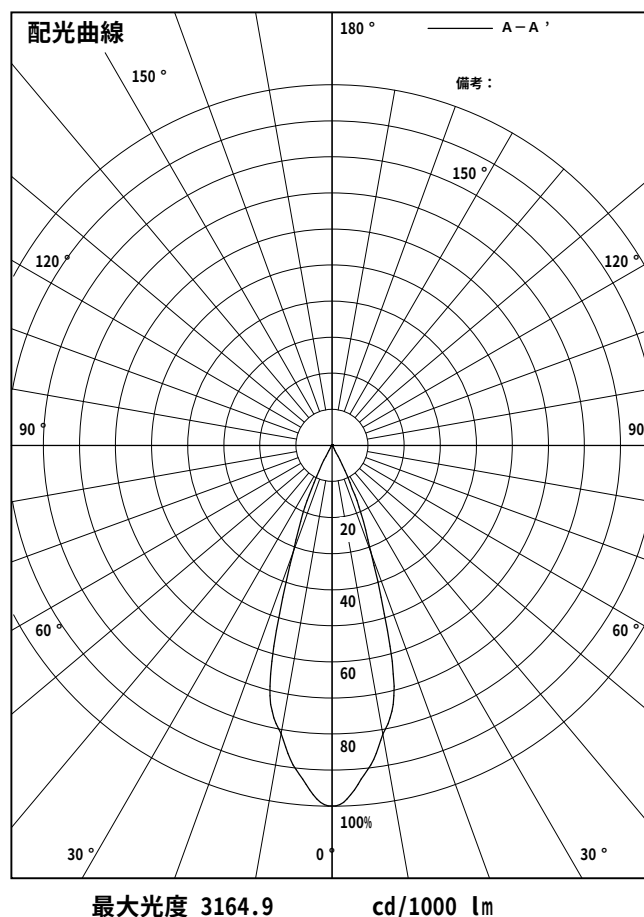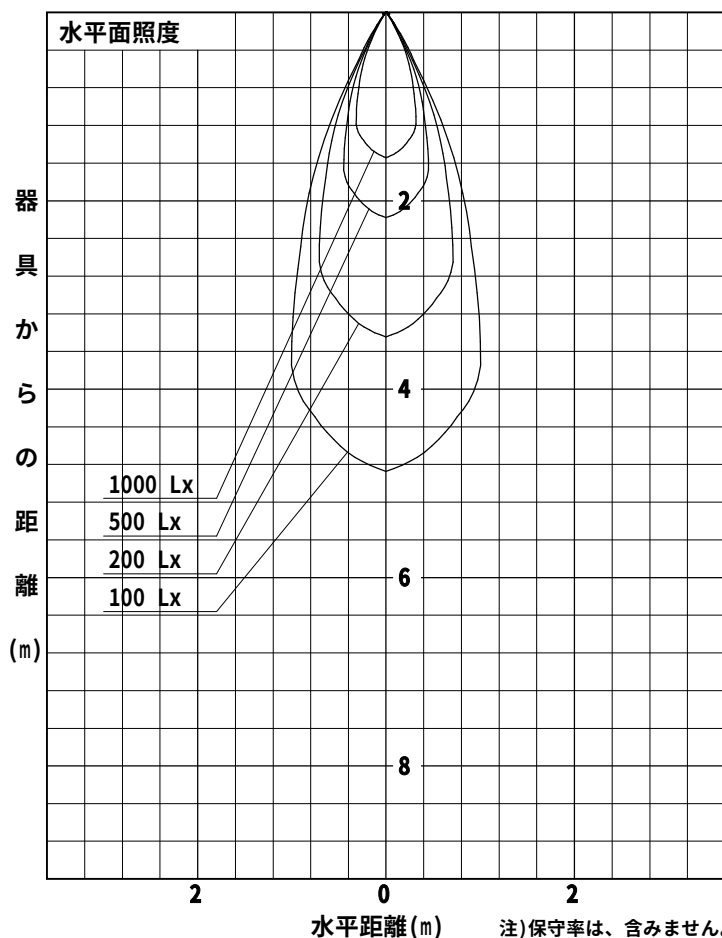

姿図

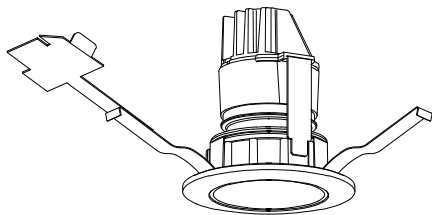

品 番	LLD-7058NUW+省エネ電源
光 源	LED 12.5W 4000K
定格光束	650.0 lm
1/2照度角	33 °
ビーム角	34 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H B 0.59 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (×0.01)												
0.6		84	79	76	83	79	76	82	78	76	81	78	76	74
0.8		89	84	81	88	84	81	87	83	80	86	82	80	78
1		94	90	87	93	89	86	92	88	86	90	87	85	83
1.25		98	94	91	97	93	91	95	92	90	93	91	89	86
1.5		101	97	94	100	97	94	98	95	93	96	93	91	89
2		106	103	100	105	102	99	102	100	98	99	98	96	93
2.5		109	107	105	108	105	103	105	103	101	102	100	99	96
3		112	110	108	110	108	106	107	105	104	104	103	102	98
4		114	112	111	112	111	109	108	107	106	105	104	104	99
5		115	114	113	113	112	111	110	109	108	106	105	105	100

