



姿図



品番	LZD-93566AWN+LZA-93008
光源	LED 31W 3500K
定格光束	1840 lm
1/2照度角	11°
ビーム角	11°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.19 H B 0.19 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
室指数	照 明 率 (× 0.01)														
0.6	85	80	77	84	80	77	84	80	77	83	79	77	75		
0.8	90	86	82	90	85	82	88	85	82	87	84	81	80		
1	96	91	88	95	91	88	93	90	87	92	89	86	84		
1.25	100	96	93	99	95	92	97	94	91	95	92	90	88		
1.5	103	99	96	102	98	95	100	97	94	97	95	93	90		
2	108	105	102	107	104	101	104	101	99	101	99	98	95		
2.5	111	109	106	110	107	105	107	105	103	104	102	101	97		
3	114	112	110	112	110	108	109	107	106	106	104	103	100		
4	116	115	113	114	113	112	111	109	108	107	106	106	101		
5	118	117	115	116	115	114	112	111	110	108	107	107	102		

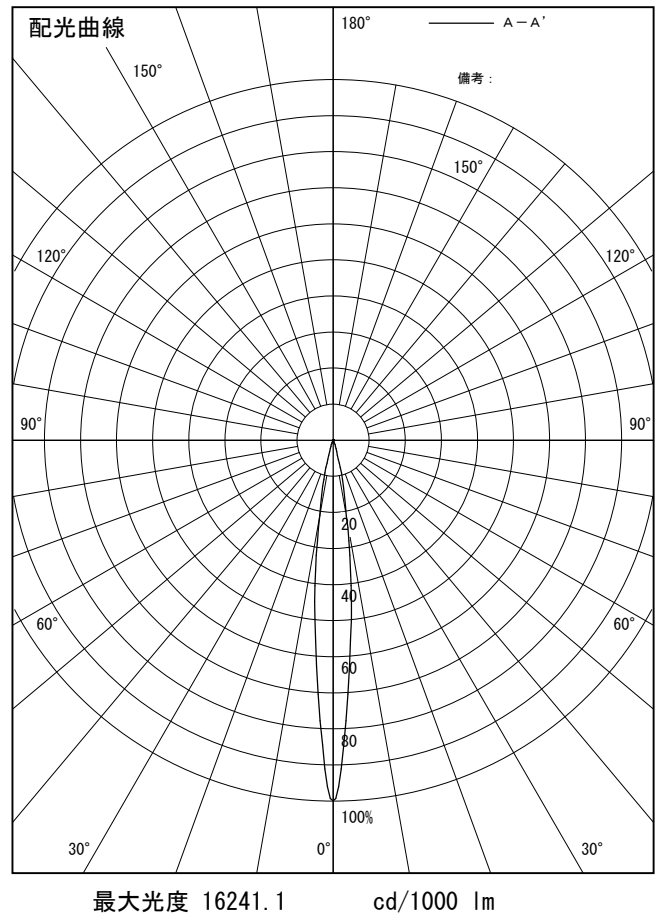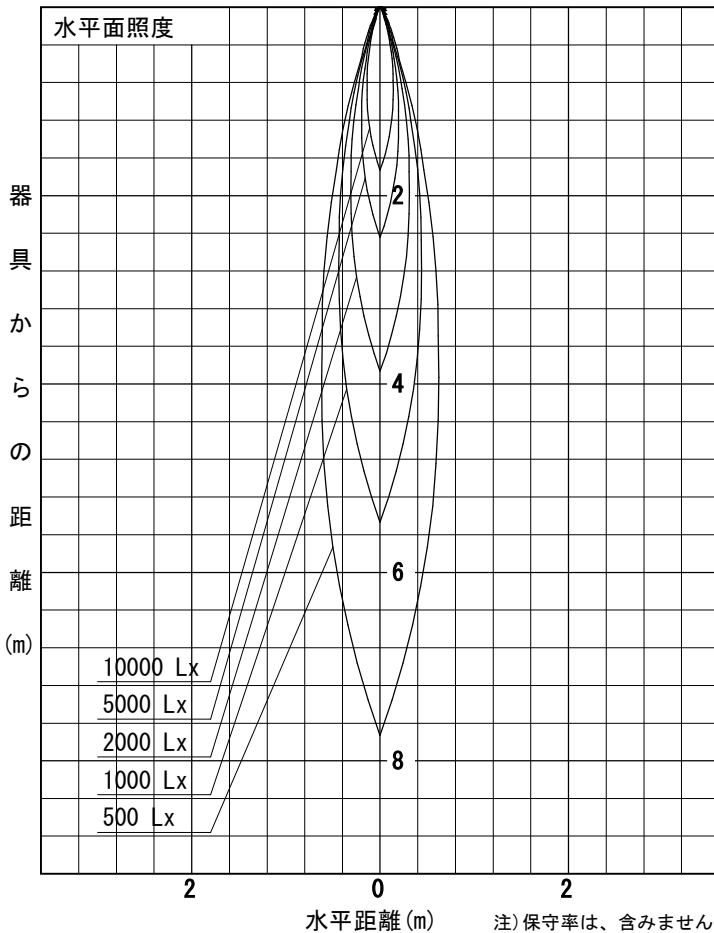

注)保守率は、含みません。