
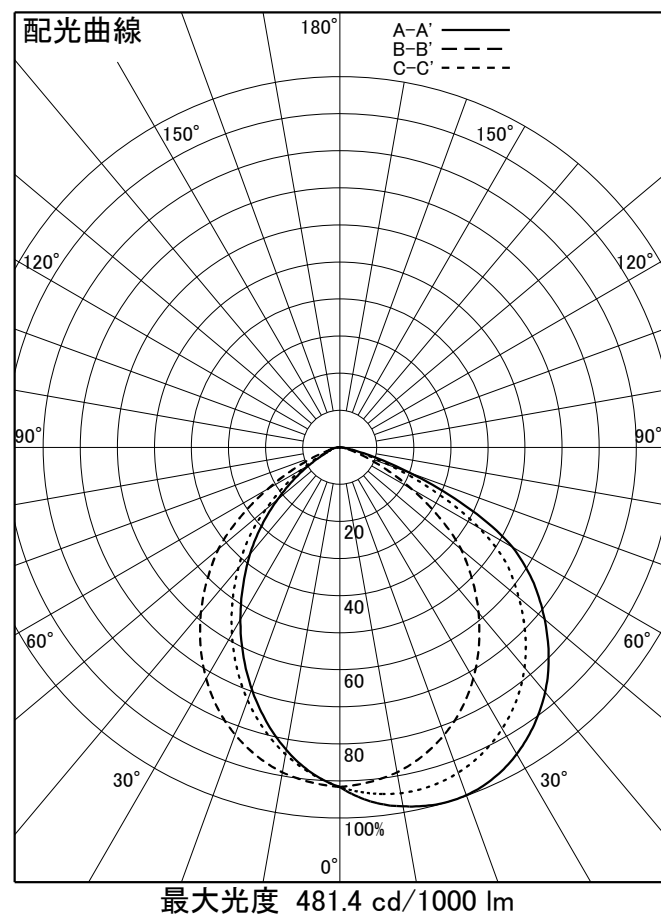


品番	DDL-6121WW
光源	LED 4.6W 5000K
定格光束	440 lm
1/2照度角	( A 25° A' 37° ) B-B' 61°
1/2ビーム角	( A 35° A' 62° ) B-B' 96°

器具効率	100.0 %	
上方光束	0.0 %	
下方光束	100.0 %	
器具間隔 最大限 (取付高さH)	A	***
	B	1.18H
保守率	良	0.67
	中	0.63
	否	0.56

反射率(%)	天井	80								70								50								30								20		0
		壁		50		30		10		70		50		30		10		70		50		30		10		10	0									
室指数		30		10		30		10		30		10		30		10		30		10		30		10		10	0									
		照 明 率 ( × 0.01 )																																		
0.6		67	62	53	51	45	44	39	39	65	61	53	50	45	43	39	39	62	59	51	49	44	43	39	39	60	57	50	48	43	43	39	38	38	37	
0.8		78	71	65	61	56	54	50	48	76	70	64	60	55	53	49	48	72	67	62	59	54	53	49	48	69	65	60	58	53	52	48	48	48	46	
1		87	78	74	69	65	62	59	57	84	77	73	68	64	61	58	56	80	74	70	66	63	61	57	56	76	72	68	65	61	60	57	56	56	54	
1.25		95	84	83	76	74	69	68	64	92	83	81	75	73	69	67	64	87	80	78	73	71	68	66	64	82	77	75	72	69	67	65	63	63	61	
1.5		100	88	89	81	81	75	74	70	97	87	87	80	79	74	74	70	91	84	83	78	77	73	72	69	87	81	80	76	75	72	70	69	69	67	
2		108	94	98	88	91	83	85	79	104	92	96	87	89	82	84	79	98	90	91	85	86	81	82	78	93	87	87	83	83	80	79	77	77	75	
2.5		112	97	104	92	98	88	92	85	109	96	102	91	96	87	91	84	102	93	97	89	92	86	88	83	96	91	92	87	88	85	85	82	82	80	
3		116	99	109	95	103	92	98	89	112	98	106	94	100	91	96	88	105	95	100	92	96	89	92	87	99	93	95	90	92	88	89	86	85	83	
4		120	102	114	99	109	96	105	93	115	100	110	97	106	95	102	92	108	98	104	95	101	93	98	91	102	96	99	93	96	92	94	90	89	87	
5		122	103	117	101	113	98	109	96	118	102	113	99	110	97	106	95	110	99	107	97	104	95	101	94	103	97	101	95	99	94	97	92	92	90	
7		125	105	122	103	119	102	116	100	121	104	118	102	115	101	112	99	113	102	110	100	108	99	106	98	106	99	104	98	103	97	101	96	95	94	
10		127	106	125	105	123	104	120	103	123	105	121	104	119	103	117	102	114	103	113	102	111	101	110	100	107	101	106	100	105	99	104	99	98	96	

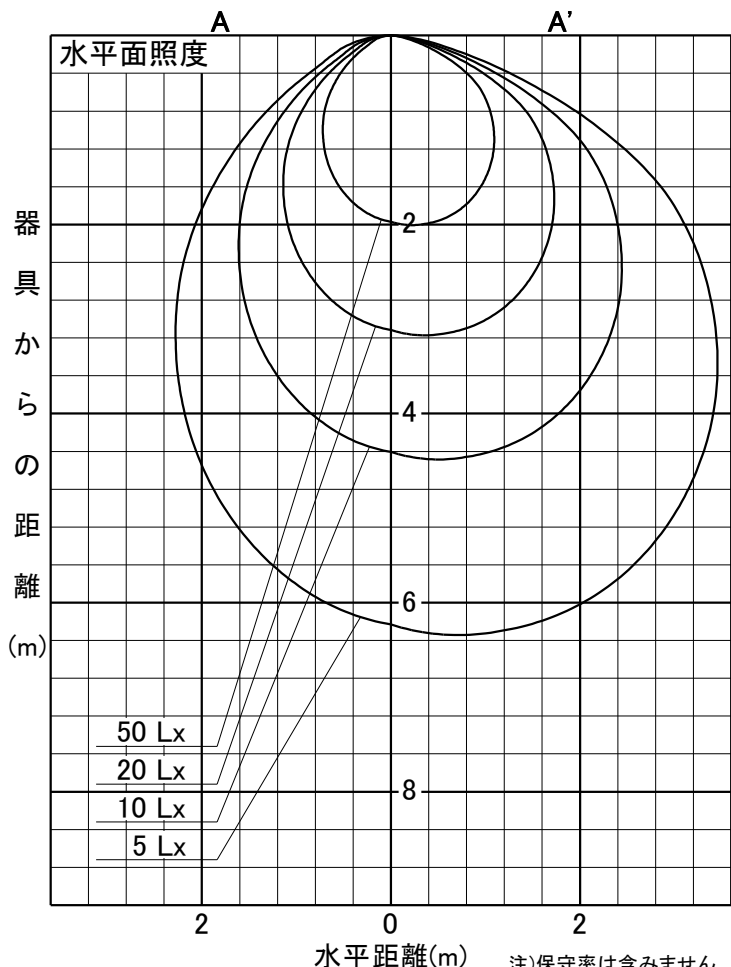

注)保守率は含みません。