

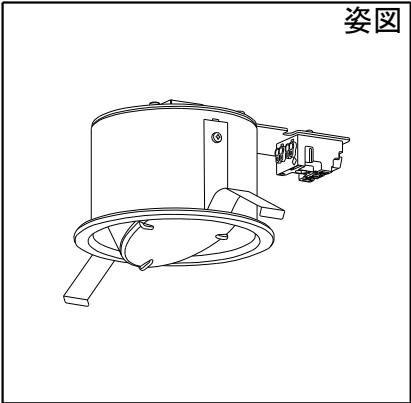


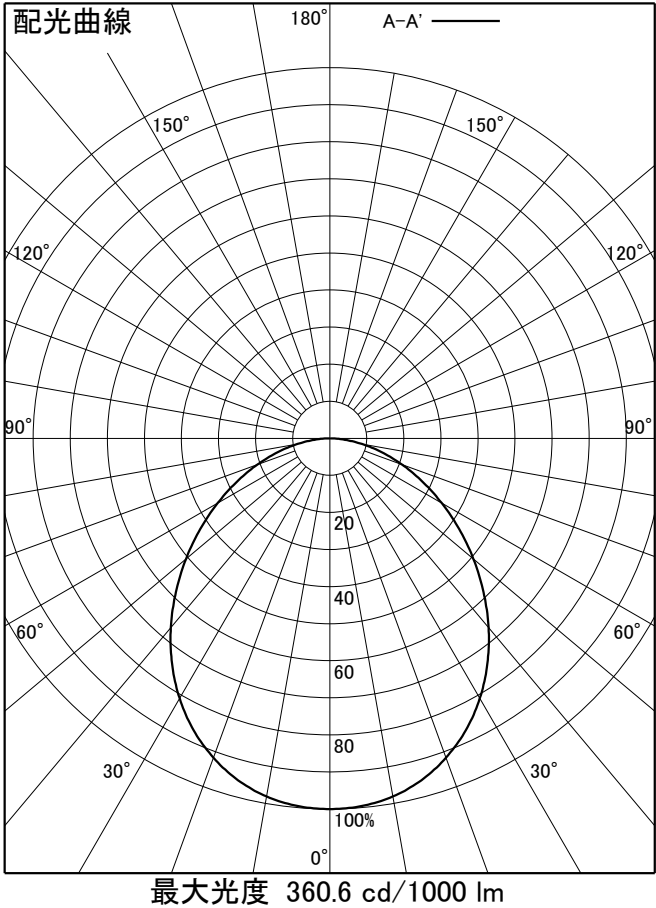

品 番	DDL-5629WWG
光 源	LDF7N-H-GX53/D/V<DAIKO>
ランプ光束	800 lm
1/2照度角	62°
1/2ビーム角	101°

器具効率	91.3 %
上方光束	0.0 %
下方光束	91.3 %
器具間隔 最大限 (取付高さH)	A 1.21H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	59	55	46	44	38	37	33	33	58	54	46	44	38	37	33	33	55	51	44	43	38	37	33	32	52	50	43	42	37	36	33	32	32	31			
0.8	69	63	56	53	48	46	42	41	67	62	55	52	47	45	42	41	63	59	53	51	46	45	41	40	60	57	52	50	45	44	41	40	40	38			
1	77	69	64	60	56	53	49	48	74	68	63	59	55	52	49	48	70	65	61	57	54	52	48	47	66	63	58	56	52	51	48	47	47	45			
1.25	84	74	72	66	64	60	57	55	81	73	70	65	63	59	57	54	76	70	67	63	61	58	56	54	72	68	65	62	59	57	55	54	53	52			
1.5	89	78	78	71	70	65	63	60	86	77	76	70	69	64	63	60	81	74	73	68	66	63	61	59	76	72	70	66	64	62	60	59	58	57			
2	96	83	87	77	79	72	73	68	93	82	84	76	78	72	72	68	87	79	80	75	75	70	70	67	82	77	77	73	72	69	68	66	66	64			
2.5	101	87	92	82	86	77	80	73	97	85	90	81	84	77	79	73	91	83	85	79	80	75	76	72	86	80	81	77	77	74	74	71	71	69			
3	104	89	97	85	91	81	86	77	100	88	94	84	89	80	84	77	94	85	89	82	85	79	81	76	88	83	84	80	81	77	78	75	75	73			
4	108	92	102	88	97	85	93	82	104	90	99	87	94	84	90	82	97	88	93	85	90	83	86	81	91	86	88	83	85	81	83	79	79	77			
5	110	93	105	90	101	88	97	85	106	92	102	89	98	87	95	85	99	90	96	87	93	85	90	83	93	87	90	85	88	84	86	82	82	80			
7	113	95	110	93	107	92	104	90	109	94	106	92	103	91	101	89	102	92	100	90	97	89	95	88	96	90	94	88	92	87	91	86	85	84			
10	116	97	113	95	111	94	109	93	111	96	109	94	107	93	105	92	104	93	102	92	101	91	99	90	97	91	96	90	95	90	94	89	88	86			

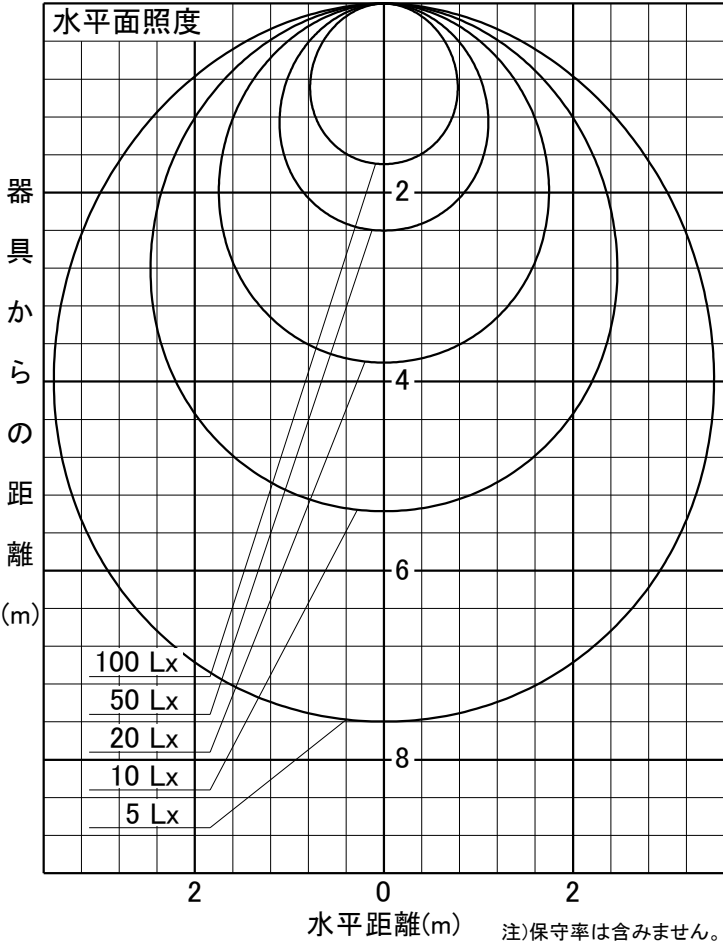

注)保守率は含みません。