

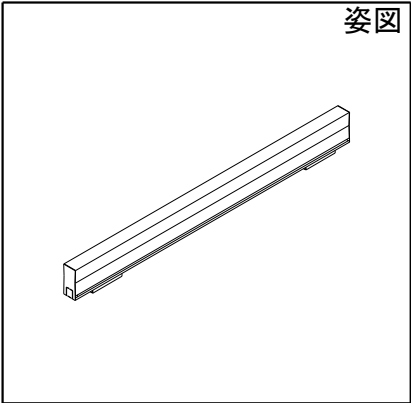


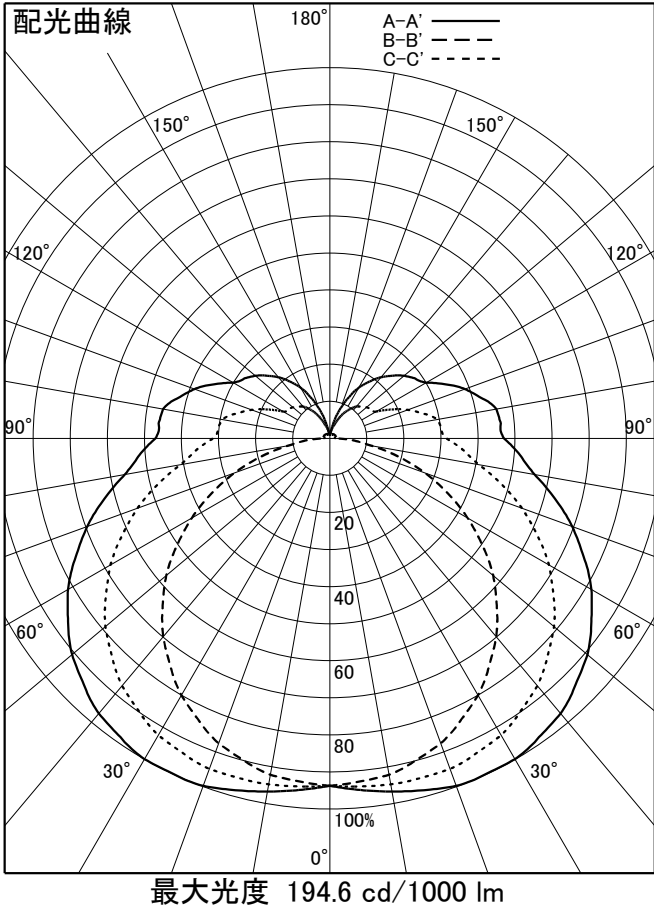

品 番	DBL-5591AWG
光 源	LED 7.5W 3500K
定格光束	920 lm
1/2照度角	A-A' 77° B-B' 65°
1/2ビーム角	A-A' 182° B-B' 115°

器具効率	100.0 %
上方光束	20.9 %
下方光束	79.1 %
器具間隔 最大限 (取付高さH)	A 1.59H B 1.27H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	55	51	40	38	31	30	25	24	52	48	38	37	30	29	24	24	47	44	35	34	28	27	23	22	42	40	32	31	26	25	21	21	21	18			
0.8	65	59	50	47	40	38	33	32	61	56	48	45	38	37	32	31	55	51	43	41	36	35	30	29	49	46	40	38	33	32	28	28	27	24			
1	73	66	58	54	48	45	40	39	69	62	55	52	46	44	39	38	61	57	50	48	42	41	36	36	54	51	46	44	39	38	34	33	32	29			
1.25	80	71	66	60	56	52	48	46	76	68	63	58	53	50	46	44	67	62	57	54	49	47	43	42	60	56	51	49	45	44	40	39	38	34			
1.5	86	76	72	66	62	58	54	51	81	72	69	63	60	56	52	50	72	66	62	58	55	52	49	47	63	60	56	53	50	48	45	44	43	38			
2	94	82	82	73	72	66	65	60	88	78	78	70	69	64	62	58	78	71	70	65	63	59	57	55	69	65	63	60	57	55	53	51	50	45			
2.5	99	86	88	78	80	72	72	66	93	82	84	75	76	69	69	64	82	75	75	69	69	65	64	60	73	69	67	64	63	60	58	57	55	50			
3	103	88	93	82	85	76	78	71	97	85	88	79	81	73	75	69	86	78	79	73	73	68	69	65	76	71	71	67	67	64	63	60	58	53			
4	108	92	100	86	93	81	87	77	101	88	94	83	88	79	83	75	90	81	84	77	79	73	75	70	79	75	75	71	72	68	68	66	63	58			
5	111	94	104	89	98	85	92	81	104	90	98	86	93	82	88	79	92	83	88	80	83	77	80	74	82	77	78	74	75	71	72	69	67	61			
7	115	97	110	93	105	90	100	87	108	93	103	90	99	87	95	84	96	86	92	84	89	81	86	79	85	80	82	78	80	76	78	74	71	66			
10	118	99	114	96	110	94	107	92	111	95	108	93	104	91	101	89	98	88	96	87	93	85	91	83	87	82	85	80	84	79	82	78	75	69			

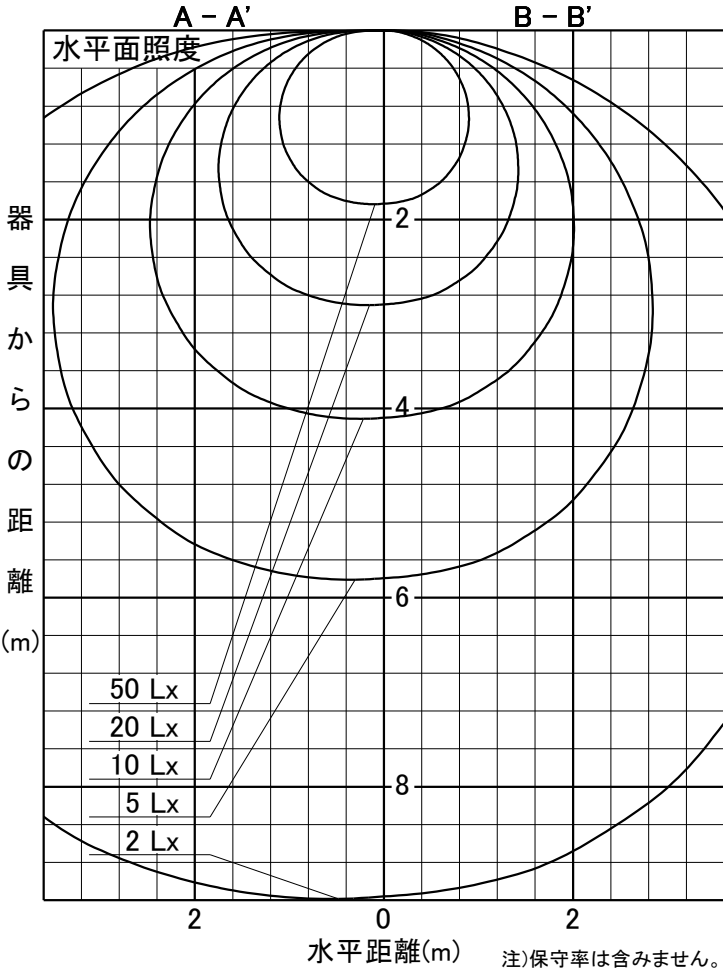

注)保守率は含みません。