
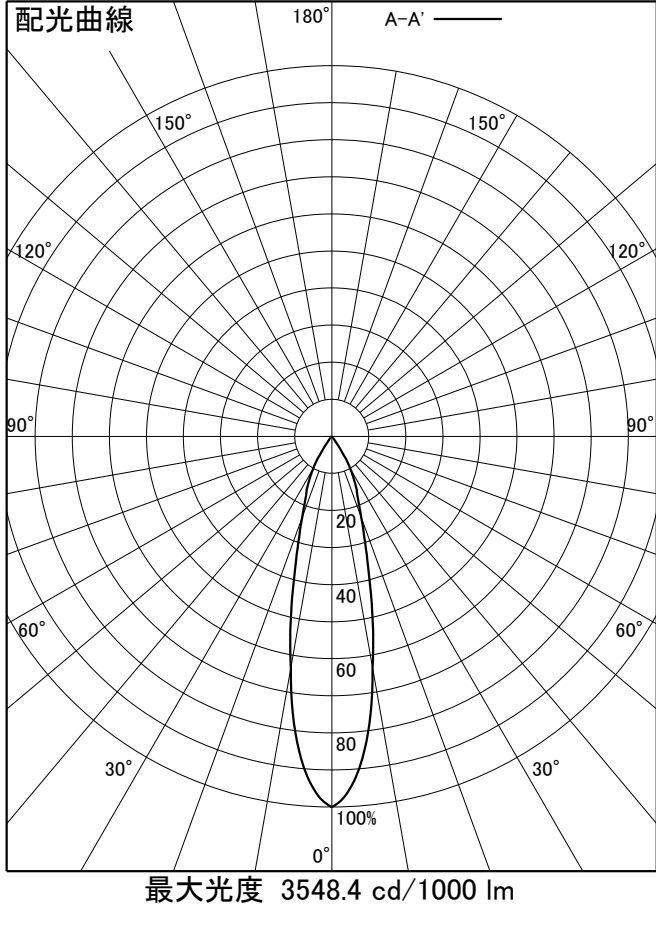


品番	DDL-5632YWG
光源	LED7.8W 2700K
定格光束	500 lm
1/2照度角	24°
1/2ビーム角	25°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.43H
保守率	良 0.67
	中 0.63
	否 0.56

反射率(%)	天井 壁 床	80								70								50								30								20		0
		70		50		30		10		70		50		30		10		70		50		30		10		70	30	10	0							
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数		照明率 (×0.01)																																		
0.6		95	87	86	82	81	79	77	76	94	87	86	82	81	78	77	76	91	86	84	81	80	78	77	76	89	84	83	81	79	78	76	76	76	75	
0.8		101	92	92	87	87	83	83	81	99	91	91	86	86	83	82	81	96	90	90	85	85	82	82	80	93	88	88	85	84	82	81	80	80	79	
1		107	96	98	91	93	88	89	86	104	95	97	91	92	88	88	85	101	93	95	90	90	87	87	85	97	92	92	89	89	87	86	85	84	83	
1.25		111	98	103	95	98	92	94	89	108	98	102	94	97	91	93	89	104	96	99	93	95	91	91	89	100	94	96	92	93	90	90	88	88	87	
1.5		114	100	107	97	102	94	98	92	111	100	105	96	100	94	97	92	106	98	102	95	98	93	95	91	102	96	98	94	95	92	93	91	90	89	
2		119	103	113	101	108	99	105	97	116	102	111	100	107	98	103	97	110	101	106	99	103	97	100	96	105	99	102	97	100	96	98	95	95	93	
2.5		122	105	117	103	113	102	110	101	119	104	114	103	111	101	108	100	113	103	109	101	107	100	105	99	107	101	105	100	103	99	101	98	97	96	
3		124	107	120	105	117	104	114	103	121	106	117	104	114	103	112	103	114	104	112	103	110	102	108	101	109	102	107	101	105	101	104	100	100	98	
4		127	108	124	107	121	106	118	105	123	107	120	106	118	105	116	105	116	105	114	104	112	104	111	103	110	103	109	103	107	102	106	102	101	100	
5		128	108	126	108	123	107	122	107	124	107	122	107	120	107	119	106	117	106	115	105	114	105	113	105	111	104	110	104	109	103	108	103	102	101	
7		130	110	129	109	127	109	126	109	126	109	125	109	124	109	123	109	118	107	118	107	117	107	116	107	112	105	111	105	111	105	110	105	104	103	
10		131	110	131	110	130	110	129	111	127	109	126	109	126	109	125	110	119	107	119	107	118	108	118	108	112	105	112	106	112	106	112	106	105	103	

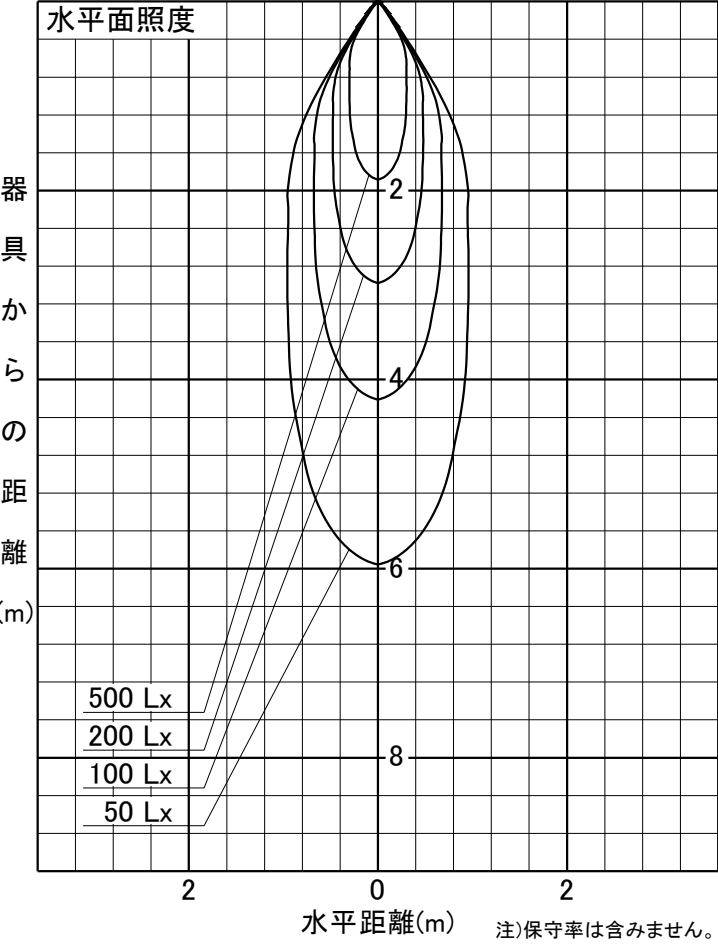

注)保守率は含みません。