

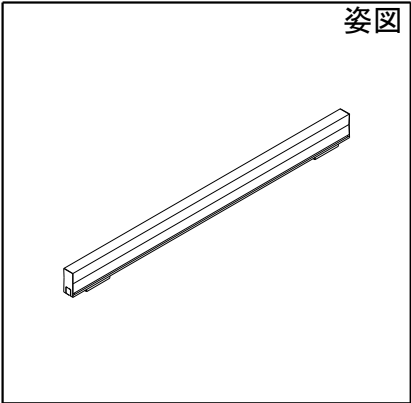


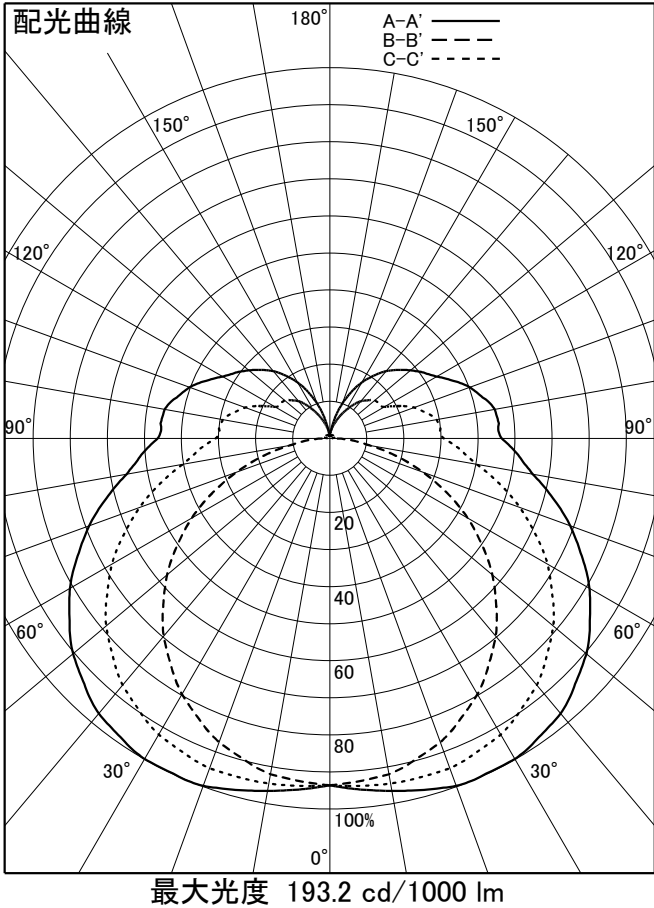

品 番	DBL-5592NWG
光 源	LED 11W 4000K
定格光束	1420 lm
1/2照度角	A-A' 77° B-B' 65°
1/2ビーム角	A-A' 179° B-B' 115°

器具効率	100.0 %
上方光束	22.0 %
下方光束	78.0 %
器具間隔 最大限 (取付高さH)	A 1.59H B 1.26H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	55	51	40	38	31	30	25	24	52	48	38	37	30	29	24	24	46	44	35	34	28	27	23	22	42	39	32	31	26	25	21	21	20	18			
0.8	65	59	50	47	40	38	33	32	61	56	47	45	38	37	32	31	54	51	43	41	36	34	30	29	48	46	39	38	33	32	28	28	27	23			
1	73	66	58	54	48	45	40	39	69	62	55	52	46	44	39	38	61	56	50	47	42	41	36	35	54	51	45	43	39	38	34	33	32	28			
1.25	80	71	66	60	56	52	48	46	75	68	63	58	53	50	46	44	67	62	57	53	49	47	43	42	59	56	51	49	45	44	40	39	38	34			
1.5	86	76	72	66	62	58	54	51	81	72	69	63	59	56	52	50	71	65	62	58	54	52	48	47	63	59	56	53	50	48	45	44	42	38			
2	94	82	82	73	72	66	65	60	88	78	77	70	69	64	62	58	78	71	69	65	63	59	57	55	69	65	62	59	57	55	53	51	49	45			
2.5	99	85	88	78	80	72	72	66	93	82	84	75	76	69	69	64	82	75	75	69	69	64	63	60	73	68	67	64	62	60	58	56	54	49			
3	103	88	93	82	85	76	78	71	96	84	88	78	81	73	75	69	85	77	79	72	73	68	68	64	75	71	70	67	66	63	62	60	58	53			
4	108	92	100	86	93	81	87	77	101	88	94	83	88	79	82	75	89	81	84	77	79	73	75	70	79	74	75	71	71	68	68	65	63	57			
5	111	94	104	89	98	85	92	81	104	90	98	86	93	82	88	79	92	83	87	79	83	76	79	73	81	76	78	73	75	71	72	68	66	61			
7	115	97	110	93	105	90	100	87	108	93	103	90	99	87	95	84	95	86	92	83	89	81	86	79	84	79	82	77	79	75	77	73	71	65			
10	118	99	114	96	110	94	107	91	111	95	107	93	104	91	101	88	98	88	95	86	93	84	91	83	87	81	85	80	83	78	81	77	74	68			

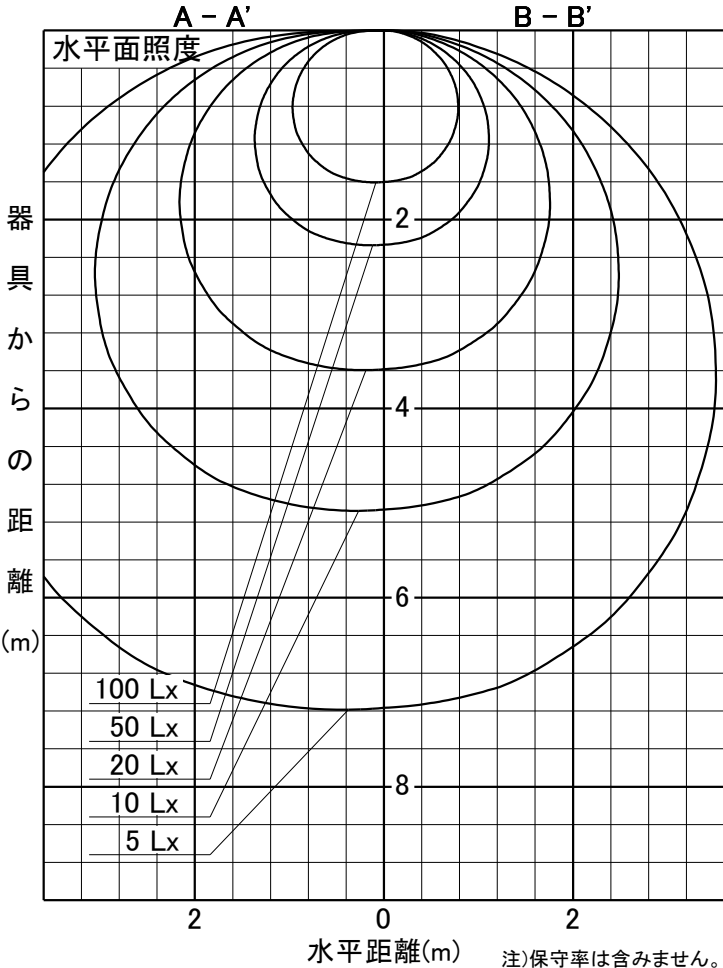

注)保守率は含みません。