



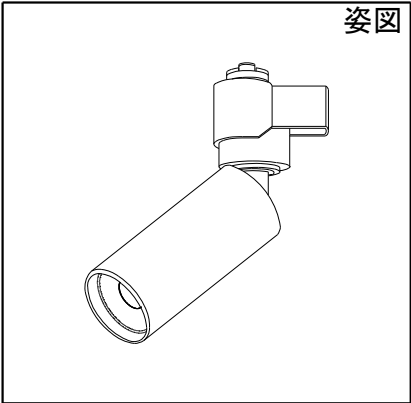

品 番	DSL-5609YWG
光 源	LDR4L-W-E11/D/V <DAIKO>
ランプ光束	450 lm
1/2照度角	27°
1/2ビーム角	29°

器具効率	93.9 %
上方光束	0.0 %
下方光束	93.9 %
器具間隔 最大限 (取付高さH)	A 0.48H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0	
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照 明 率																																(× 0.01)			
0.6	82	75	72	69	66	65	63	62	80	75	72	68	66	64	62	62	78	73	70	68	65	64	62	61	76	72	69	67	65	64	62	61	61	60		
0.8	89	81	80	75	74	71	69	68	87	80	79	74	73	70	69	67	84	78	77	74	72	70	68	67	81	77	75	73	71	69	68	67	67	66		
1	95	86	86	80	80	76	76	73	93	85	85	80	80	76	75	73	89	83	83	79	78	75	75	73	86	81	81	78	77	75	74	72	72	71		
1.25	100	89	92	84	86	81	82	78	98	88	91	84	85	81	81	78	94	86	88	83	83	80	80	77	90	85	85	82	81	79	78	77	77	76		
1.5	104	92	96	87	91	84	87	82	101	91	95	87	90	84	86	81	97	89	91	86	87	83	84	81	92	87	88	84	85	82	82	80	80	79		
2	109	95	103	92	98	89	94	87	106	94	101	91	96	89	93	87	101	92	97	90	93	88	90	86	96	90	93	88	90	87	88	85	85	84		
2.5	112	97	107	95	103	93	99	91	109	96	105	94	101	92	98	90	103	94	100	92	97	91	94	89	98	92	96	91	93	90	91	88	88	87		
3	115	98	110	97	107	95	103	94	111	97	108	96	104	94	101	93	105	96	102	94	100	93	98	92	100	94	98	93	96	92	94	91	90	89		
4	117	100	114	98	111	97	108	96	114	99	111	98	108	96	106	95	107	97	105	96	103	95	101	94	101	95	100	94	98	94	97	93	92	91		
5	119	101	116	100	113	99	111	98	115	100	112	99	110	98	108	97	108	98	106	97	105	96	103	96	102	96	101	95	100	95	99	94	94	92		
7	121	102	119	101	117	101	116	100	117	101	115	100	114	100	113	100	110	99	109	99	108	98	107	98	103	97	103	97	102	97	101	96	96	94		
10	122	102	121	102	120	102	119	102	118	101	117	101	116	101	115	101	111	99	110	99	109	99	109	99	104	98	104	98	103	98	103	97	97	95		

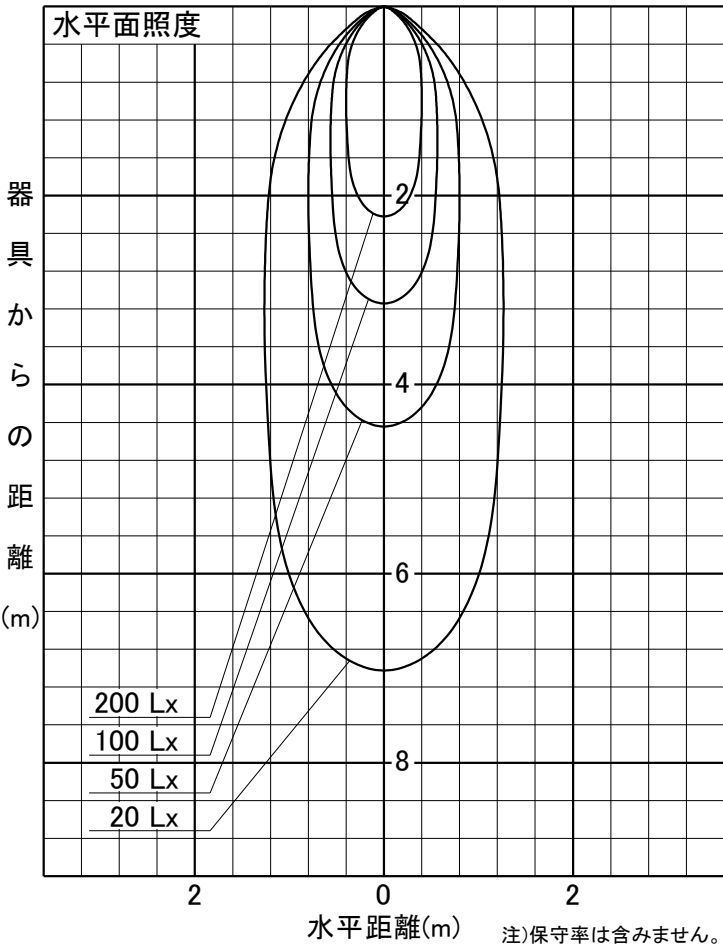

注)保守率は含みません。

