




品 番	DBL-5590NWG
光 源	LED 6W 4000K
定格光束	710 lm
1/2照度角	A-A' 77° B-B' 65°
1/2ビーム角	A-A' 180° B-B' 115°

器具効率	100.0 %
上方光束	20.1 %
下方光束	79.9 %
器具間隔 最大限 (取付高さH)	A 1.59H B 1.27H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																														(× 0.01)			
室指数																																			
0.6	55	51	40	38	31	30	25	24	52	48	38	37	30	29	24	24	47	44	35	34	28	27	23	22	42	40	32	31	26	26	21	21	21	18	
0.8	65	59	50	47	40	38	33	32	62	56	48	45	38	37	32	31	55	51	44	42	36	35	30	30	49	46	40	38	33	32	28	28	27	24	
1	73	66	58	54	48	45	40	39	69	63	55	52	46	44	39	38	61	57	50	48	42	41	36	36	55	52	46	44	39	38	34	34	33	29	
1.25	80	72	66	60	56	52	48	46	76	68	63	58	53	51	46	44	67	62	57	54	49	47	43	42	60	56	52	50	45	44	40	40	38	34	
1.5	86	76	72	66	62	58	54	51	81	72	69	63	60	56	52	50	72	66	62	58	55	52	49	47	64	60	56	54	50	49	45	44	43	39	
2	94	82	82	73	72	66	65	60	88	78	78	70	69	64	62	58	78	72	70	65	63	60	58	55	70	65	63	60	58	56	53	52	50	46	
2.5	99	86	88	78	80	72	72	66	93	82	84	75	76	69	70	64	83	75	75	70	69	65	64	61	74	69	68	64	63	60	59	57	55	50	
3	103	88	93	82	85	76	78	71	97	85	88	79	81	73	75	69	86	78	79	73	74	69	69	65	76	72	71	68	67	64	63	61	59	54	
4	108	92	100	86	93	82	87	77	102	88	94	83	88	79	83	75	90	81	85	77	80	74	75	70	80	75	76	72	72	69	69	66	64	59	
5	111	94	104	89	98	85	92	81	105	90	98	86	93	82	88	79	93	84	88	80	84	77	80	74	82	77	79	74	76	72	73	69	67	62	
7	115	97	110	93	105	90	101	87	108	93	104	90	99	87	96	84	96	87	93	84	89	82	86	79	86	80	83	78	80	76	78	74	72	66	
10	118	99	114	96	111	94	107	92	111	96	108	93	105	91	102	89	99	89	96	87	94	85	91	83	88	83	86	81	84	80	82	78	76	70	

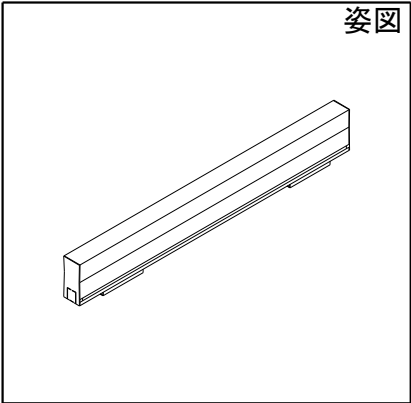