

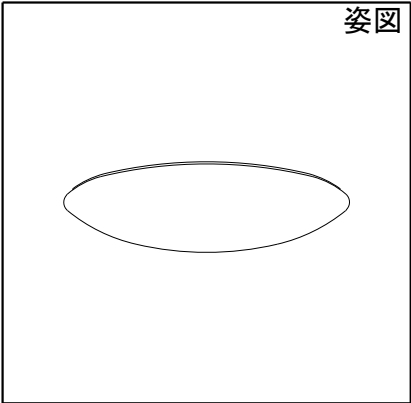


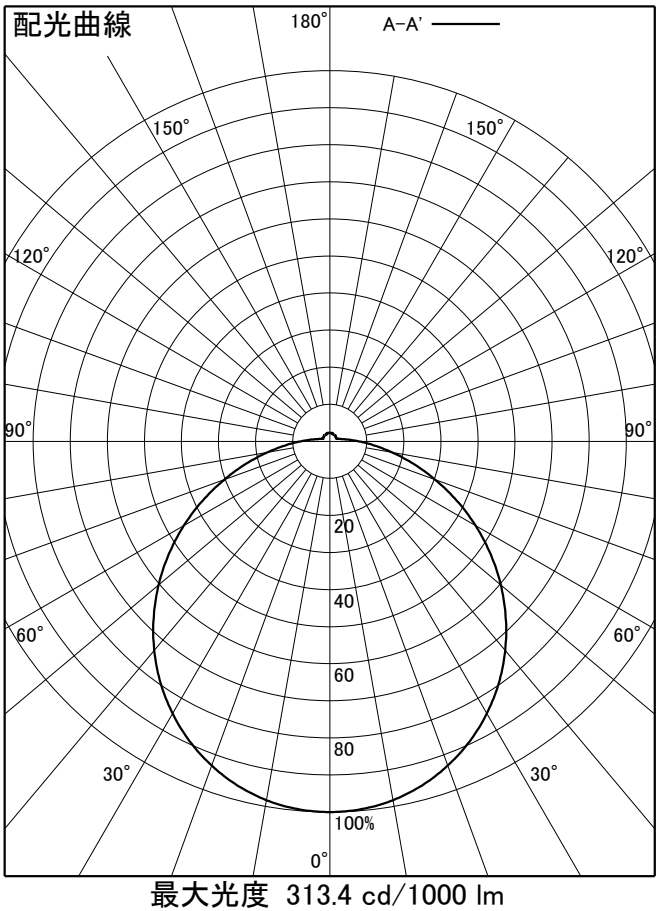

品 番	DCL-41967_4800K
光 源	LED 34W 7800K~2700K
定格光束	4600 lm
1/2照度角	64°
1/2ビーム角	114°

器具効率	100.0 %
上方光束	5.4 %
下方光束	94.6 %
器具間隔 最大限 (取付高さH)	A 1.26H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																																(× 0.01)	
室指数																																			
0.6	61	56	46	44	37	36	31	31	59	55	45	43	37	36	31	31	55	52	43	42	36	35	30	30	52	49	42	40	35	34	30	30	29	27	
0.8	72	65	57	53	47	45	40	39	69	63	55	52	46	45	40	39	64	60	53	50	45	43	39	38	60	57	50	48	43	42	38	38	37	35	
1	80	72	65	61	55	53	48	47	77	70	64	59	54	52	48	46	71	66	60	57	52	51	46	45	66	63	57	55	51	49	45	45	44	42	
1.25	87	78	74	67	64	60	57	54	84	76	72	66	63	59	56	53	78	72	68	64	60	57	54	52	72	68	64	61	58	56	53	52	51	48	
1.5	93	82	80	73	71	66	63	60	89	80	78	71	69	65	62	59	83	76	73	69	66	63	60	58	77	72	69	66	63	61	58	57	56	54	
2	101	88	90	80	81	74	74	69	97	86	87	79	79	73	73	68	89	82	82	76	75	71	70	67	83	78	77	73	71	69	67	65	64	62	
2.5	106	92	96	85	88	80	82	75	102	89	93	83	86	78	80	74	94	86	87	80	81	76	76	72	87	82	82	78	77	74	73	71	70	67	
3	110	94	101	89	94	84	88	79	105	92	98	87	91	82	86	78	97	88	91	84	86	80	81	77	90	85	85	81	81	78	78	75	74	71	
4	114	97	107	93	101	89	96	85	110	95	103	91	98	87	93	84	101	91	96	88	92	85	88	82	93	88	90	85	86	82	83	80	79	76	
5	117	99	111	95	106	92	101	89	112	97	107	94	102	91	98	88	103	93	99	91	96	88	92	85	96	90	93	87	90	85	87	83	82	79	
7	121	102	117	99	112	97	109	94	116	100	112	97	108	95	105	93	107	96	104	94	101	92	98	90	99	93	96	91	94	89	92	88	87	84	
10	124	104	121	102	118	100	115	98	119	102	116	100	113	98	111	97	109	98	107	97	105	95	103	94	101	95	99	94	98	92	96	91	90	87	

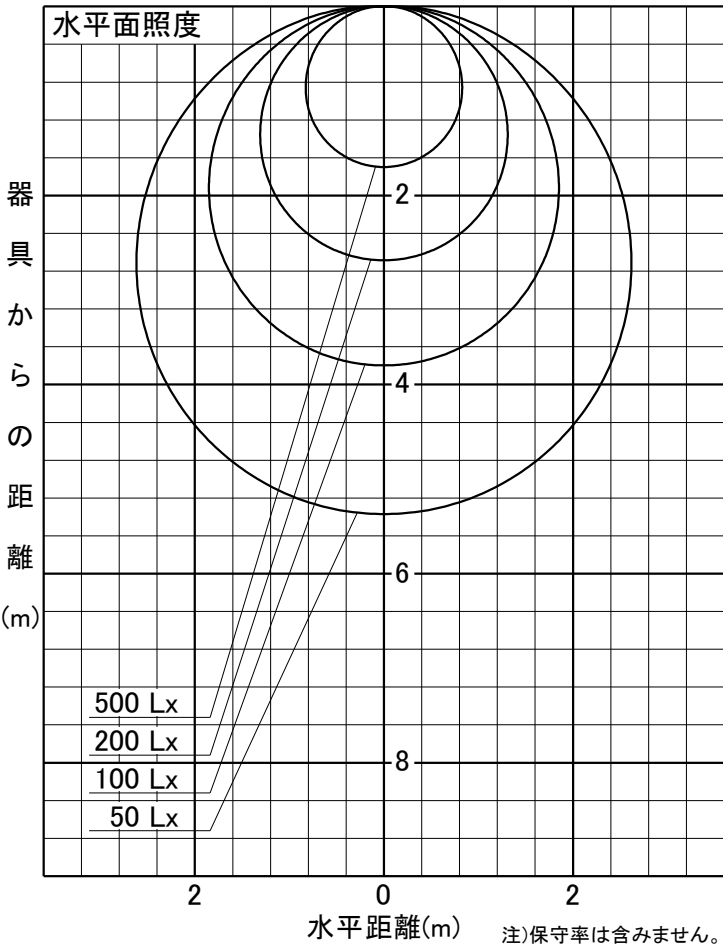

注)保守率は含みません。