

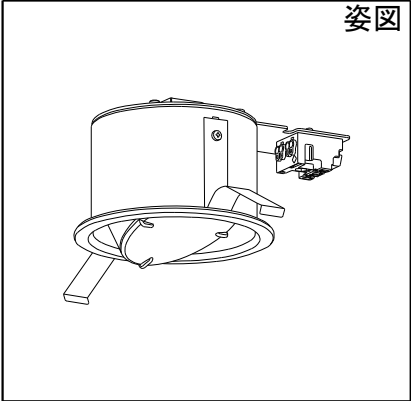


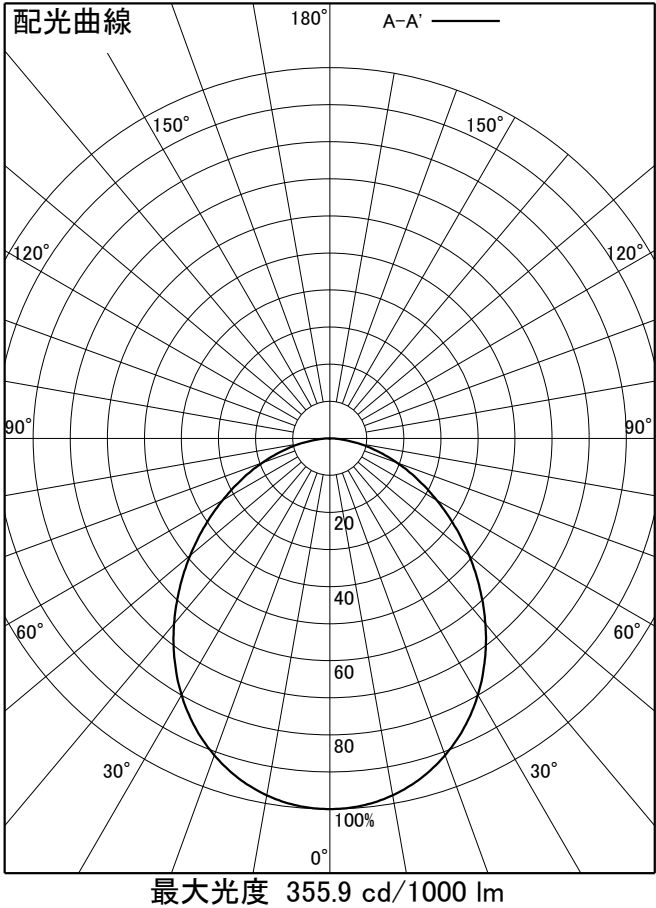

品 番	DDL-5629ABG
光 源	LDF7WW-H-GX53/D/V <DAIKO>
ランプ光束	770 lm
1/2照度角	62°
1/2ビーム角	99°

器具効率	87.5 %
上方光束	0.0 %
下方光束	87.5 %
器具間隔 最大限 (取付高さH)	A 1.19H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80								70								50								30								20	0						
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0						
室指数		照 明 率																																				(× 0.01)			
0.6	57	53	45	43	37	36	32	32	56	52	44	42	37	36	32	32	53	50	43	41	37	36	32	32	51	48	42	40	36	35	32	32	31	30							
0.8	67	61	54	51	46	44	41	40	65	59	53	50	46	44	40	40	61	57	52	49	45	44	40	39	58	55	50	48	44	43	40	39	39	37							
1	74	66	62	58	54	51	48	46	72	65	61	57	53	51	48	46	68	63	59	55	52	50	47	46	64	60	56	54	51	49	46	46	46	44							
1.25	81	72	69	64	61	58	56	53	78	70	68	63	61	57	55	53	73	68	65	61	59	56	54	52	69	65	63	60	57	56	53	52	52	50							
1.5	85	75	75	68	67	63	62	58	83	74	73	67	66	62	61	58	78	71	70	66	64	61	59	57	73	69	67	64	62	60	58	57	57	55							
2	92	80	83	75	77	70	71	66	89	79	81	74	75	69	70	65	84	76	77	72	72	68	68	65	79	74	74	70	70	67	66	64	64	62							
2.5	97	83	89	79	83	74	78	71	93	82	87	78	81	74	76	71	87	80	82	76	78	73	74	70	82	77	78	74	74	71	71	69	69	67							
3	100	86	93	81	87	78	83	75	96	84	90	80	85	77	81	74	90	82	85	79	81	76	78	73	85	80	81	77	78	75	75	72	72	70							
4	103	88	98	85	93	82	89	79	100	87	95	84	91	81	87	79	93	84	90	82	86	80	83	78	88	82	85	80	82	78	80	77	76	74							
5	106	89	101	87	97	84	94	82	102	88	98	86	94	84	91	82	95	86	92	84	89	82	87	80	89	84	87	82	85	81	83	79	79	77							
7	109	91	105	90	102	88	100	86	105	90	102	89	99	87	97	86	98	88	96	87	94	86	92	84	92	86	90	85	89	84	87	83	82	81							
10	111	93	109	92	106	90	104	89	107	92	105	91	103	90	101	89	100	90	98	89	97	88	95	87	93	88	92	87	91	86	90	85	85	83							

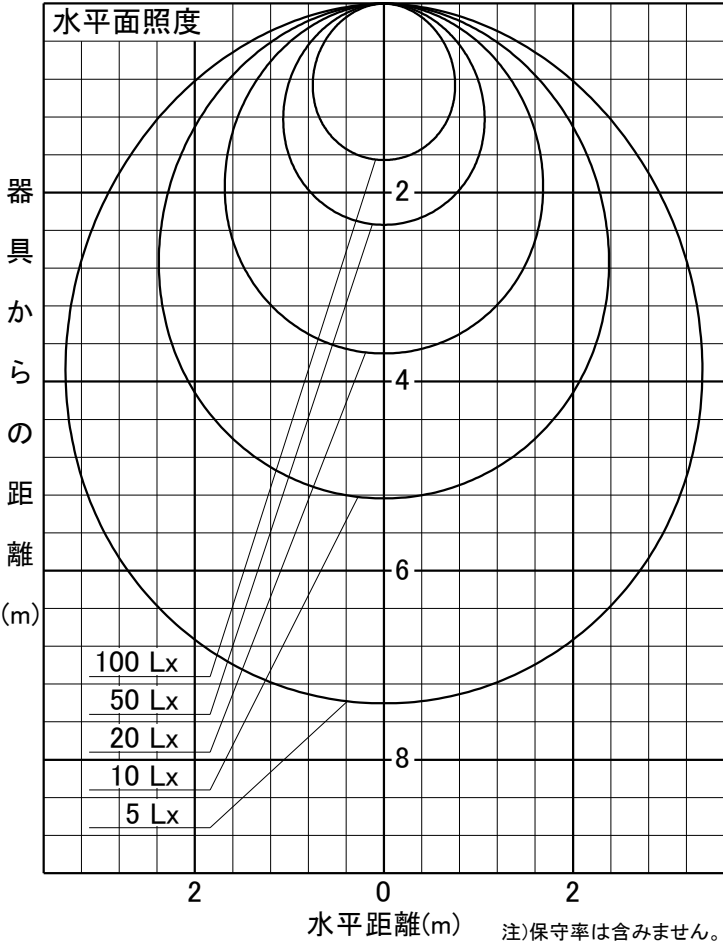

注)保守率は含みません。