

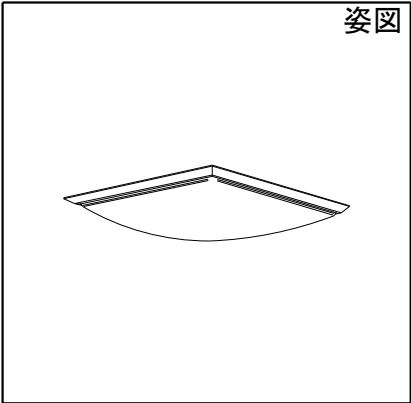


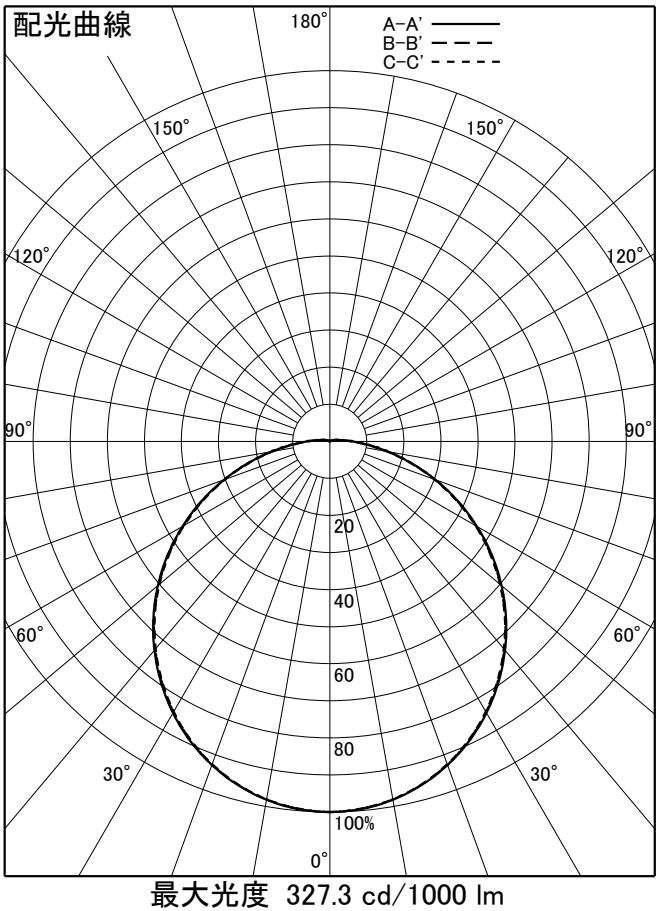

品 番	DCL-41971_7800K
光 源	LED 44.5W 7800K~2700K
定格光束	5200 lm
1/2照度角	A-A' 64° B-B' 64°
1/2ビーム角	A-A' 114° B-B' 114°

器具効率	100.0 %
上方光束	2.1 %
下方光束	97.9 %
器具間隔 最大限 (取付高さH)	A 1.26H B 1.25H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																															(× 0.01)		
室指数																																			
0.6	62	57	47	44	38	37	32	31	60	55	46	44	37	36	32	31	56	53	44	43	37	36	31	31	53	50	43	41	36	35	31	31	30	29	
0.8	72	66	57	54	48	46	41	40	70	64	56	53	47	45	40	40	65	61	54	51	46	44	40	39	62	58	52	50	45	44	39	39	39	36	
1	80	72	66	61	56	53	49	47	78	71	64	60	55	53	48	47	73	67	62	58	54	52	48	46	68	64	59	57	52	51	47	46	46	43	
1.25	88	78	74	68	65	61	57	55	85	76	73	67	64	60	57	54	79	73	69	65	61	59	55	54	74	70	66	63	59	58	54	53	53	50	
1.5	94	83	81	73	71	66	64	61	90	81	79	72	70	66	63	60	84	77	75	70	67	64	62	59	79	74	71	68	65	63	60	59	58	56	
2	102	89	91	81	82	75	75	70	98	87	88	80	80	74	74	69	91	83	83	77	77	72	71	68	85	80	79	75	74	71	69	67	67	64	
2.5	107	92	97	86	89	80	83	76	103	91	94	85	87	80	81	75	96	87	89	82	83	78	78	74	89	84	84	80	79	76	75	73	72	70	
3	111	95	102	89	95	85	89	80	107	93	99	88	92	84	87	80	99	90	93	86	88	82	83	78	92	87	88	83	84	80	80	77	76	74	
4	115	98	108	94	102	90	97	86	111	96	105	92	99	89	94	85	103	93	98	90	94	87	90	84	96	90	92	87	89	85	86	82	81	79	
5	118	100	112	96	107	93	102	90	114	98	108	95	104	92	99	89	105	95	101	92	98	90	94	87	98	92	95	90	92	88	90	86	85	82	
7	122	103	118	100	114	98	110	95	117	101	113	99	110	96	107	94	109	98	106	96	103	94	101	92	101	95	99	94	97	92	95	90	89	87	
10	125	104	122	103	119	101	116	99	120	103	117	101	115	100	112	98	111	100	109	99	107	97	105	96	104	97	102	96	101	95	99	94	93	91	

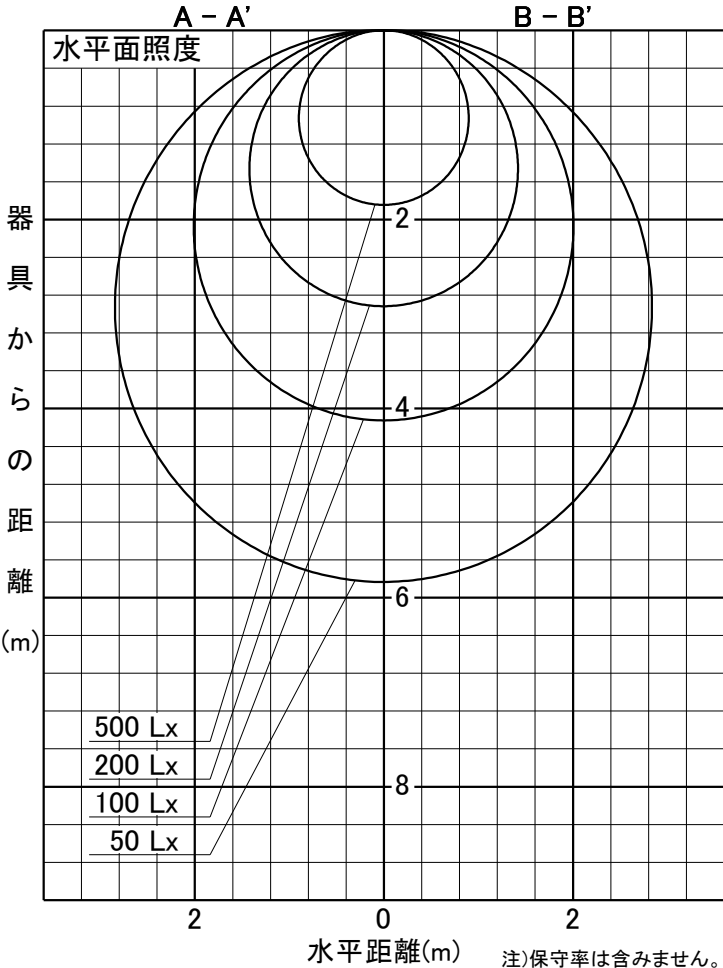

注)保守率は含みません。