

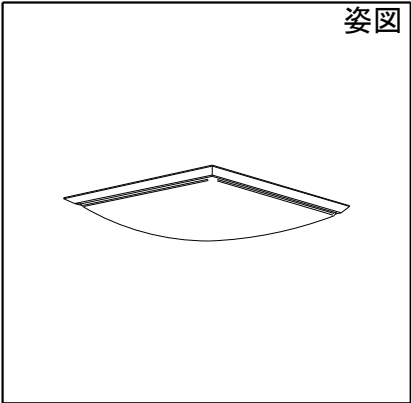


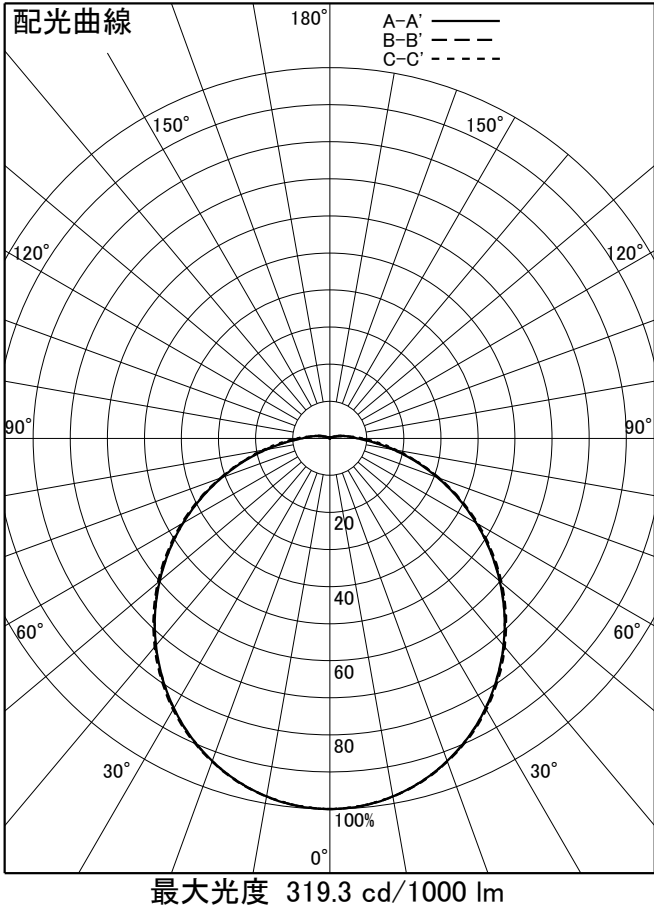

品 番	DCL-41970_4800K
光 源	LED 32W 7800K~2700K
定格光束	4200 lm
1/2照度角	A-A' 64° B-B' 64°
1/2ビーム角	A-A' 114° B-B' 115°

器具効率	100.0 %
上方光束	3.1 %
下方光束	96.9 %
器具間隔 最大限 (取付高さH)	A 1.25H B 1.26H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	61	56	46	44	37	36	31	31	59	55	45	43	37	36	31	31	56	52	44	42	36	35	31	30	52	50	42	41	35	35	30	30	30	28			
0.8	72	65	57	53	47	45	40	39	69	63	55	52	46	45	40	39	65	60	53	51	45	44	39	38	61	57	51	49	44	43	38	38	38	36			
1	80	72	65	61	55	53	48	47	77	70	64	60	54	52	48	46	72	66	61	58	53	51	47	46	67	63	58	56	51	50	46	45	45	42			
1.25	88	78	74	68	64	60	56	54	84	76	72	66	63	59	56	53	78	72	68	64	60	58	54	53	73	69	65	62	58	57	53	52	52	49			
1.5	93	82	80	73	71	65	63	60	90	80	78	71	69	65	62	59	83	76	74	69	66	63	60	58	78	73	70	67	64	62	59	57	57	55			
2	101	88	90	80	81	74	74	69	97	86	87	79	79	73	73	68	90	82	82	76	76	71	70	67	84	79	78	74	72	70	68	66	65	63			
2.5	106	92	97	85	88	80	82	75	102	90	93	84	86	79	80	74	95	86	88	81	82	77	77	73	88	83	83	79	78	75	74	71	71	68			
3	110	94	101	89	94	84	88	79	106	93	98	87	91	83	86	79	98	89	92	85	87	81	82	77	91	86	86	82	82	79	78	76	75	72			
4	115	98	108	93	101	89	96	85	110	96	104	92	98	88	93	84	102	92	97	89	93	86	89	83	95	89	91	86	87	83	84	81	80	77			
5	118	100	112	96	106	92	101	89	113	98	108	94	103	91	98	88	104	94	100	91	96	89	93	86	97	91	94	89	91	86	88	84	83	81			
7	122	102	117	99	113	97	109	94	117	100	113	98	109	96	106	93	108	97	105	95	102	93	99	91	100	94	98	92	96	91	94	89	88	86			
10	124	104	121	102	118	100	115	98	119	102	116	101	114	99	111	97	110	99	108	98	106	96	104	95	103	96	101	95	99	94	98	93	92	89			

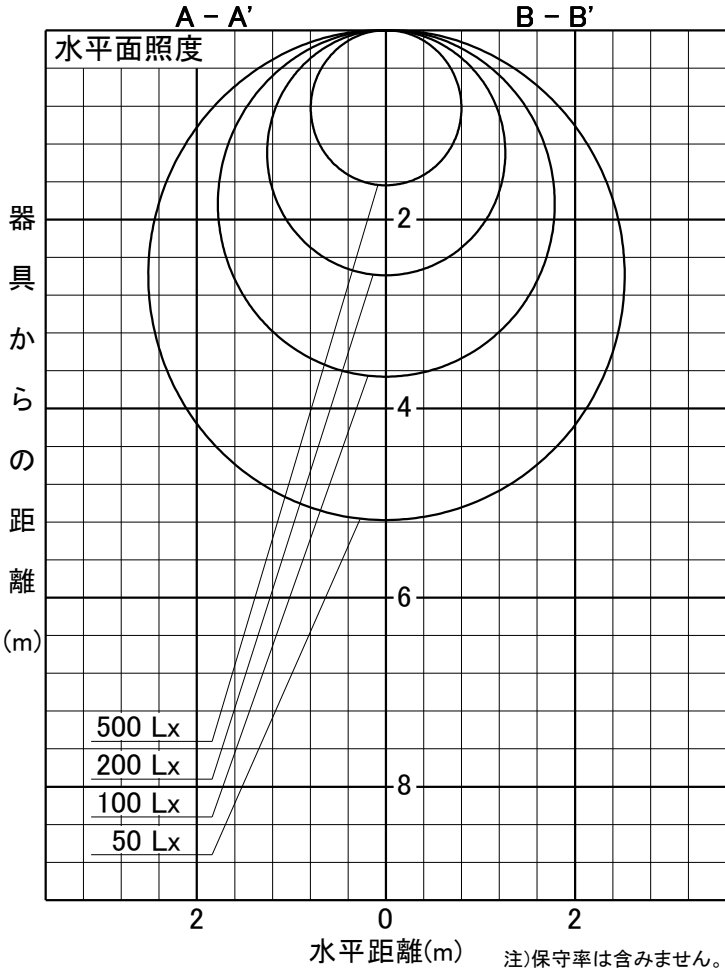

注)保守率は含みません。