

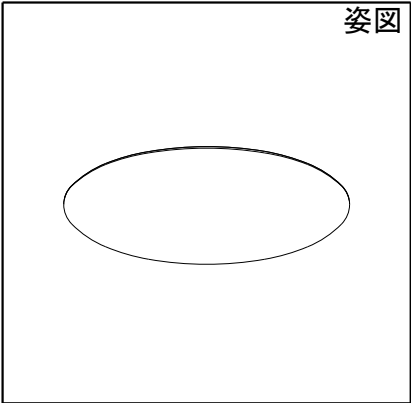


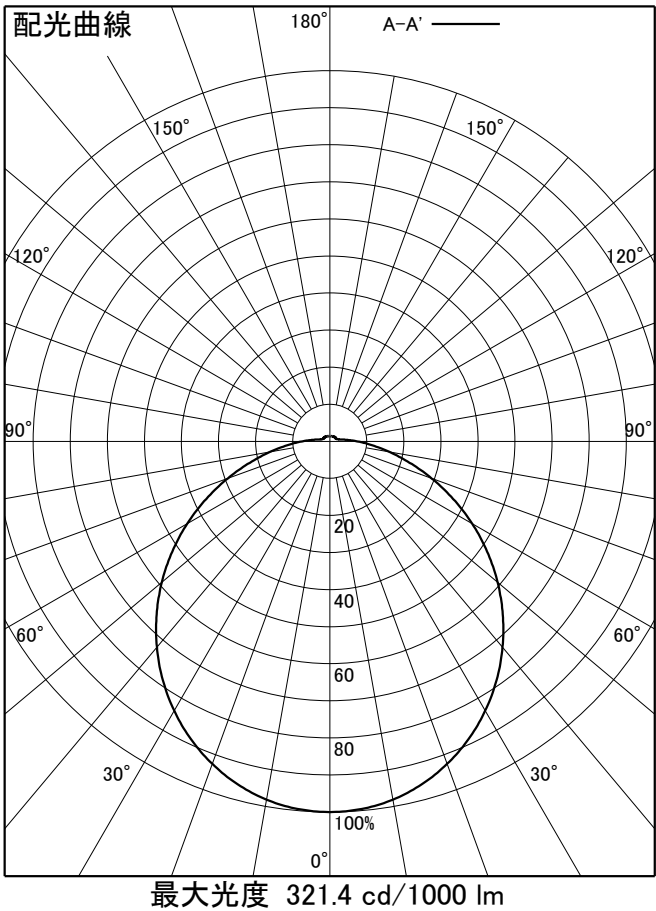

品 番	DCL-41965_7800K
光 源	LED 35W 7800K~2700K
定格光束	4300 lm
1/2照度角	64°
1/2ビーム角	112°

器具効率	100.0 %
上方光束	4.8 %
下方光束	95.2 %
器具間隔 最大限 (取付高さH)	A 1.25H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																														(× 0.01)			
室指数																																			
0.6	61	56	47	44	38	37	32	31	59	55	46	44	37	36	31	31	56	52	44	42	36	35	31	31	52	49	42	41	35	35	30	30	30	28	
0.8	72	65	57	54	47	45	41	40	69	63	56	53	47	45	40	39	65	60	53	51	45	44	39	39	60	57	51	49	44	43	39	38	38	36	
1	80	72	66	61	56	53	49	47	77	70	64	60	55	52	48	47	72	66	61	58	53	51	47	46	67	63	58	56	51	50	46	45	45	42	
1.25	88	78	74	68	64	60	57	54	84	76	72	67	63	60	56	54	78	72	68	64	61	58	55	53	73	69	65	62	58	57	53	52	52	49	
1.5	93	82	81	73	71	66	64	60	90	80	78	72	69	65	63	60	83	76	74	69	67	63	61	59	77	73	70	67	64	62	59	57	57	54	
2	101	88	90	81	82	74	75	69	97	86	87	79	79	73	73	68	90	82	82	76	76	71	70	67	84	79	77	74	72	69	68	66	65	62	
2.5	106	92	97	85	89	80	82	75	102	90	93	84	86	79	80	74	94	86	88	81	82	77	77	73	88	82	82	78	78	75	74	71	70	68	
3	110	94	102	89	94	84	88	80	106	92	98	87	92	83	86	79	98	89	92	84	86	81	82	77	91	85	86	81	82	78	78	75	75	72	
4	115	98	108	93	101	89	96	86	110	96	104	91	98	88	93	84	101	92	97	88	92	85	88	82	94	88	90	85	87	83	84	80	79	77	
5	118	99	112	96	106	92	101	89	113	98	107	94	103	91	98	88	104	94	100	91	96	88	93	86	96	90	93	88	90	86	88	84	83	80	
7	121	102	117	99	113	97	109	95	116	100	112	98	109	95	105	93	107	97	104	95	101	93	99	91	99	93	97	92	95	90	93	88	87	84	
10	124	104	121	102	118	100	115	98	119	102	116	100	113	99	111	97	110	99	107	97	105	96	104	94	102	95	100	94	98	93	97	92	91	88	

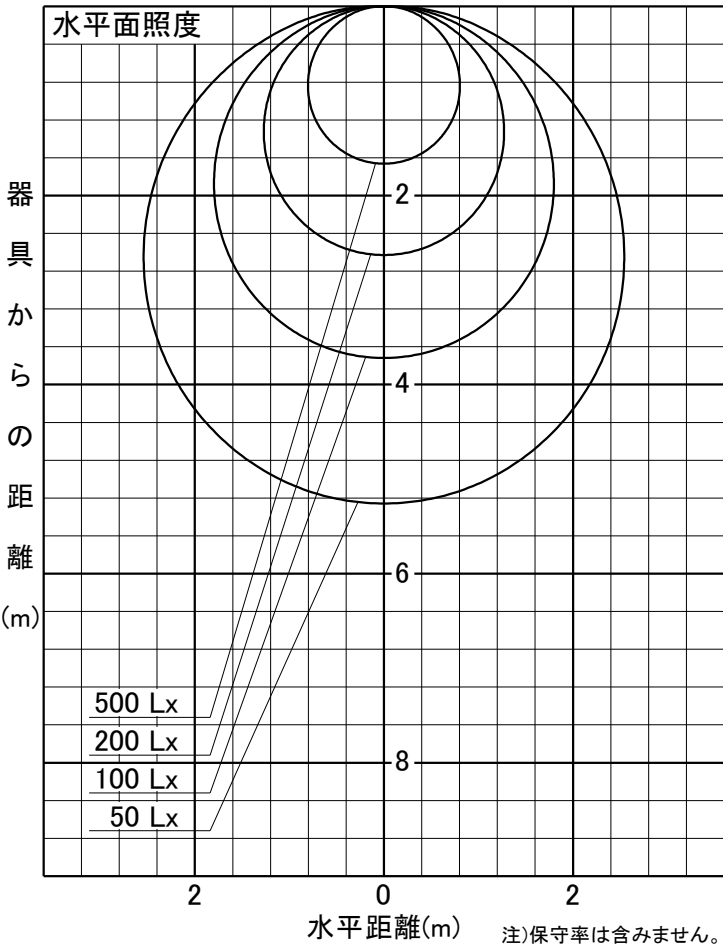

注)保守率は含みません。