




姿义



品番	DDL-5599YB
光源	LED 6.8W 2700K
定格光束	570 lm
1/2照度角	60°
1/2ビーム角	89°

器具効率	100.0 %
上方光束	0.1 %
下方光束	99.9 %
器具間隔 最大限 (取付高さH)	A 1.15H
保 守 率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80								70								50								30								20	0	
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照 明 率 (× 0.01)																																			
0.6	71	65	58	55	50	48	44	44	69	64	57	54	49	48	44	43	66	62	55	53	49	48	44	43	63	60	54	52	48	47	44	43	43	42		
0.8	81	74	68	64	60	58	54	53	79	73	67	64	59	57	54	53	76	70	65	62	58	57	53	52	72	68	64	61	57	56	53	52	52	50		
1	90	81	77	72	69	65	63	61	87	79	76	71	68	65	62	61	83	77	73	70	67	64	62	60	79	74	71	68	65	64	61	60	60	58		
1.25	97	86	86	78	77	73	71	68	94	85	84	78	76	72	71	68	89	82	81	76	74	71	69	67	85	80	78	75	72	70	68	67	67	65		
1.5	102	90	92	83	84	78	78	74	99	89	90	82	83	77	77	73	94	86	86	81	80	76	75	73	89	84	83	79	78	75	74	72	72	70		
2	109	95	100	90	94	85	88	82	106	94	98	89	92	85	87	81	100	91	94	87	88	83	84	80	94	89	90	85	85	82	82	80	79	77		
2.5	114	98	106	94	100	90	95	87	110	97	103	93	98	89	93	86	104	94	98	91	94	88	90	85	98	92	94	89	90	87	87	84	84	82		
3	117	100	110	96	105	93	100	91	113	99	107	95	102	93	98	90	106	96	102	94	98	91	94	89	100	94	97	92	94	90	91	88	87	85		
4	120	102	115	99	110	97	106	95	116	101	112	98	107	96	104	94	109	99	105	96	102	94	99	93	103	96	100	95	97	93	95	91	91	89		
5	122	104	118	101	114	99	110	97	118	102	114	100	111	98	108	96	111	100	108	98	105	96	102	95	104	98	102	96	100	95	98	93	93	91		
7	125	105	122	104	119	102	117	101	121	104	118	103	116	101	113	100	113	102	111	101	109	100	107	99	106	100	105	99	103	98	102	97	96	94		
10	127	107	125	106	123	105	121	104	123	105	121	104	119	104	117	103	115	103	113	102	112	102	111	101	108	101	107	100	105	100	105	99	98	96		

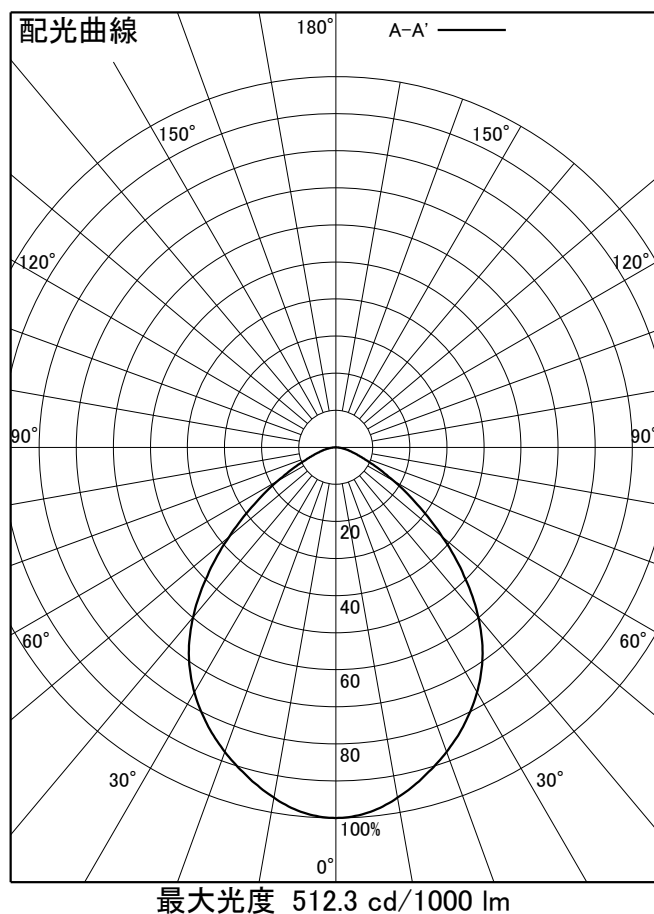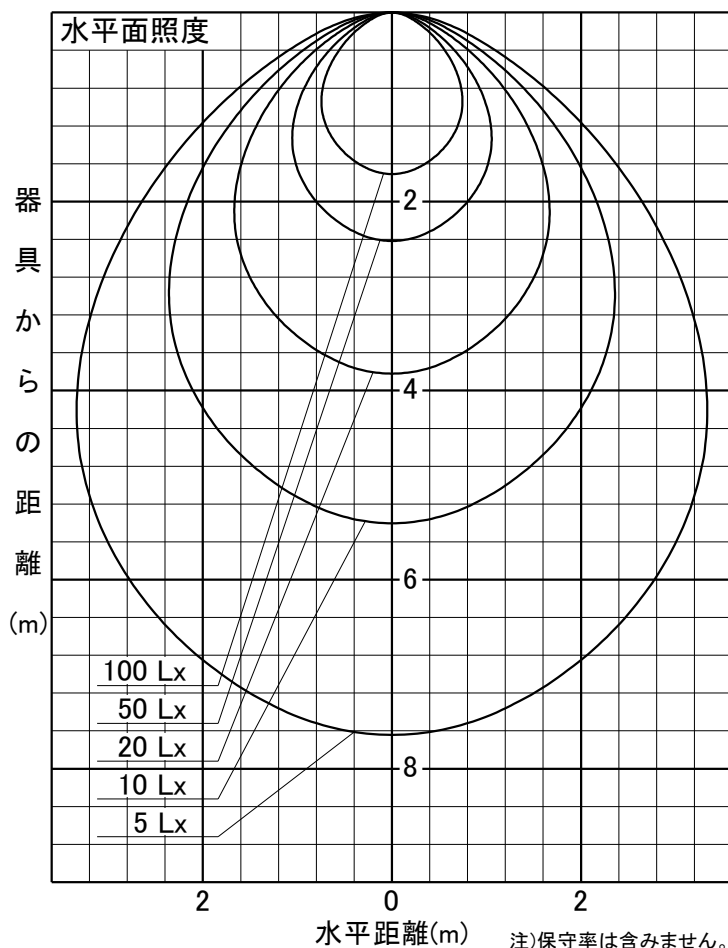

注)保守率は含みません。