
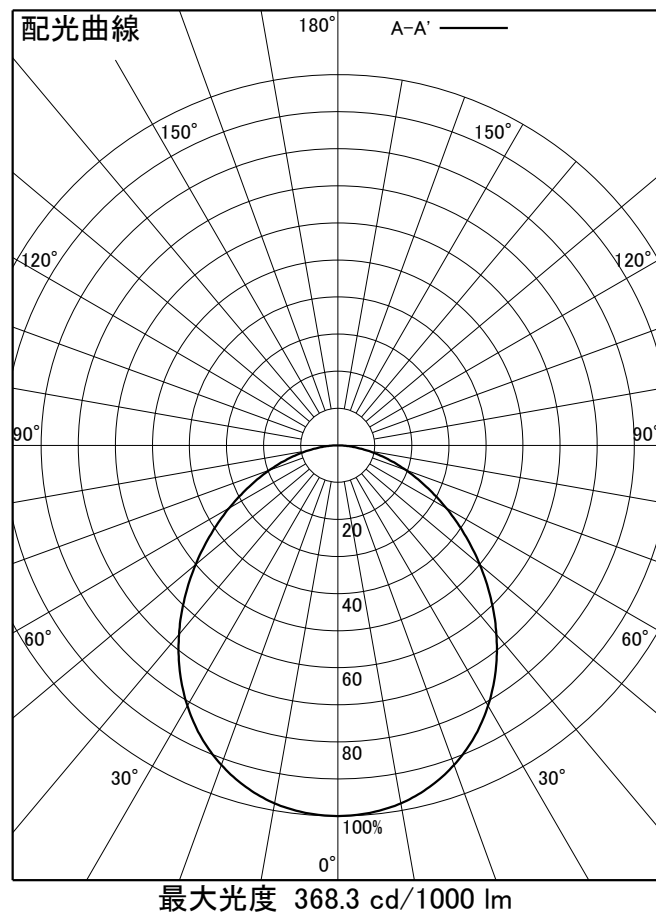


品番	DDL-5628WWG
光源	LDF5N-H-GX53/D/V <DAIKO>
ランプ光束	550 lm
1/2照度角	62°
1/2ビーム角	100°

器具効率	92.0 %	
上方光束	0.0 %	
下方光束	92.0 %	
器具間隔 最大限 (取付高さH)	A	1.21H
保守率	良	0.67
	中	0.63
	否	0.56

反射率 (%)	天井		80								70								50								30								20		0
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	30	10	10	0							
室指数	照明率 (×0.01)																																				
0.6	60	55	47	45	39	38	34	33	59	54	46	44	39	38	34	33	56	52	45	43	38	37	33	33	53	50	44	42	38	37	33	33	33	31			
0.8	70	64	57	53	48	47	43	41	68	62	56	53	48	46	42	41	64	60	54	52	47	46	42	41	61	58	52	50	46	45	41	41	41	39			
1	78	70	65	60	57	54	50	49	75	68	64	60	56	53	50	48	71	66	61	58	54	53	49	48	67	63	59	57	53	52	49	48	48	46			
1.25	85	75	73	67	64	60	58	56	82	74	71	66	64	60	58	55	77	71	68	64	62	59	57	55	73	69	66	63	60	58	56	54	54	52			
1.5	90	79	79	71	71	66	64	61	87	78	77	71	70	65	64	61	82	75	74	69	67	64	62	60	77	72	70	67	65	63	61	60	59	57			
2	97	84	88	78	80	73	74	69	94	83	85	77	79	73	73	69	88	80	81	75	76	71	71	68	83	78	77	74	73	70	69	67	67	65			
2.5	101	88	93	82	87	78	81	74	98	86	91	81	85	77	80	74	92	84	86	80	81	76	77	73	86	81	82	78	78	75	75	72	72	70			
3	105	90	98	85	92	82	87	78	101	88	95	84	90	81	85	78	95	86	90	83	85	80	82	77	89	84	85	81	82	78	79	76	75	74			
4	109	92	103	89	98	86	94	83	105	91	100	88	95	85	91	83	98	89	94	86	90	84	87	81	92	86	89	84	86	82	84	80	80	78			
5	111	94	106	91	102	89	98	86	107	93	103	90	99	88	96	86	100	90	97	88	94	86	91	84	94	88	91	86	89	85	87	83	82	81			
7	114	96	111	94	108	92	105	91	110	95	107	93	104	91	102	90	103	93	100	91	98	90	96	88	96	90	95	89	93	88	91	87	86	84			
10	116	97	114	96	112	95	110	94	112	96	110	95	108	94	106	93	105	94	103	93	101	92	100	91	98	92	97	91	96	90	95	90	89	87			

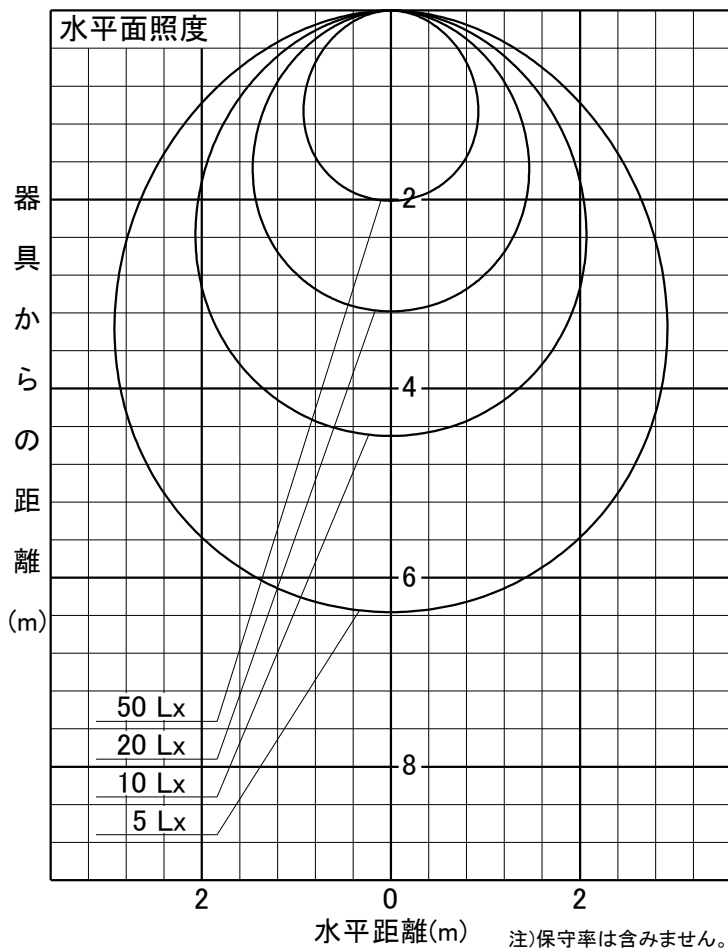

注)保守率は含みません。