
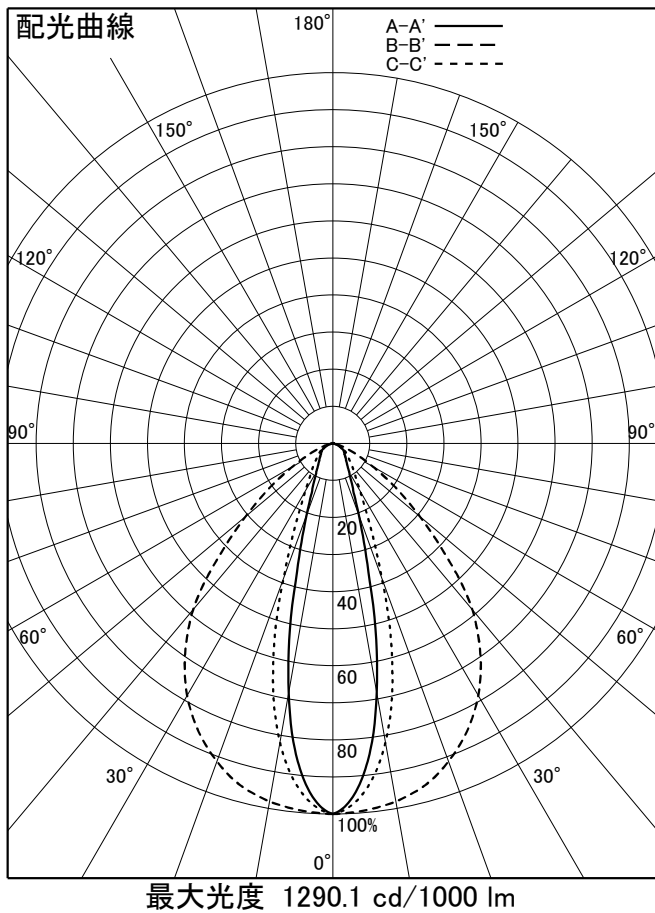


品番	LLY-7066NUNE
光源	LED 59W 4000K
定格光束	6700 lm
1/2照度角	A-A' 25° B-B' 61°
1/2ビーム角	A-A' 26° B-B' 86°

器具効率	100.0 %	
上方光束	0.0 %	
下方光束	100.0 %	
器具間隔最大限 (取付高さH)	A	0.44H
	B	1.17H
保守率	良	0.69
	中	0.67
	否	0.63

反射率(%)	天井	80								70								50								30								20		0
	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	30	10	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0						
室指数	照明率 (×0.01)																																			
0.6	79	73	67	64	60	59	56	55	77	72	67	64	60	58	55	55	75	70	65	63	59	58	55	55	72	68	64	62	59	58	55	54	54	53		
0.8	88	80	77	72	69	66	64	62	86	79	76	71	69	66	64	62	83	77	74	70	68	66	63	62	79	75	72	69	66	65	62	62	62	60		
1	95	86	84	78	77	73	72	69	93	84	83	78	76	73	71	69	89	82	81	76	75	72	70	69	85	80	78	75	73	71	69	68	68	67		
1.25	102	90	92	84	84	79	79	75	99	89	90	83	83	79	78	75	94	87	87	82	81	78	77	75	90	85	84	80	79	77	76	74	74	72		
1.5	106	93	97	88	90	83	85	80	103	92	95	87	89	83	84	80	98	90	91	85	86	82	82	79	93	88	88	84	84	81	80	78	78	77		
2	112	98	105	93	99	90	94	87	109	97	102	93	97	89	92	87	103	94	98	91	93	88	90	86	98	92	94	89	90	87	87	85	84	83		
2.5	116	101	110	97	105	94	100	92	113	99	107	96	102	93	98	91	107	97	102	94	98	92	95	90	101	95	98	93	95	91	92	89	89	87		
3	119	102	114	99	109	97	105	95	116	101	111	99	106	96	103	94	109	99	105	97	102	95	99	93	103	97	100	95	98	93	95	92	92	90		
4	122	104	118	102	114	100	111	98	118	103	115	101	111	99	108	98	111	101	108	99	106	98	103	96	105	99	103	97	101	96	99	95	94	93		
5	124	105	121	104	117	102	114	101	120	104	117	103	114	101	112	100	113	102	110	101	108	99	106	98	106	100	105	99	103	98	101	97	96	95		
7	127	107	125	106	122	105	120	104	123	106	121	105	119	104	117	103	115	104	113	103	112	102	111	102	108	102	107	101	106	100	105	100	99	97		
10	129	108	127	107	126	107	124	106	124	107	123	106	122	106	120	105	116	104	115	104	114	104	113	103	109	102	108	102	108	102	107	102	101	99		

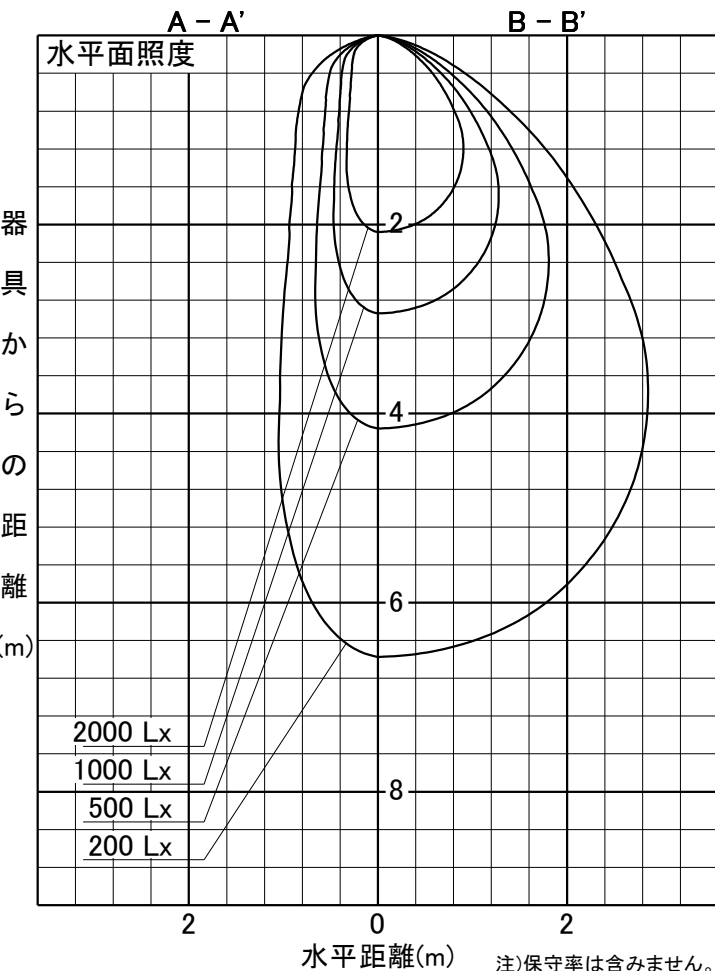

注)保守率は含みません。