
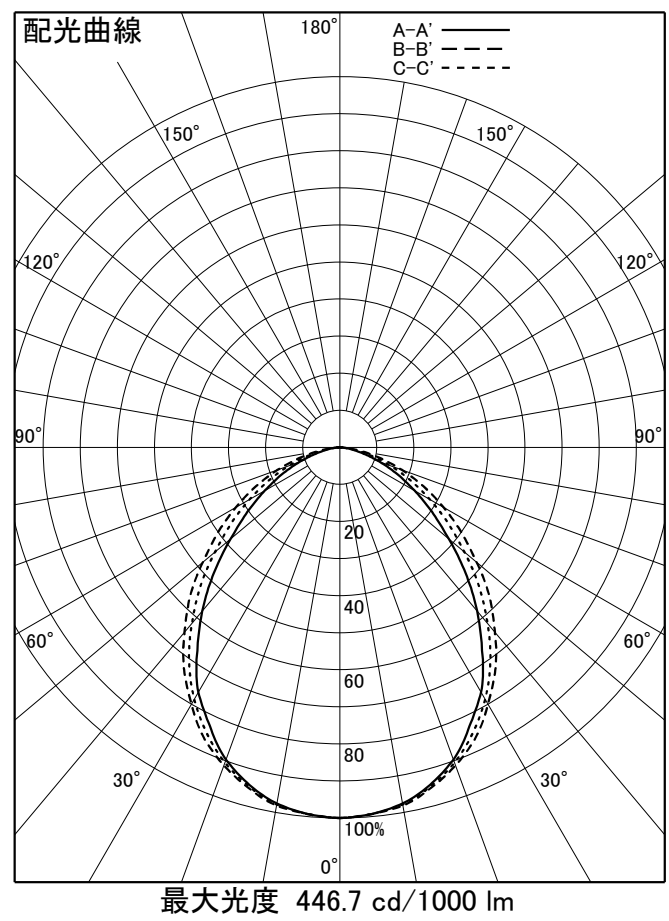


品番	LLY-7066NUWE
光源	LED 59W 4000K
定格光束	5800 lm
1/2照度角	A-A' 60° B-B' 62°
1/2ビーム角	A-A' 88° B-B' 98°

器具効率	100.0 %	
上方光束	0.0 %	
下方光束	100.0 %	
器具間隔 最大限 (取付高さH)	A	1.15H
	B	1.19H
保守率	良	0.69
	中	0.67
	否	0.63

反射率 (%)	天井		80								70								50								30								20		0	
	壁	床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10		0	
	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数	照明率 (×0.01)																																					
0.6	68	62	54	51	45	44	40	39	66	61	53	51	45	44	40	39	63	59	52	50	44	43	39	39	60	57	50	49	44	43	39	39	39	37				
0.8	78	71	64	61	56	53	49	48	76	70	63	60	55	53	49	48	72	67	61	59	54	52	49	48	69	65	60	57	53	52	48	48	47	46				
1	86	78	73	68	64	61	58	56	84	76	72	67	64	61	58	56	79	74	69	66	62	60	57	55	75	71	67	64	61	59	56	55	55	53				
1.25	94	83	82	75	73	68	66	63	91	82	80	74	72	68	66	63	86	79	77	72	70	67	65	63	81	77	74	71	68	66	63	62	62	60				
1.5	99	88	88	80	80	74	73	69	96	86	86	79	78	73	72	69	91	83	82	77	76	72	71	68	86	81	79	76	74	71	69	68	67	66				
2	107	93	97	87	90	82	84	78	104	92	95	86	88	81	83	77	97	89	90	84	85	80	80	77	92	86	86	82	82	79	78	76	75	74				
2.5	112	96	104	91	97	87	91	83	108	95	101	90	95	86	90	83	101	92	96	88	91	85	87	82	96	90	91	87	87	84	84	81	81	79				
3	115	99	108	95	102	91	97	88	111	97	105	93	100	90	95	87	104	95	99	91	95	89	91	86	98	92	94	90	91	87	88	85	84	82				
4	119	101	113	98	108	95	104	92	115	100	110	97	105	94	102	92	108	97	104	95	100	93	97	90	101	95	98	93	95	91	93	89	89	87				
5	122	103	117	100	112	98	109	96	117	102	113	99	109	97	106	95	110	99	106	97	103	95	101	93	103	97	101	95	98	93	96	92	91	89				
7	125	105	121	103	118	102	115	100	120	104	117	102	115	101	112	99	113	101	110	100	108	99	106	98	106	99	104	98	102	97	101	96	95	93				
10	127	106	125	105	123	104	120	103	123	105	120	104	119	103	117	102	114	103	113	102	111	101	110	100	107	101	106	100	105	99	104	99	98	96				

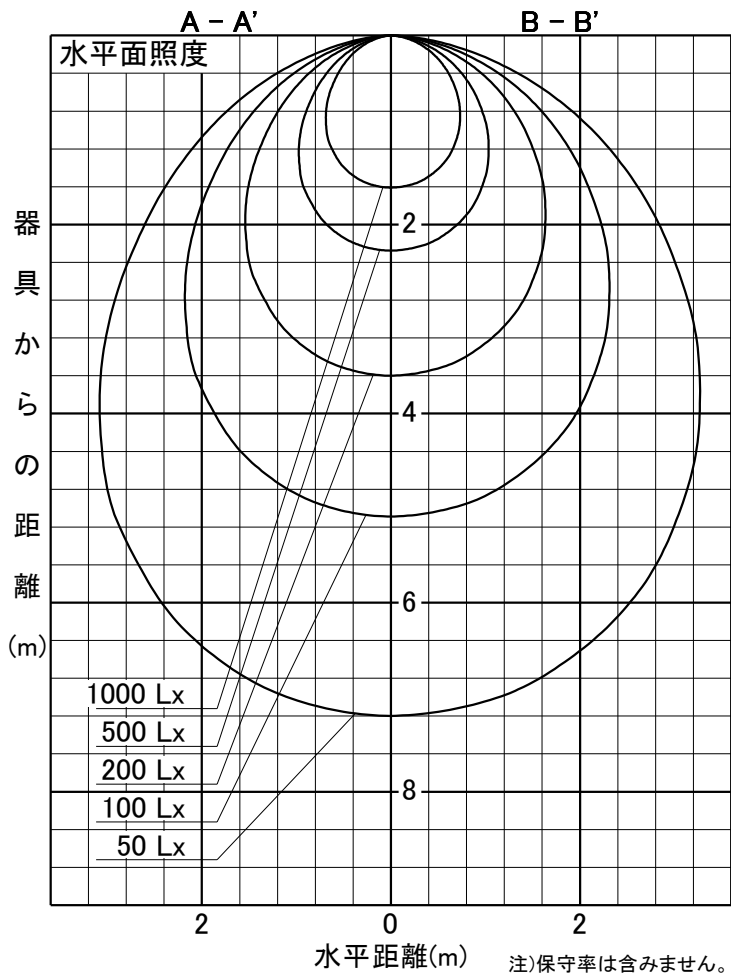

注)保守率は含みません。