

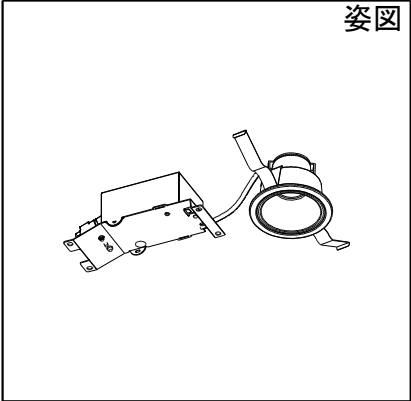


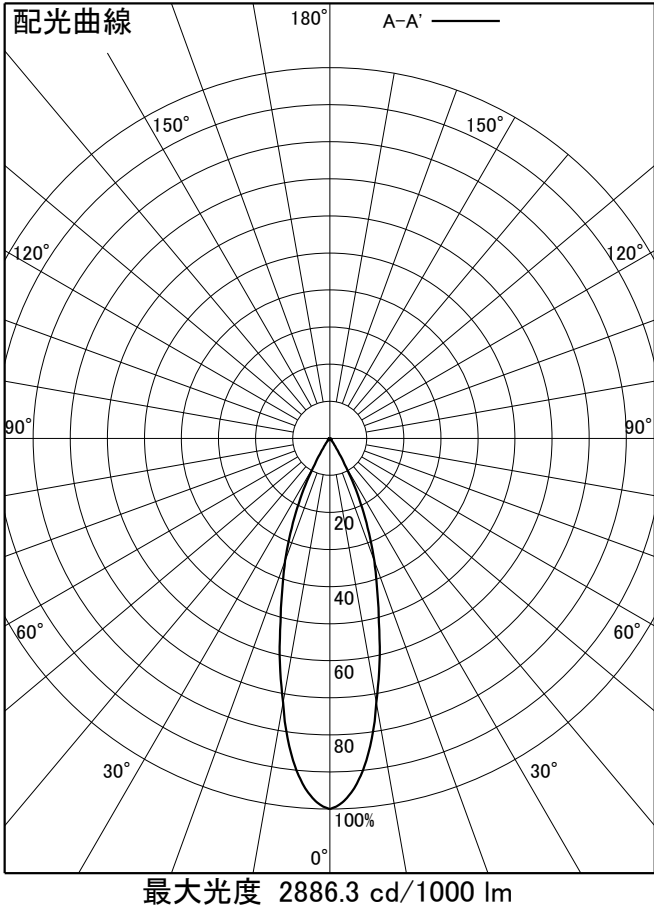

品 番	DDL-6236YWG
光 源	LED 7.8W 2700K
定格光束	520 lm
1/2照度角	28°
1/2ビーム角	31°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.51H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	93	86	84	80	79	76	75	74	92	85	84	80	78	76	75	74	89	84	82	79	78	76	74	74	87	83	81	79	77	76	74	74	73	73	
0.8	100	91	91	85	85	81	81	79	98	90	90	85	84	81	80	79	95	88	88	84	83	81	80	78	92	87	86	83	82	80	79	78	78	77	
1	105	95	97	90	91	86	87	84	103	94	96	89	90	86	86	84	99	92	93	88	89	85	85	83	96	91	91	87	87	85	84	83	83	82	
1.25	110	98	102	93	96	90	92	88	107	97	100	93	95	90	91	88	103	95	97	92	93	89	90	87	99	93	95	91	91	88	88	87	86	85	
1.5	113	100	106	96	100	93	96	91	110	99	104	95	99	93	95	91	106	97	100	94	96	92	93	90	101	95	97	93	94	91	91	89	89	88	
2	118	103	112	100	107	98	104	96	115	102	110	99	106	97	102	96	109	100	105	98	102	96	99	95	105	98	101	97	99	95	97	94	93	92	
2.5	121	105	116	103	112	101	109	100	118	104	114	102	110	100	107	99	112	102	109	100	106	99	104	98	107	100	104	99	102	98	100	97	96	95	
3	124	106	120	105	116	103	113	102	120	105	117	104	113	103	111	102	114	103	111	102	109	101	107	100	108	102	106	101	104	100	103	99	99	97	
4	126	107	123	106	120	105	118	105	122	106	120	105	117	105	115	104	115	104	113	104	112	103	110	103	109	103	108	102	107	102	105	101	101	99	
5	128	108	125	107	123	107	121	106	124	107	121	106	119	106	118	105	116	105	115	105	113	104	112	104	110	103	109	103	108	103	107	102	102	100	
7	130	109	128	109	127	109	126	109	126	108	124	108	123	108	122	108	118	106	117	106	116	106	116	106	111	104	111	105	110	105	110	105	104	102	
10	131	110	130	110	129	110	129	110	127	109	126	109	125	109	125	109	119	107	118	107	118	107	118	107	112	105	112	105	111	105	111	105	105	103	

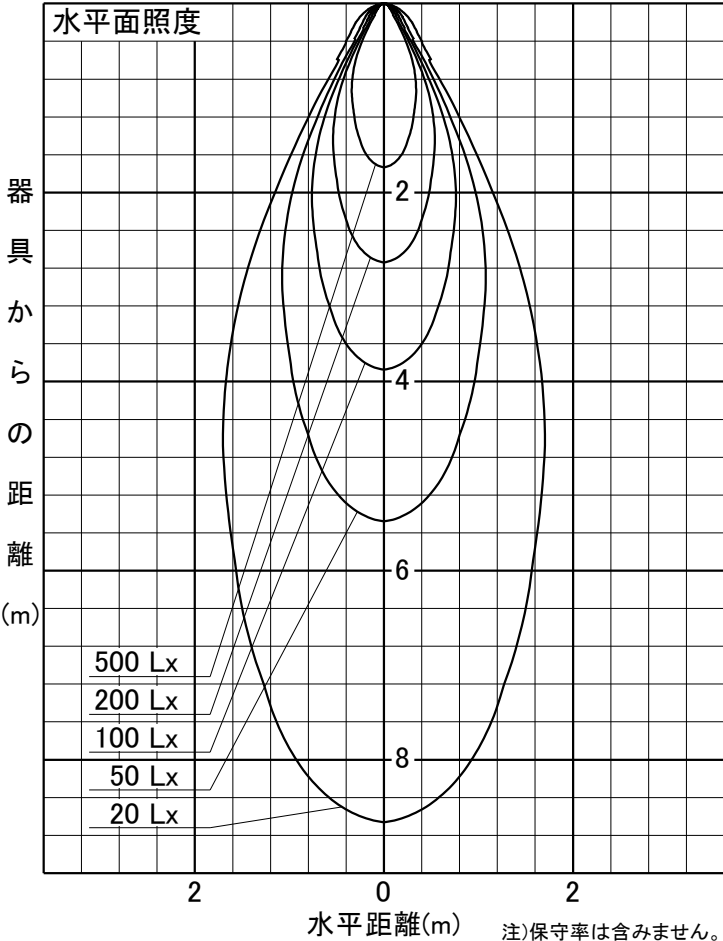

注)保守率は含みません。