

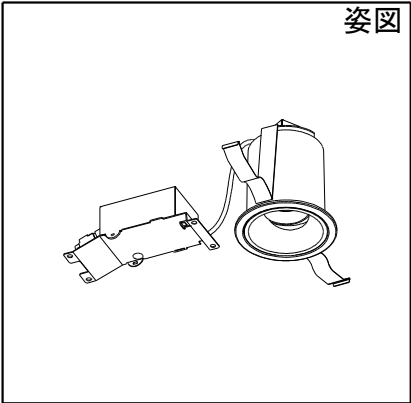


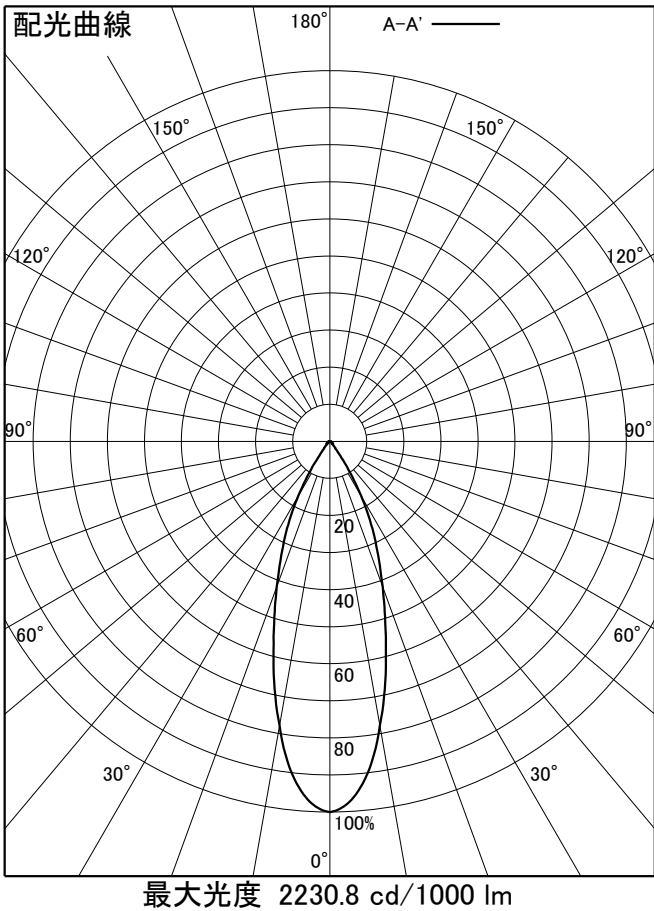

品 番	DDL-6239YWG
光 源	LED 5.8W 2700K
定格光束	410 lm
1/2照度角	31°
1/2ビーム角	35°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.56H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																														(× 0.01)					
0.6		92	84	82	78	77	75	73	72	90	84	82	78	76	74	73	72	88	82	80	77	76	74	72	72	85	81	79	77	75	74	72	71	71	70		
0.8		98	89	89	84	83	80	79	77	96	88	88	83	82	79	79	77	93	87	86	82	81	79	78	76	90	85	84	81	80	78	77	76	76	75		
1		104	93	95	89	89	85	85	82	102	93	94	88	89	85	85	82	98	91	91	87	87	84	83	82	94	89	89	86	85	83	82	81	81	80		
1.25		109	97	101	92	95	89	91	86	106	96	99	92	94	89	90	86	102	94	96	90	91	88	88	85	98	92	93	89	89	87	86	85	85	83		
1.5		112	99	105	95	99	92	95	90	109	98	103	94	98	91	94	89	104	96	99	93	95	90	92	88	100	94	96	91	92	89	90	88	87	86		
2		117	102	111	99	106	97	102	95	114	101	109	98	104	96	101	94	108	99	104	97	101	95	98	93	103	97	100	95	97	94	95	92	92	90		
2.5		121	104	115	102	111	100	108	98	117	103	113	101	109	99	106	98	111	101	107	99	104	98	102	97	105	99	103	98	101	96	99	95	95	93		
3		123	105	119	104	115	102	112	101	119	104	115	103	112	102	110	100	113	102	110	101	107	100	105	99	107	100	105	99	103	99	101	98	97	96		
4		125	107	122	106	119	105	116	104	121	106	119	105	116	104	114	103	114	103	112	103	110	102	109	101	108	101	107	101	105	100	104	100	99	97		
5		127	107	124	107	122	106	120	105	123	106	120	106	118	105	117	104	115	104	114	104	112	103	111	103	109	102	108	102	107	101	106	101	100	98		
7		129	109	128	108	126	108	125	108	125	108	123	107	122	107	121	107	117	105	116	105	115	105	114	105	110	103	110	103	109	103	108	103	102	101		
10		131	109	130	109	129	109	128	109	126	108	125	108	124	108	124	108	118	106	117	106	117	106	116	106	111	104	110	104	110	104	110	104	103	101		

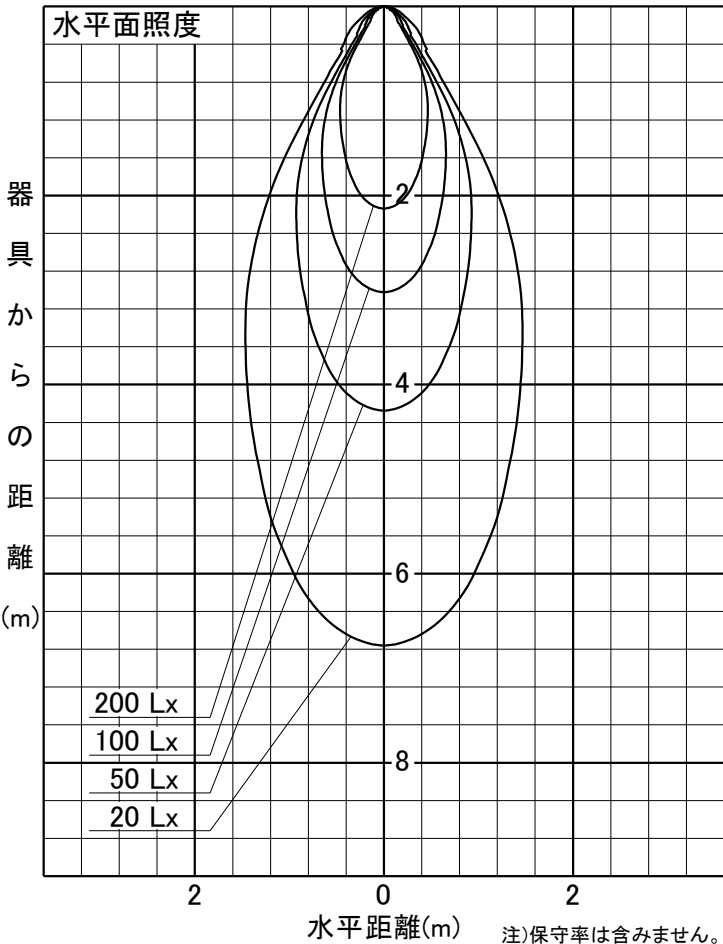

注)保守率は含みません。