

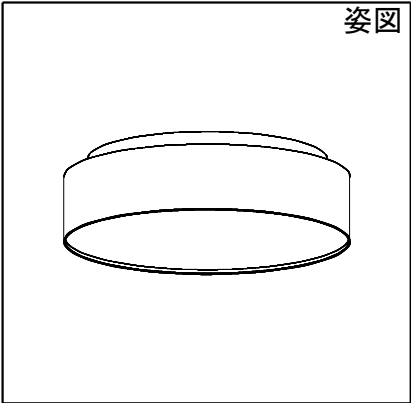


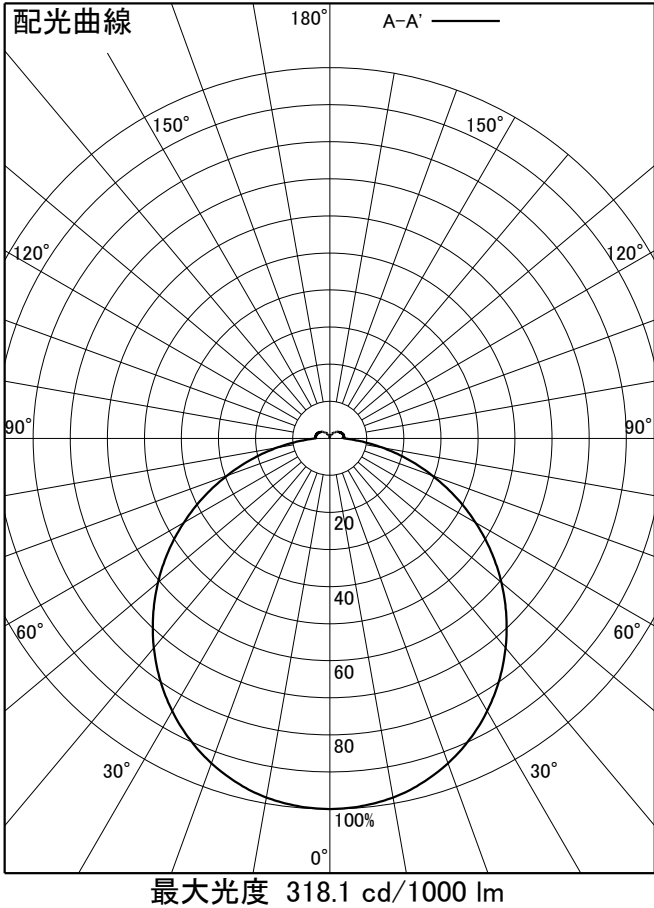

品 番	DCL-42069_5000K
光 源	LED 31.1W 6500K~2700K
定格光束	3360 lm
照度角	65°
ビーム角	114°

器具効率	100.0 %
上方光束	5.8 %
下方光束	94.2 %
器具間隔 最大限 (取付高さH)	A 1.26H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	61	56	47	44	38	37	32	31	59	55	46	44	37	36	32	31	55	52	44	42	36	35	31	31	52	49	42	41	35	35	30	30	30	28	
0.8	72	65	57	54	48	46	41	40	69	64	56	53	47	45	40	40	65	60	53	51	45	44	40	39	60	57	51	49	44	43	39	38	38	36	
1	80	72	66	61	56	53	49	47	77	70	64	60	55	53	48	47	72	66	61	58	53	51	47	46	67	63	58	56	51	50	46	45	45	42	
1.25	88	78	74	68	65	61	58	55	84	76	72	67	63	60	57	54	78	72	68	64	61	58	55	53	73	69	65	62	58	57	53	52	52	49	
1.5	94	82	81	73	72	66	64	61	90	80	78	72	70	65	63	60	83	76	74	69	67	64	61	59	77	73	70	67	64	62	59	58	57	55	
2	102	88	91	81	82	75	75	70	97	86	88	79	80	74	74	69	90	82	82	77	76	72	71	68	84	79	77	74	72	70	68	66	65	63	
2.5	107	92	97	86	90	81	83	76	102	90	94	84	87	79	81	75	95	86	88	81	82	77	78	73	88	82	82	78	78	75	74	72	71	68	
3	110	95	102	89	95	85	89	81	106	93	98	88	92	83	87	80	98	89	92	85	87	81	83	78	91	85	86	82	82	79	79	76	75	72	
4	115	98	108	94	102	90	97	86	110	96	104	92	99	88	94	85	102	92	97	89	93	86	89	83	94	88	90	86	87	83	84	81	80	77	
5	118	100	112	96	107	93	102	90	113	98	108	94	103	91	99	89	104	94	100	91	96	89	93	86	96	90	93	88	90	86	88	84	83	80	
7	122	102	117	100	113	97	110	95	116	100	113	98	109	96	106	94	107	97	104	95	102	93	99	91	99	93	97	92	95	90	93	89	87	85	
10	124	104	121	102	118	101	116	99	119	102	116	100	114	99	112	98	110	98	108	97	106	96	104	95	101	95	100	94	98	93	97	92	91	88	

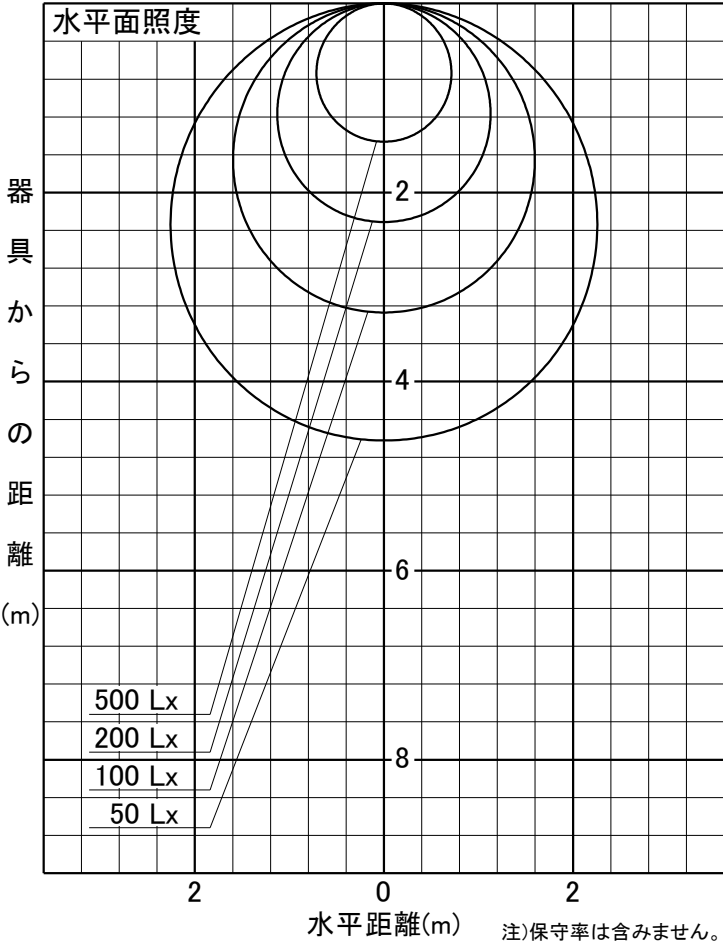

注)保守率は含みません。