

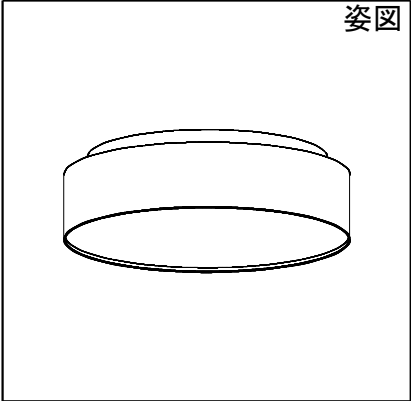


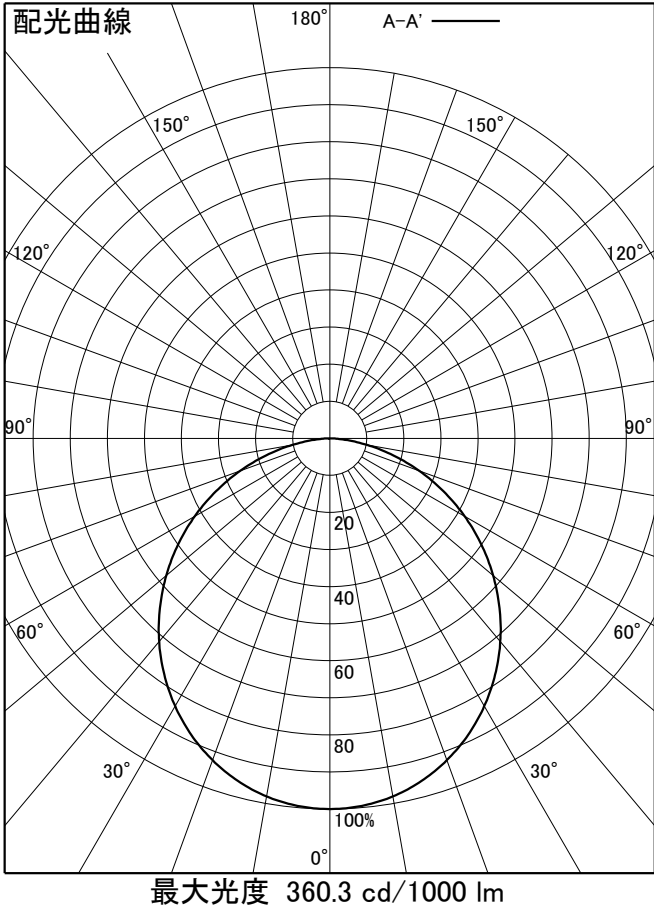

品 番	DCL-42070_5000K
光 源	LED 31.1W 6500K~2700K
定格光束	2820 lm
照度角	64°
ビーム角	110°

器具効率	100.0 %
上方光束	0.2 %
下方光束	99.9 %
器具間隔 最大限 (取付高さH)	A 1.24H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	63	58	49	46	40	39	34	33	62	57	48	46	40	38	34	33	58	55	47	45	39	38	34	33	55	53	45	44	38	38	33	33	33	31	
0.8	74	67	59	56	50	48	43	42	72	66	58	55	49	48	43	42	68	63	56	54	48	47	43	42	64	61	54	52	47	46	42	42	42	40	
1	83	74	68	64	59	56	52	50	80	73	67	63	58	55	51	50	75	70	64	61	57	55	51	50	71	67	62	60	55	54	50	49	49	47	
1.25	90	80	77	71	68	63	61	58	87	79	75	70	67	63	60	58	82	76	72	68	65	62	59	57	77	73	69	66	63	61	58	57	56	54	
1.5	96	85	84	76	75	69	68	64	93	83	82	75	73	69	67	63	87	80	78	73	71	67	65	63	82	77	75	71	69	66	64	62	62	60	
2	104	91	94	84	85	78	79	73	101	89	91	82	84	77	77	73	94	86	87	80	80	76	75	72	89	83	82	79	77	74	73	71	71	69	
2.5	109	94	100	88	93	83	87	79	105	93	97	87	91	83	85	79	99	90	92	85	87	81	82	78	93	87	88	83	83	80	79	77	76	74	
3	113	97	105	92	98	87	93	84	109	95	102	91	96	87	91	83	102	93	96	89	91	85	87	82	96	90	91	87	87	84	84	81	80	78	
4	117	100	111	96	105	92	100	89	113	98	107	95	102	92	98	89	106	96	101	93	97	90	94	87	99	93	96	91	93	88	90	86	85	83	
5	120	102	115	98	110	95	106	93	116	100	111	97	107	95	103	92	108	98	104	95	101	93	98	91	101	95	98	93	96	91	93	89	89	87	
7	124	104	120	102	116	100	113	98	119	103	116	101	113	99	110	97	111	100	109	99	106	97	104	95	104	98	102	96	100	95	99	94	93	91	
10	126	106	124	104	121	103	119	102	122	104	119	103	117	102	115	101	113	102	112	101	110	100	108	99	106	100	105	99	104	98	102	97	96	94	

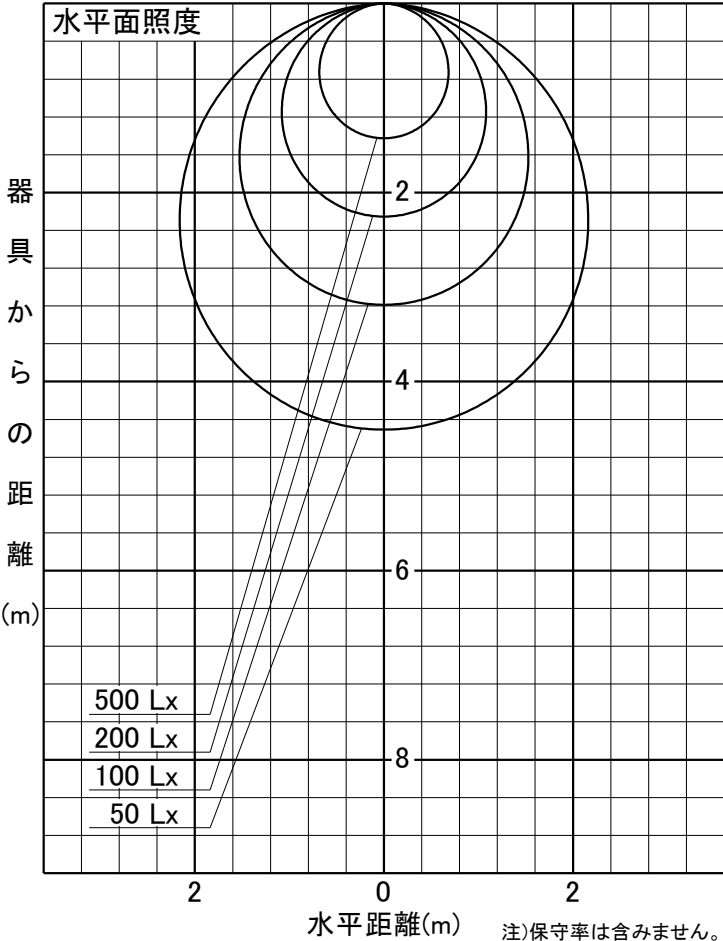

注)保守率は含みません。