



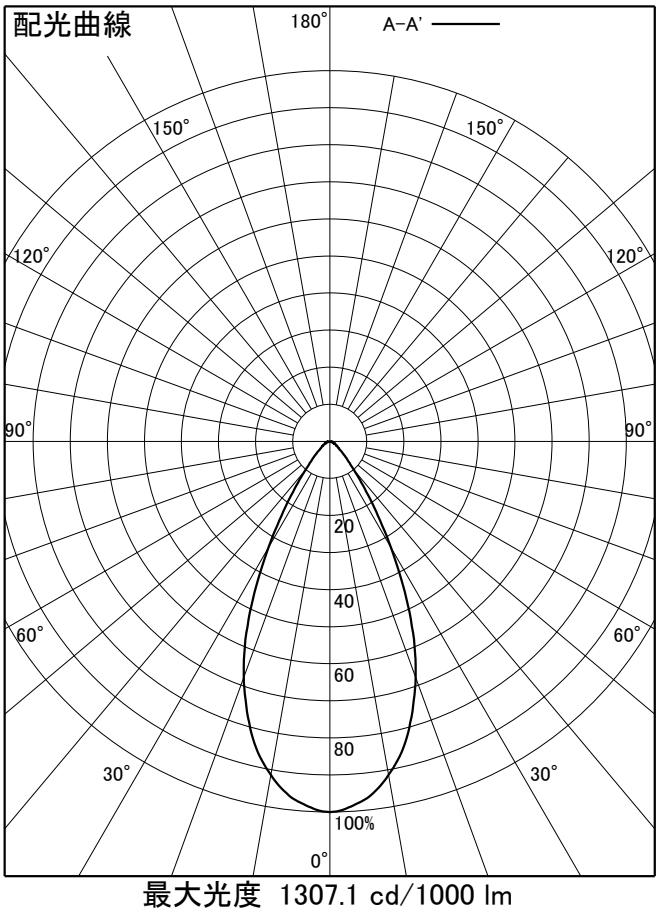

品 番	LZA-93794ASB
光 源	LDR4WW-W-E11/D/S1650V
ランプ光束	475 lm
照度角	43°
ビーム角	50°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.80H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																															(× 0.01)		
室指数																																			
0.6	88	81	78	74	72	70	68	67	86	80	77	74	71	69	68	67	84	79	76	73	71	69	67	66	82	77	75	72	70	69	67	66	66	65	
0.8	95	86	85	80	79	76	74	72	93	86	84	80	78	75	74	72	90	84	82	79	77	75	73	72	87	82	81	78	76	74	73	72	72	70	
1	101	91	92	85	86	81	81	78	99	90	91	85	85	81	80	78	95	88	88	84	83	80	79	78	92	87	86	83	82	80	78	77	77	76	
1.25	107	95	98	90	92	86	87	83	104	94	96	89	90	85	86	83	99	92	93	88	88	85	85	82	95	90	90	87	86	84	83	82	81	80	
1.5	110	97	102	93	96	89	92	87	108	96	100	92	95	89	91	86	102	94	97	91	92	88	89	86	98	92	94	89	90	87	87	85	85	83	
2	116	101	109	97	104	95	100	92	113	100	107	97	102	94	98	92	107	98	102	95	99	93	95	91	102	96	98	94	95	92	93	90	90	88	
2.5	119	103	114	100	109	98	105	96	116	102	111	100	107	98	103	96	110	100	106	98	103	96	100	95	104	98	101	96	99	95	97	94	93	92	
3	122	105	117	103	113	101	110	99	118	104	114	102	111	100	108	99	112	102	109	100	106	99	104	97	106	100	104	98	102	97	100	96	96	94	
4	125	106	121	105	118	103	115	102	121	105	117	104	115	102	112	101	114	103	111	102	109	101	107	100	108	101	106	100	104	99	103	99	98	96	
5	126	107	123	106	121	105	118	104	122	106	120	105	117	104	115	103	115	104	113	103	111	102	110	102	109	102	107	101	106	101	105	100	99	98	
7	129	108	127	108	125	107	123	107	124	107	123	107	121	106	120	106	117	105	116	105	115	105	114	104	110	103	109	103	109	103	108	103	102	100	
10	130	109	129	109	128	109	127	108	126	108	125	108	124	108	123	107	118	106	117	106	116	106	116	106	111	104	110	104	110	104	110	104	103	101	

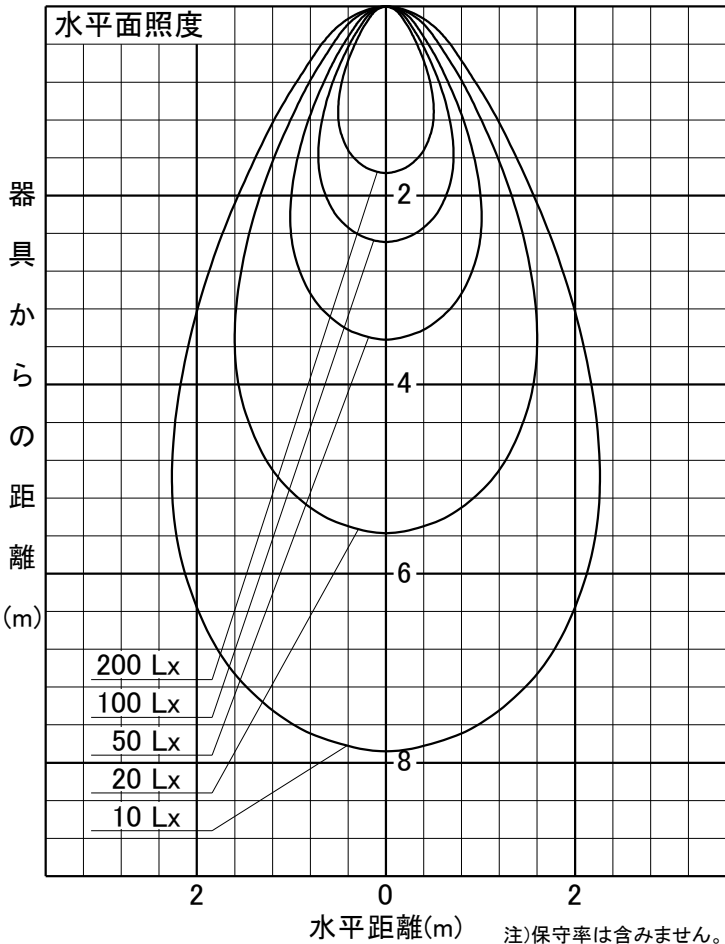

注)保守率は含みません。