



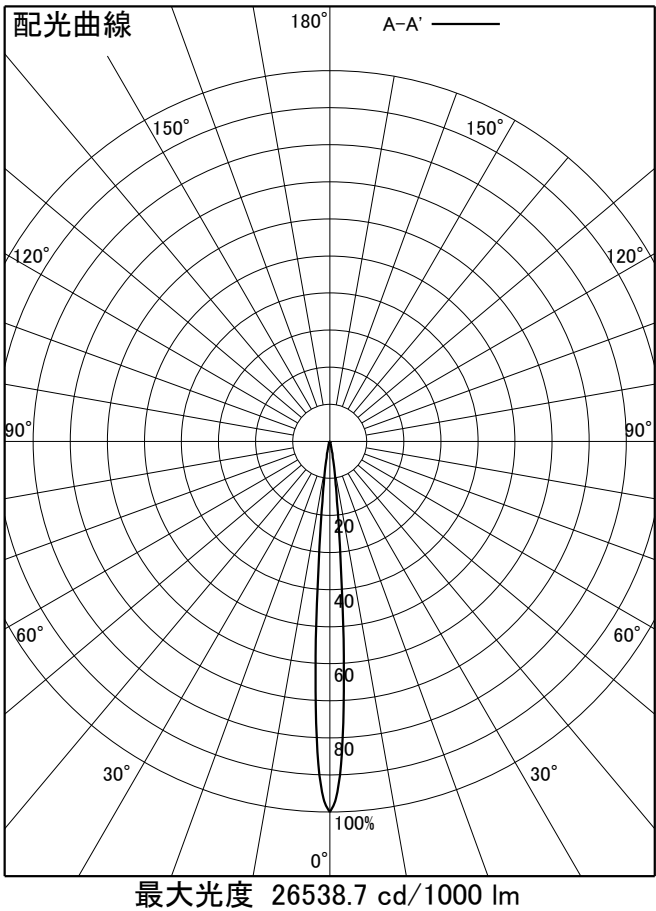

品 番	LZA-93794ASN
光 源	LDR4WW-N-E11/D/S16V
ランプ光束	350 lm
照度角	8°
ビーム角	8°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.15H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井 壁 床	80								70								50								30								20	0		
		70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	90	83	81	77	75	72	71	69	89	82	80	76	74	72	70	69	86	81	79	76	74	72	70	69	84	80	77	75	73	72	70	69	69	68			
0.8	97	88	88	82	81	78	77	75	96	88	87	82	81	78	76	75	92	86	85	81	79	77	76	74	89	84	83	80	78	77	75	74	74	73			
1	103	93	94	87	88	83	83	80	101	92	93	87	87	83	83	80	97	90	90	86	85	82	82	80	94	88	88	85	84	82	81	79	79	78			
1.25	108	96	100	91	94	88	89	85	106	95	98	91	92	87	88	85	101	93	95	90	90	87	87	84	97	92	92	88	88	86	85	84	83	82			
1.5	112	99	104	94	98	91	94	88	109	98	102	94	97	91	93	88	104	96	99	92	94	90	91	87	100	94	95	91	92	89	89	87	86	85			
2	118	102	111	99	106	96	101	94	114	101	108	98	104	96	100	94	109	99	104	97	100	95	97	93	104	97	100	95	97	93	95	92	91	90			
2.5	121	105	116	102	111	100	107	98	118	103	113	101	109	99	105	97	111	101	108	100	105	98	102	96	106	100	103	98	101	97	99	95	95	93			
3	124	106	119	104	115	102	112	101	120	105	116	103	112	102	109	100	113	103	110	102	108	100	105	99	108	101	105	100	103	99	102	98	97	96			
4	126	108	123	106	120	105	117	104	123	107	119	105	117	104	114	103	115	104	113	103	111	103	109	102	109	103	108	102	106	101	105	100	100	98			
5	128	108	125	107	123	107	120	106	124	107	121	106	119	106	117	105	117	105	115	105	113	104	112	103	110	103	109	103	108	102	107	102	101	100			
7	131	110	129	109	127	109	125	109	126	109	125	108	123	108	122	108	118	107	117	107	116	106	115	106	112	105	111	105	110	105	110	104	104	102			
10	132	110	131	110	130	110	129	110	128	109	127	109	126	109	125	109	119	107	119	107	118	107	118	107	112	105	112	106	112	106	111	106	105	103			

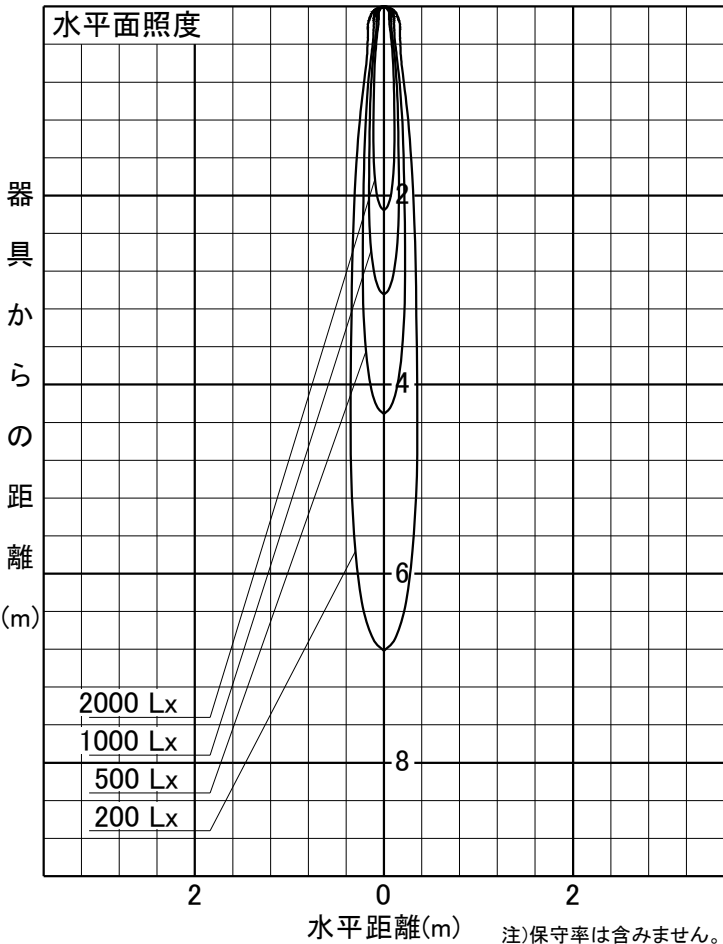

注)保守率は含みません。