


姿図

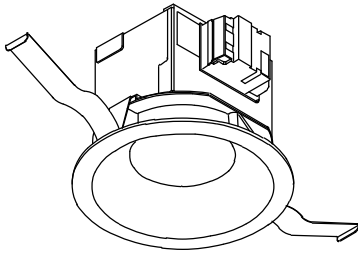

品番	DDL-5104AW
光源	LED 7.6W 3500K
定格光束	760.0 lm
1/2照度角	64°
ビーム角	92°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.24 H
	B 1.24 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20			20			20			20			0		
室指数	照 明 率 ( × 0.01 )														
0.6	56	49	44	56	49	44	54	48	44	53	48	43	42		
0.8	67	59	54	66	59	54	64	58	53	63	57	53	51		
1	75	68	62	74	67	62	72	66	62	70	65	61	59		
1.25	82	76	70	81	75	70	79	73	69	77	72	68	66		
1.5	88	81	77	86	81	76	84	79	75	81	77	74	71		
2	95	90	86	94	89	85	91	87	83	88	85	82	78		
2.5	100	95	91	98	94	90	95	91	88	92	89	87	83		
3	103	99	96	102	98	95	98	95	92	95	92	90	86		
4	107	104	101	105	102	99	101	99	96	98	96	94	89		
5	109	106	104	107	104	102	103	101	99	99	98	96	91		

