



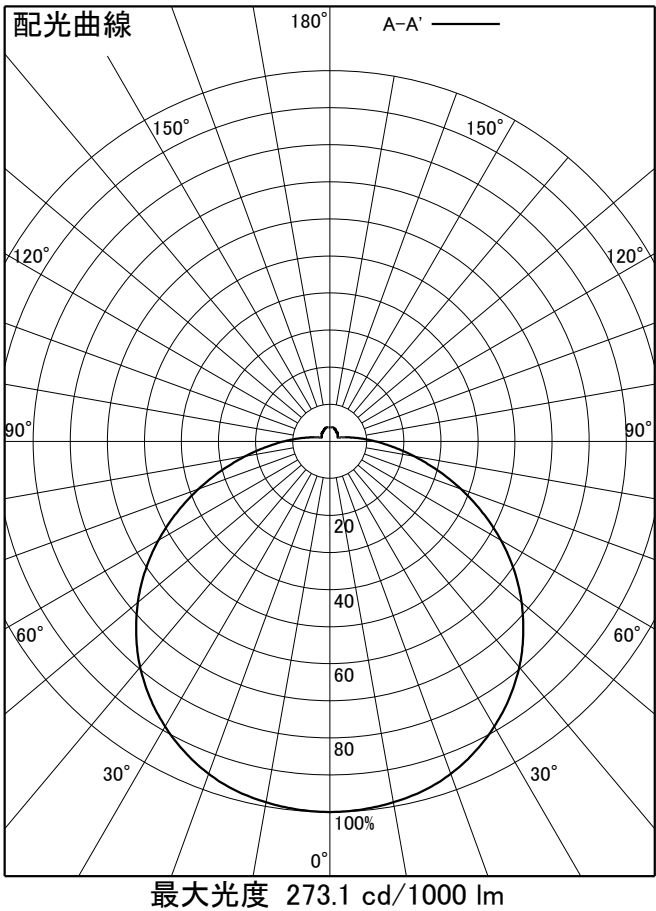

品 番	DCL-42117_5000K
光 源	LED 35.5W 6500K~2700K
定格光束	4899 lm
照度角	67°
ビーム角	124°

器具効率	100.0 %
上方光束	7.3 %
下方光束	92.7 %
器具間隔 最大限 (取付高さH)	A 1.32H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																																(× 0.01)	
室指数																																			
0.6	59	55	44	42	35	34	29	29	57	53	43	41	34	34	29	28	53	50	41	39	33	33	28	28	49	47	39	38	32	32	27	27	27	25	
0.8	70	63	54	51	45	43	38	37	67	61	53	50	44	42	37	36	62	58	50	48	42	41	36	36	57	54	48	46	41	40	35	35	35	32	
1	78	70	63	58	53	50	46	44	75	68	61	57	52	49	45	44	69	64	58	55	50	48	44	43	64	60	54	52	48	46	42	42	41	39	
1.25	85	76	71	65	61	57	54	51	82	74	69	64	60	57	53	51	75	69	65	61	57	55	51	50	70	66	61	59	55	53	49	48	48	45	
1.5	91	80	78	71	68	63	61	57	87	78	75	69	66	62	59	56	80	74	71	66	63	60	57	55	74	70	66	63	60	58	55	54	53	50	
2	99	86	88	78	79	72	71	66	95	84	85	77	76	70	70	65	87	80	79	73	72	68	67	64	80	75	74	70	68	66	64	62	61	58	
2.5	104	90	94	83	86	77	79	72	100	88	91	81	83	76	77	71	92	83	84	78	78	73	73	69	84	79	79	75	74	71	70	67	67	63	
3	108	93	99	87	92	82	85	77	103	91	95	85	89	80	83	76	95	86	89	82	83	77	78	74	87	82	82	78	78	75	74	72	71	68	
4	113	96	105	91	99	87	93	83	108	94	101	89	96	85	90	82	99	90	94	86	89	82	85	79	91	85	87	82	83	80	80	77	76	73	
5	116	98	110	94	104	90	99	87	111	96	105	92	100	89	96	86	101	92	97	89	93	86	90	83	93	88	90	85	87	83	84	80	79	76	
7	120	101	115	98	111	95	107	92	115	99	110	96	106	93	103	91	105	95	102	92	99	90	96	88	97	91	94	89	92	87	90	85	84	81	
10	123	103	119	101	116	99	113	97	117	101	114	99	111	97	109	95	107	97	105	95	103	93	101	92	99	93	97	91	95	90	94	89	88	84	

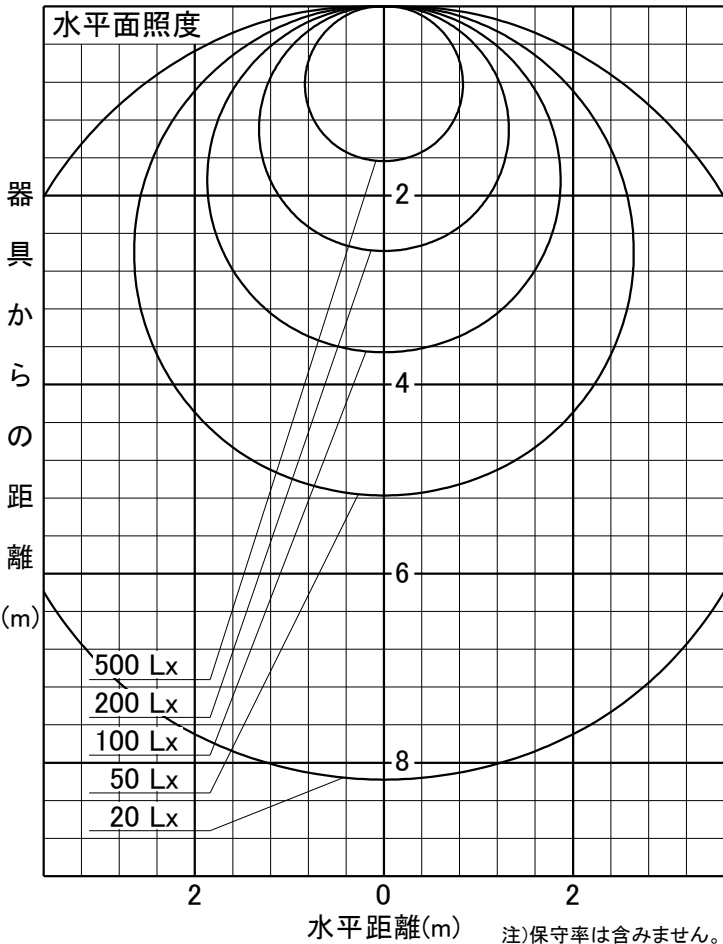

注)保守率は含みません。