



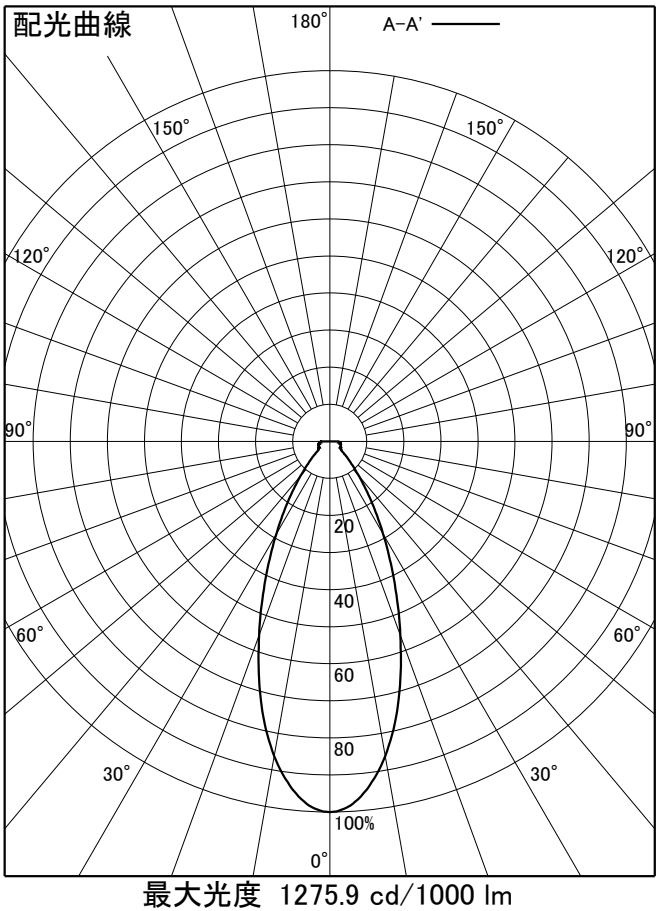

品 番	TRK48-VL011LB
光 源	LED 6.4W 2700K
定格光束	200 lm
1/2照度角	38°
1/2ビーム角	44°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.68H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																																(× 0.01)	
室指数																																			
0.6	82	76	71	67	64	62	59	58	80	75	70	67	64	62	59	58	78	73	69	66	63	61	59	58	75	71	67	65	62	61	58	58	58	57	
0.8	90	82	78	74	71	68	66	64	88	80	77	73	70	68	66	64	84	78	75	72	69	67	65	64	81	76	73	71	68	67	64	63	63	62	
1	96	86	85	79	78	74	72	70	94	85	84	78	77	74	72	70	89	83	81	77	75	73	71	69	86	81	79	76	74	72	70	69	69	67	
1.25	102	90	91	84	84	79	79	75	99	89	90	83	83	78	78	75	94	87	86	81	81	77	76	74	90	84	84	80	79	76	75	74	73	72	
1.5	106	93	96	87	89	83	84	79	103	92	94	86	88	82	83	79	97	89	90	85	85	81	81	78	93	87	87	83	83	80	79	77	77	75	
2	112	97	104	92	97	88	92	85	108	96	101	91	95	88	90	85	102	93	96	90	92	86	88	84	97	91	92	88	88	85	85	83	82	81	
2.5	116	100	109	96	103	92	98	90	112	99	106	95	101	92	96	89	105	96	101	93	96	90	93	88	100	94	96	91	93	89	90	87	86	84	
3	119	102	112	98	107	95	103	93	115	100	109	97	105	95	101	92	108	98	104	95	100	93	97	91	102	96	98	93	96	91	93	90	89	87	
4	122	104	117	101	112	99	108	96	118	102	113	100	109	98	106	96	110	100	107	98	104	96	101	94	104	98	101	96	99	94	97	93	92	90	
5	124	105	120	103	116	101	112	99	120	104	116	102	113	100	110	98	112	101	109	99	107	98	104	96	105	99	103	97	101	96	99	95	94	92	
7	127	107	124	105	121	104	118	103	122	105	120	104	117	103	115	102	114	103	112	102	111	101	109	100	107	101	106	100	104	99	103	98	97	95	
10	129	108	127	107	125	106	123	105	124	107	122	106	121	105	119	104	116	104	114	103	113	103	112	102	109	102	108	101	107	101	106	100	99	97	

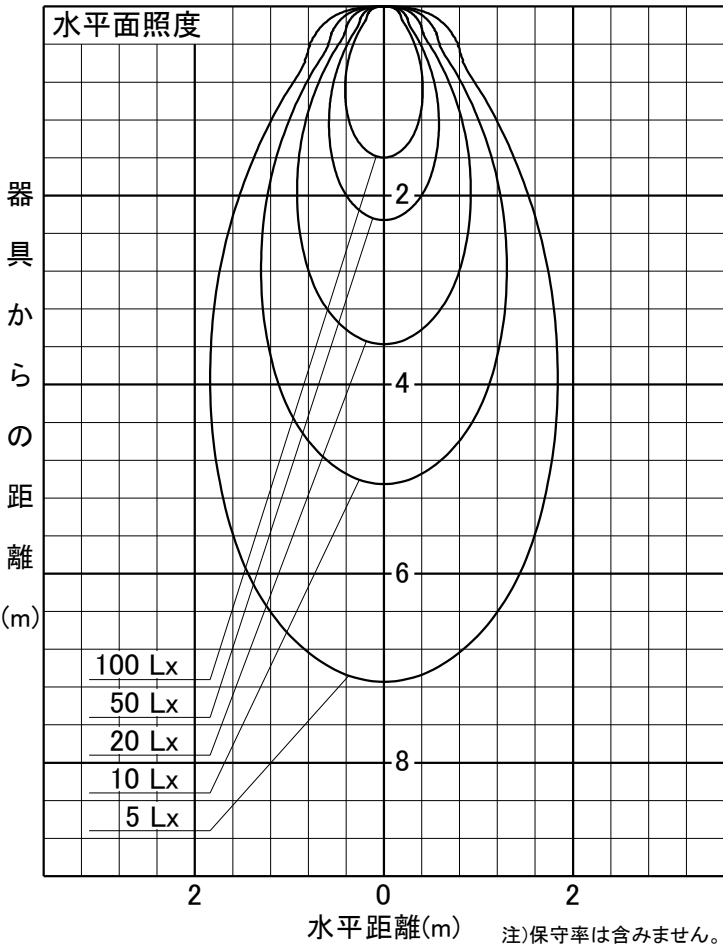

注)保守率は含みません。