



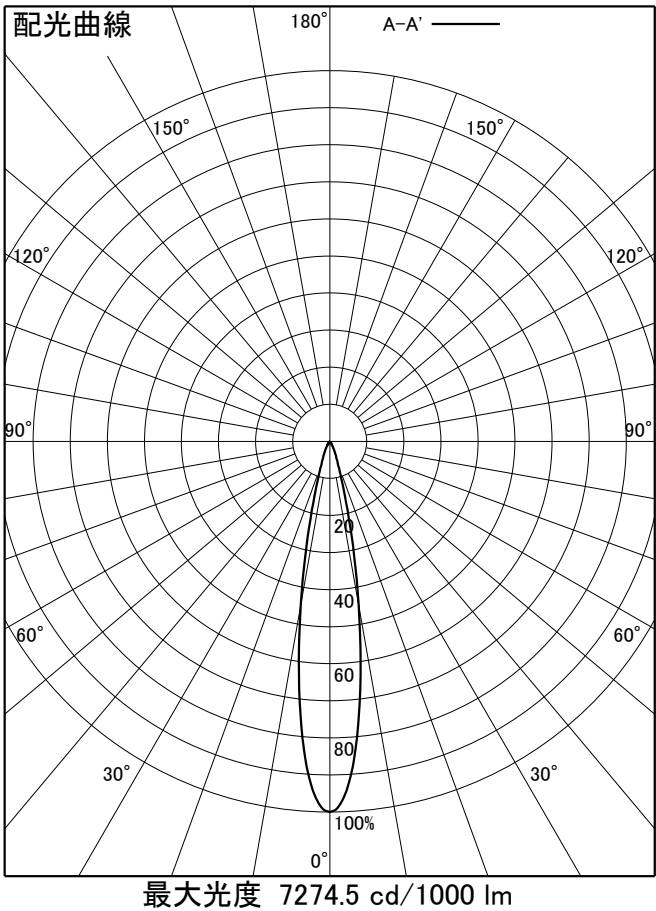

品 番	TRK48-VL012LB
光 源	LED 6.4W 2700K
定格光束	425 lm
1/2照度角	18°
1/2ビーム角	19°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.32H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0	
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
	室指数	照 明 率																																(× 0.01)		
0.6	96	88	87	83	81	79	78	77	94	87	86	82	81	79	78	77	92	86	85	82	80	79	77	76	90	85	84	81	80	78	77	76	76	75		
0.8	102	92	93	87	87	84	83	81	100	92	92	87	87	84	83	81	97	90	90	86	86	83	82	81	94	89	88	85	84	83	82	81	80	79		
1	107	96	99	92	93	89	89	86	105	96	98	91	93	88	89	86	101	94	95	90	91	88	88	86	98	93	93	89	89	87	87	85	85	84		
1.25	112	99	104	95	99	92	94	90	109	98	102	95	97	92	94	90	105	97	99	94	95	91	92	89	101	95	97	93	93	90	91	89	89	87		
1.5	115	101	108	98	103	95	99	93	112	100	106	97	101	95	98	93	107	99	102	96	99	94	95	92	103	97	99	95	96	93	94	91	91	90		
2	120	104	114	102	109	100	106	98	117	103	112	101	107	99	104	98	111	102	107	100	104	98	101	97	106	100	103	98	101	97	99	96	95	94		
2.5	123	106	118	104	114	103	111	101	120	105	115	104	112	102	109	101	114	103	110	102	108	101	105	100	108	102	106	101	104	100	102	99	98	97		
3	125	107	121	106	118	105	115	104	122	107	118	105	115	104	113	103	115	105	113	104	111	103	109	102	110	103	108	102	106	102	105	101	100	99		
4	128	109	125	108	122	107	119	106	124	108	121	107	119	106	117	106	117	106	115	105	113	105	112	104	111	104	109	104	108	103	107	103	102	101		
5	129	109	127	109	124	108	123	108	125	108	123	108	121	107	119	107	118	106	116	106	115	106	114	105	111	105	110	104	110	104	109	104	103	102		
7	131	110	130	110	129	110	127	110	127	109	126	109	125	109	124	109	119	108	119	108	118	108	117	108	113	106	112	106	112	106	111	106	105	104		
10	133	111	132	111	131	111	130	112	128	110	127	110	127	110	126	111	120	108	120	108	119	108	119	109	113	106	113	106	113	107	113	107	106	104		

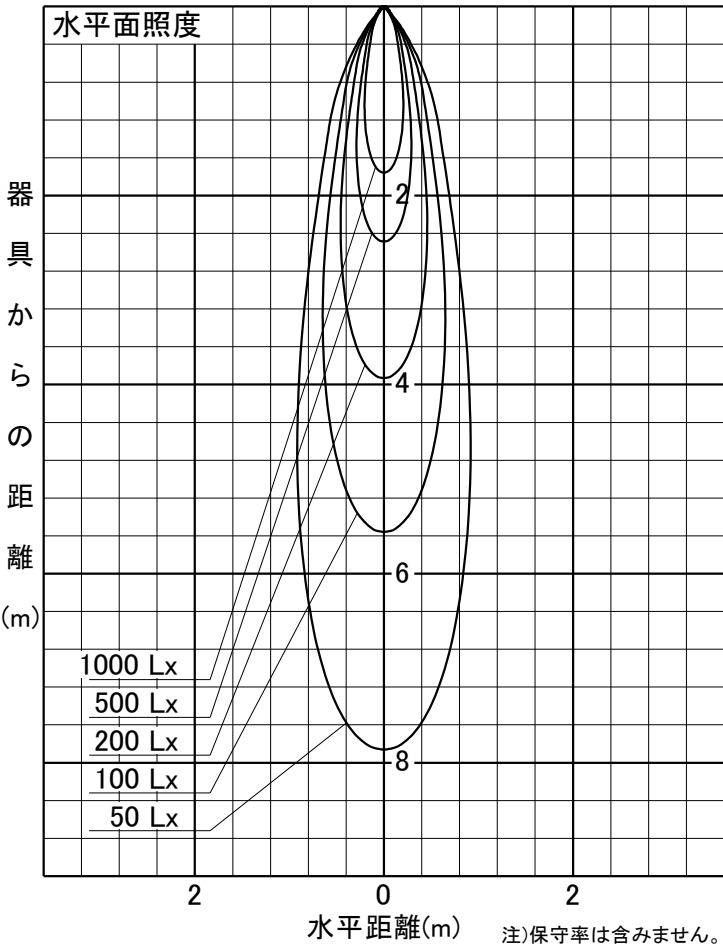

注)保守率は含みません。