



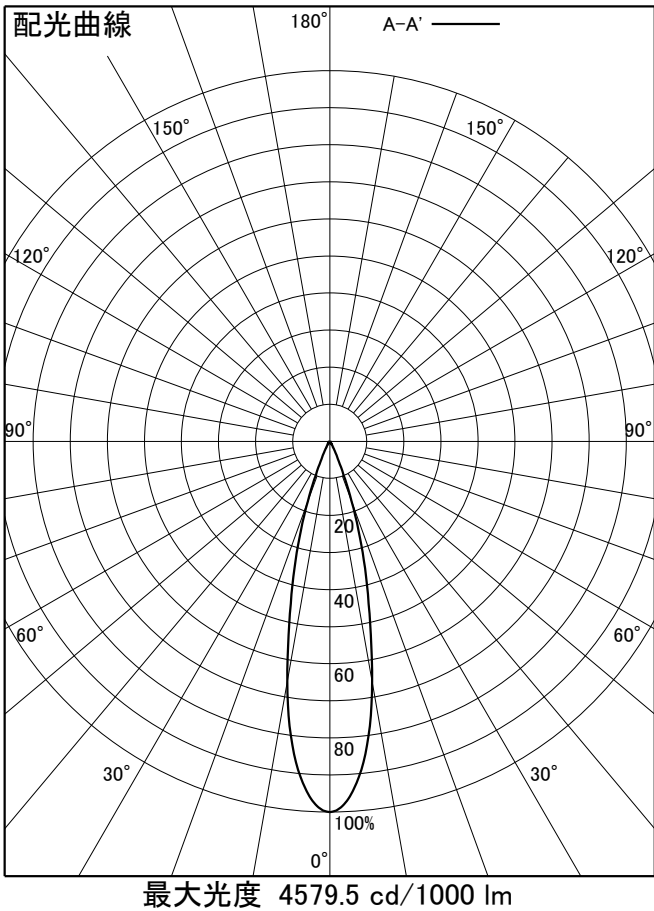

品 番	TRK48-VL013LW
光 源	LED 6.5W 2700K
定格光束	275 lm
1/2照度角	24°
1/2ビーム角	25°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.43H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	95	87	86	82	80	78	77	76	93	86	85	81	80	78	77	75	91	85	84	81	79	78	76	75	89	84	83	80	79	77	76	75	74		
0.8	101	92	92	86	86	83	82	80	99	91	91	86	86	83	82	80	96	89	89	85	85	82	81	80	93	88	87	84	83	82	80	80	79	78	
1	106	96	98	91	92	88	88	85	104	95	97	90	92	87	88	85	101	93	94	89	90	87	87	85	97	92	92	89	88	86	86	84	84	83	
1.25	111	98	103	94	98	91	93	89	108	98	101	94	96	91	93	89	104	96	98	93	94	90	91	88	100	94	96	92	92	90	90	88	88	86	
1.5	114	101	107	97	102	94	98	92	111	100	105	96	100	94	96	92	106	98	101	95	98	93	94	91	102	96	98	94	95	92	93	90	90	89	
2	119	104	113	101	108	99	105	97	116	103	111	100	107	98	103	97	110	101	106	99	103	97	100	96	105	99	102	97	100	96	98	95	94	93	
2.5	122	105	117	103	113	102	110	100	119	104	114	103	111	101	108	100	113	103	109	101	107	100	104	99	107	101	105	100	103	99	101	98	97	96	
3	125	107	120	105	117	104	114	103	121	106	117	105	114	103	112	102	114	104	112	103	110	102	108	101	109	102	107	101	105	101	104	100	100	98	
4	127	108	124	107	121	106	118	105	123	107	120	106	118	105	116	105	116	105	114	104	112	104	111	103	110	103	109	103	107	102	106	102	101	100	
5	128	109	126	108	124	107	122	107	124	108	122	107	120	107	119	106	117	106	116	105	114	105	113	105	111	104	110	104	109	103	108	103	102	101	
7	131	110	129	110	128	110	126	110	126	109	125	109	124	109	123	109	119	107	118	107	117	107	116	107	112	105	111	105	111	105	111	105	104	103	
10	132	110	131	110	130	111	129	111	127	109	127	109	126	110	125	110	119	107	119	107	119	108	118	108	112	105	112	106	112	106	112	106	105	103	

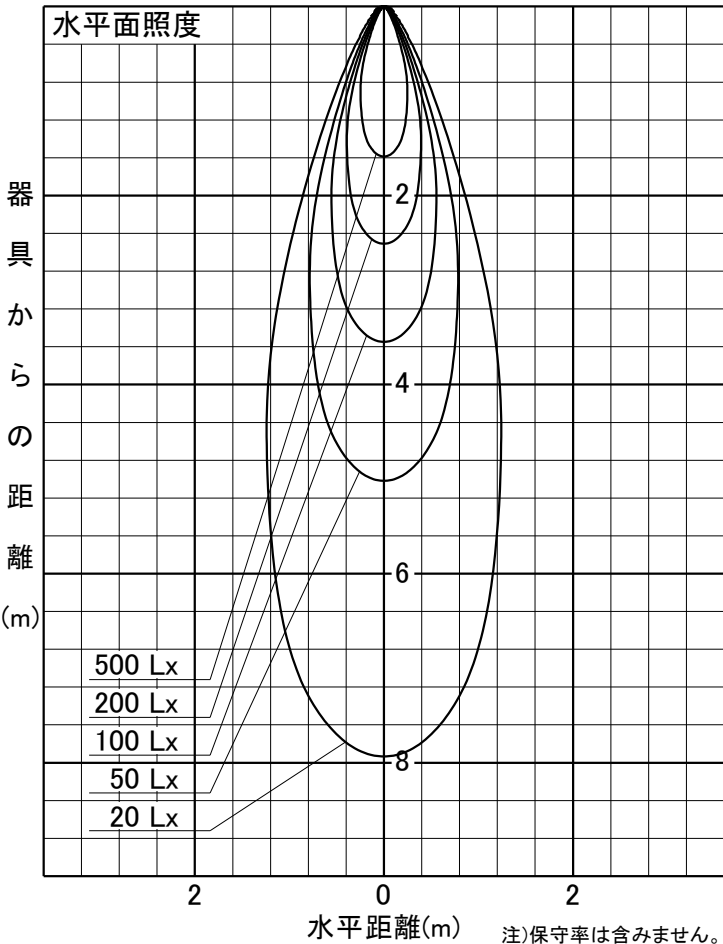

注)保守率は含みません。