



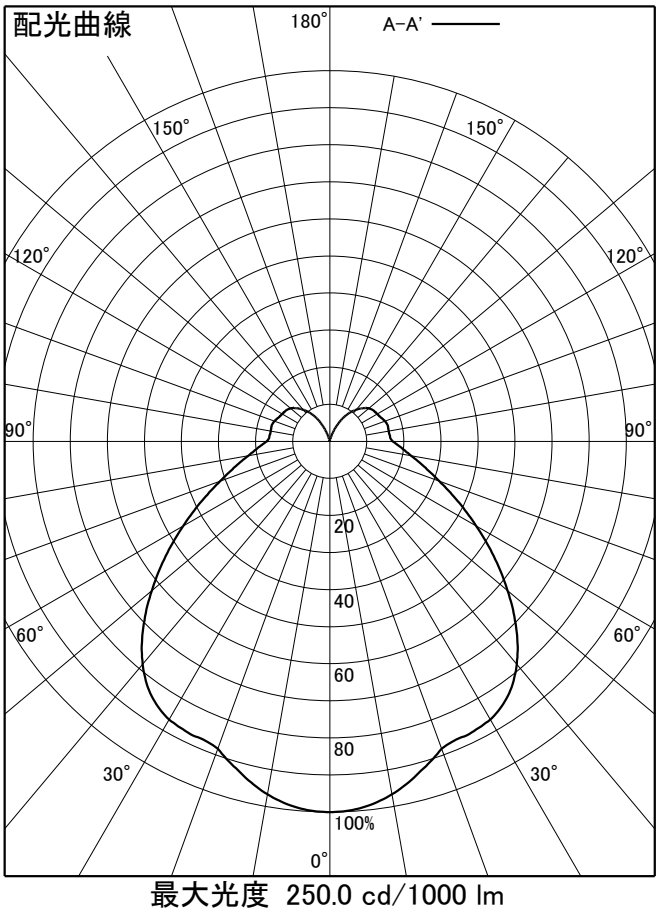

品 番	TRK48-VL015LB
光 源	LED 5.3W 2700K
定格光束	375 lm
1/2照度角	66°
1/2ビーム角	115°

器具効率	100.0 %
上方光束	20.4 %
下方光束	79.6 %
器具間隔 最大限 (取付高さH)	A 1.30H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0	
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
	室指数	照 明 率																																(× 0.01)		
0.6	58	53	43	41	35	34	29	28	55	51	42	40	34	33	28	28	50	47	39	37	32	31	27	26	45	43	36	35	30	29	25	25	25	22		
0.8	68	62	54	50	44	42	37	36	65	59	51	49	43	41	36	36	58	54	47	45	40	39	34	34	52	49	44	42	37	36	33	32	31	28		
1	76	68	62	57	52	49	45	44	72	65	59	55	50	48	44	42	65	60	54	51	47	45	41	40	58	55	50	48	44	42	39	38	37	34		
1.25	84	74	70	64	60	56	53	51	79	71	67	62	58	55	51	49	71	65	61	57	54	52	48	47	63	60	56	53	50	48	45	44	43	39		
1.5	89	78	76	69	67	62	59	56	84	75	73	67	64	60	58	55	75	69	66	62	59	56	54	52	67	63	60	58	55	53	50	49	48	43		
2	97	84	85	76	77	70	70	65	91	81	81	74	74	68	67	63	81	74	74	69	67	64	62	59	73	68	67	64	62	60	58	56	54	50		
2.5	102	88	92	81	84	75	77	71	96	84	87	78	80	73	74	69	85	78	79	73	73	68	68	65	76	72	71	68	67	64	63	61	59	55		
3	105	90	96	84	89	79	83	75	99	87	91	81	85	77	79	73	88	80	82	76	77	72	73	69	79	74	74	71	71	67	67	65	63	58		
4	110	93	102	89	96	84	91	81	103	90	97	86	91	82	86	78	92	83	87	80	83	77	79	74	82	77	78	74	75	72	72	69	67	62		
5	113	95	106	91	101	88	96	84	106	92	101	88	96	85	91	82	94	85	90	82	86	79	83	77	84	79	81	76	78	74	76	72	70	65		
7	116	98	112	95	107	92	103	89	110	94	105	92	102	89	98	87	97	88	94	86	91	84	89	82	87	82	85	80	82	78	80	77	74	69		
10	119	100	116	98	112	95	109	93	112	96	109	94	106	92	104	91	100	90	97	88	95	87	93	85	89	83	87	82	86	81	84	80	77	72		

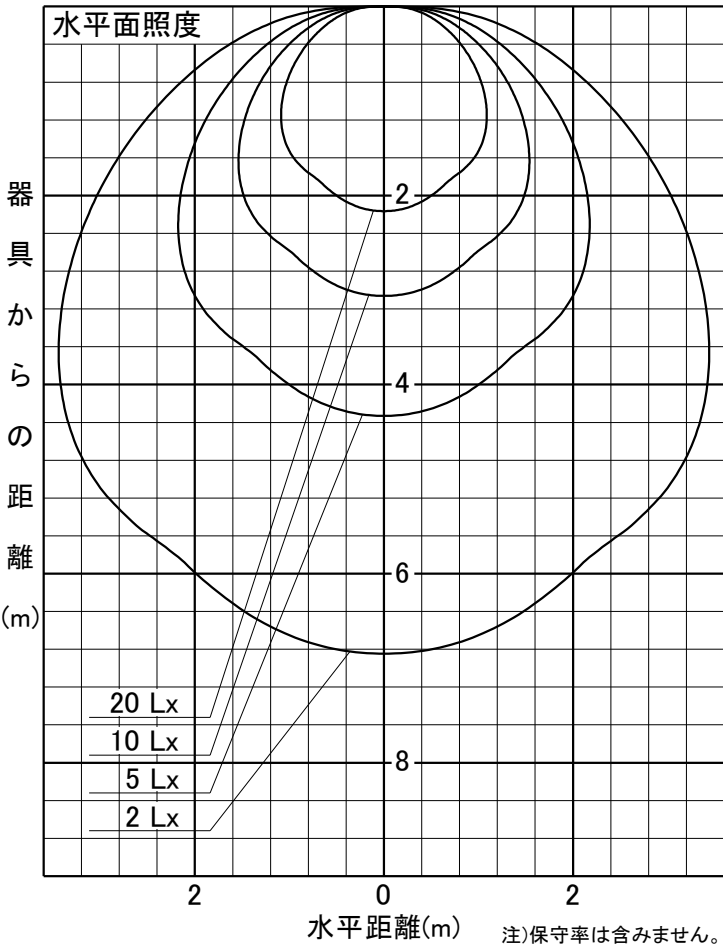

注)保守率は含みません。