



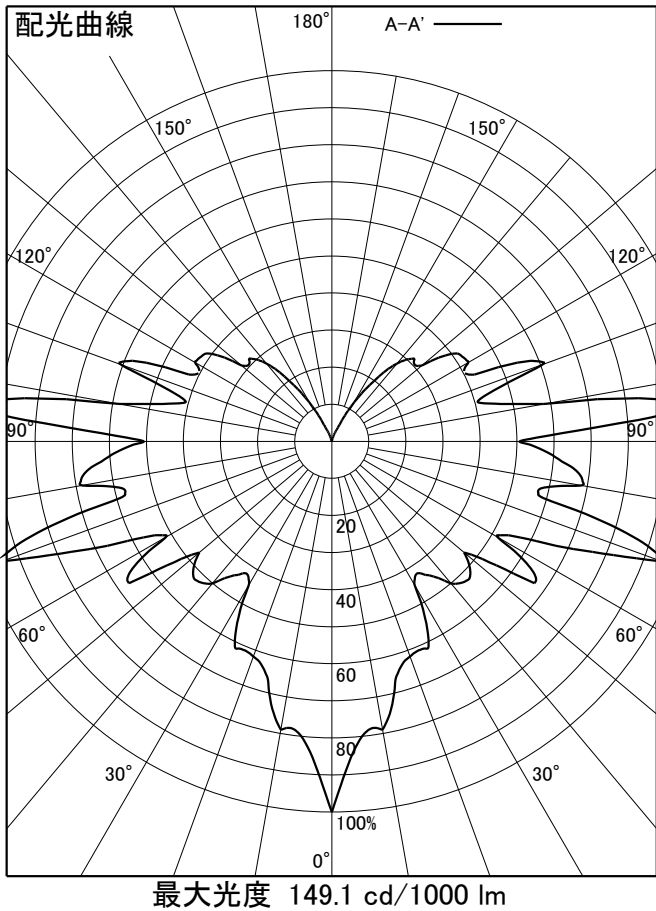

品 番	DPN-42568YG
光 源	LDC4L-W-E17/D/C40V <DAIKO>
ランプ光束	450 lm
照度角	42°
ビーム角	57°

器具効率	95.6 %
上方光束	38.4 %
下方光束	57.2 %
器具間隔 最大限 (取付高さH)	A 0.78H
保 守 率	良 0.63 中 0.60 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	48	44	33	32	25	24	19	19	44	41	31	30	23	22	18	17	37	35	27	26	20	20	15	15	31	29	22	22	17	17	13	13	12	9			
0.8	56	51	42	39	32	31	25	25	52	47	38	36	30	29	24	23	43	40	33	31	26	25	20	20	35	33	27	26	22	21	17	17	16	11			
1	63	57	48	45	38	36	31	30	58	52	45	42	36	34	29	28	48	44	38	36	31	29	25	24	39	37	32	30	26	25	21	21	19	14			
1.25	70	62	55	51	45	42	37	36	64	57	51	47	42	40	35	34	53	49	43	41	36	34	30	29	43	41	36	34	30	29	25	25	23	17			
1.5	75	66	61	55	51	47	43	41	68	61	56	52	47	44	40	38	57	52	47	44	40	38	35	33	46	43	39	38	34	33	29	29	26	20			
2	82	72	70	62	60	55	52	48	75	66	64	58	56	51	49	46	62	57	54	50	47	45	42	40	51	48	45	43	40	38	35	34	32	25			
2.5	87	75	76	67	67	60	59	54	80	70	70	63	62	56	55	51	66	60	59	54	53	49	47	45	54	51	49	46	44	42	40	39	36	29			
3	91	78	81	71	72	64	65	59	83	73	74	66	67	60	60	55	69	63	62	57	57	53	52	49	57	53	52	49	47	45	44	42	39	31			
4	96	82	87	75	80	70	73	65	88	76	80	71	74	66	68	61	73	66	67	62	62	58	58	54	60	56	56	53	52	50	49	47	43	36			
5	99	84	92	79	85	74	79	69	91	78	84	74	78	69	73	65	76	68	71	64	66	61	62	58	62	59	59	56	56	53	52	50	46	38			
7	103	87	97	83	92	79	87	75	95	81	89	78	85	74	80	71	79	71	75	68	72	65	68	63	65	61	63	59	60	57	58	55	51	43			
10	106	89	102	86	98	83	94	80	98	84	94	81	90	78	87	76	82	74	79	71	76	69	74	67	68	64	66	62	64	60	62	59	55	46			

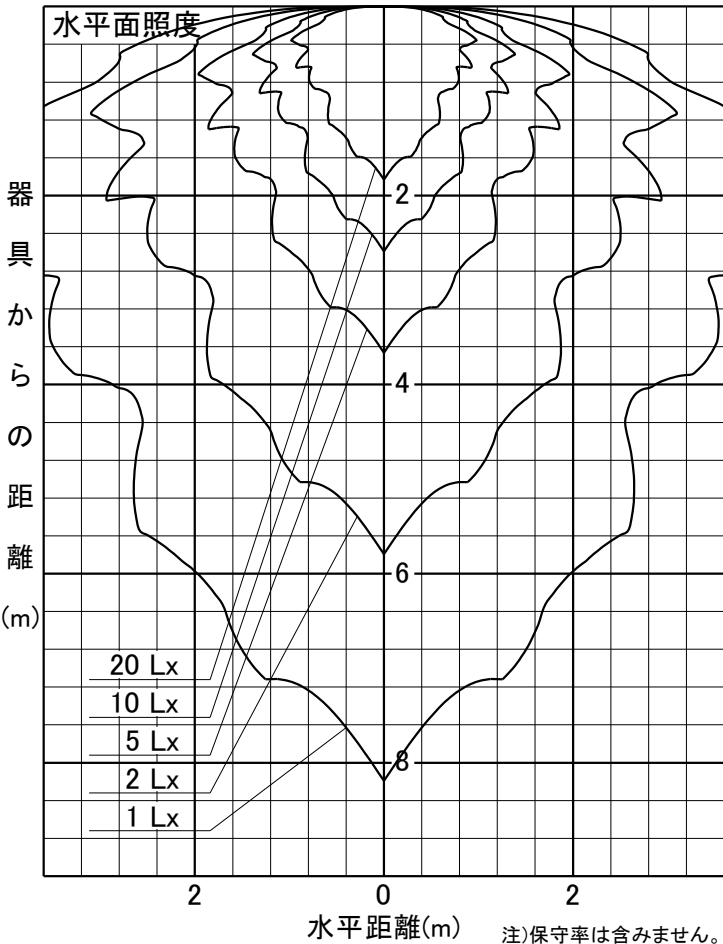

注)保守率は含みません。