

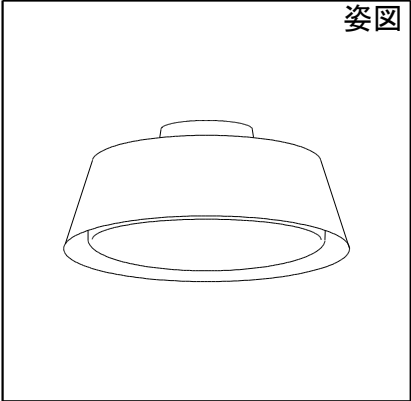


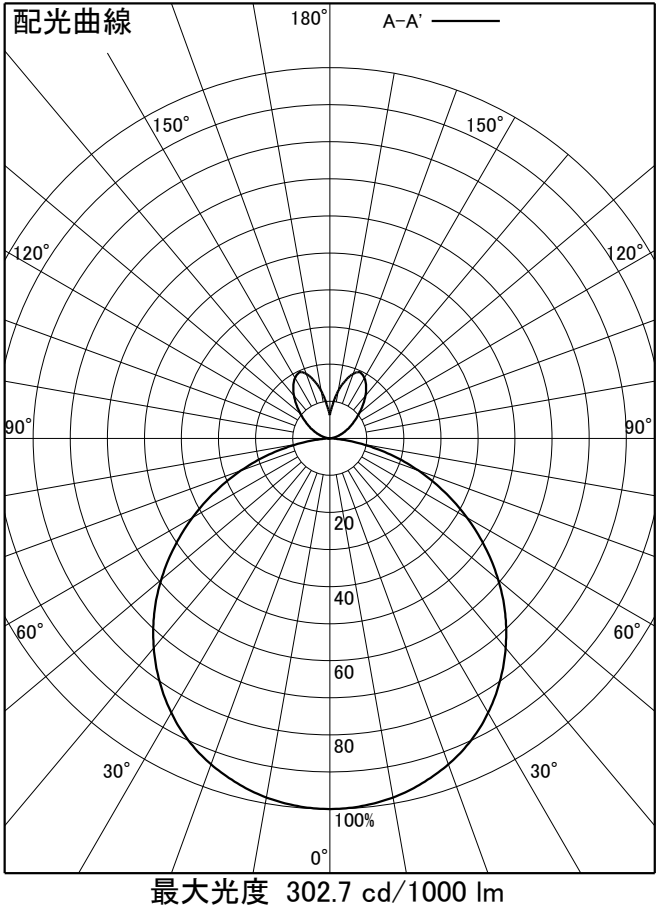

品 番	DCL-41935E_all_4700K _before change
光 源	LED 40W 6500K～2700K
定格光束	4250 lm
照度角	65°
ビーム角	111°

器具効率	100.0 %
上方光束	15.1 %
下方光束	84.9 %
器具間隔 最大限 (取付高さH)	A 1.27H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0	
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0	
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
		照 明 率																															(× 0.01)			
室指数																																				
0.6	61	56	47	45	38	37	32	32	58	54	45	43	37	36	32	31	54	50	43	41	36	35	31	30	50	47	40	39	34	34	30	29	29	27		
0.8	72	65	57	54	48	46	42	41	68	63	56	52	47	45	41	40	63	58	52	50	45	43	39	39	57	54	49	47	42	42	38	37	37	34		
1	80	72	66	61	57	54	50	48	76	69	64	60	55	53	49	47	70	64	60	56	52	50	47	46	64	60	56	53	50	48	45	44	43	40		
1.25	87	78	75	68	65	61	59	56	83	75	72	66	63	60	57	55	76	70	67	63	60	57	54	53	69	65	62	59	56	55	52	51	50	47		
1.5	93	82	81	74	72	67	65	62	89	79	78	71	70	65	64	61	81	74	72	68	66	62	60	58	73	69	67	64	62	60	57	56	55	51		
2	101	88	91	81	83	75	76	71	96	85	87	79	80	74	74	69	87	80	80	74	74	70	70	66	79	75	74	70	69	67	66	64	62	59		
2.5	106	91	97	86	90	81	84	77	101	89	93	83	86	79	81	75	91	83	85	79	80	75	76	72	83	78	79	75	75	72	71	69	67	64		
3	110	94	102	89	95	85	90	81	104	91	97	87	91	83	87	79	94	86	89	82	85	79	81	76	86	81	82	78	78	75	75	73	71	67		
4	114	97	107	93	102	90	97	87	108	94	103	91	98	87	94	85	98	89	94	86	90	83	87	81	89	83	86	81	83	79	81	77	75	71		
5	117	99	111	95	106	93	102	90	111	96	106	93	102	90	98	88	100	90	97	88	93	86	91	84	91	85	88	83	86	82	84	80	78	74		
7	120	101	116	99	113	97	109	95	114	98	111	96	108	94	105	93	103	93	101	91	98	90	96	88	93	88	92	86	90	85	88	84	82	78		
10	123	102	120	101	117	100	115	98	116	100	114	98	112	97	110	96	105	94	103	93	102	92	100	91	95	89	94	89	93	88	92	87	85	80		

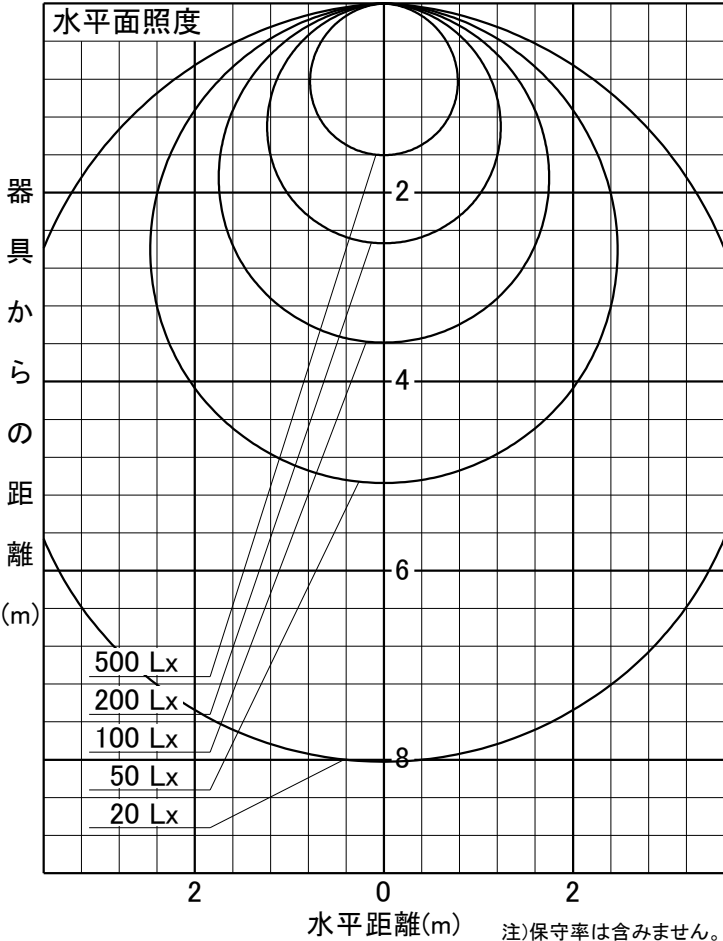

注)保守率は含みません。